


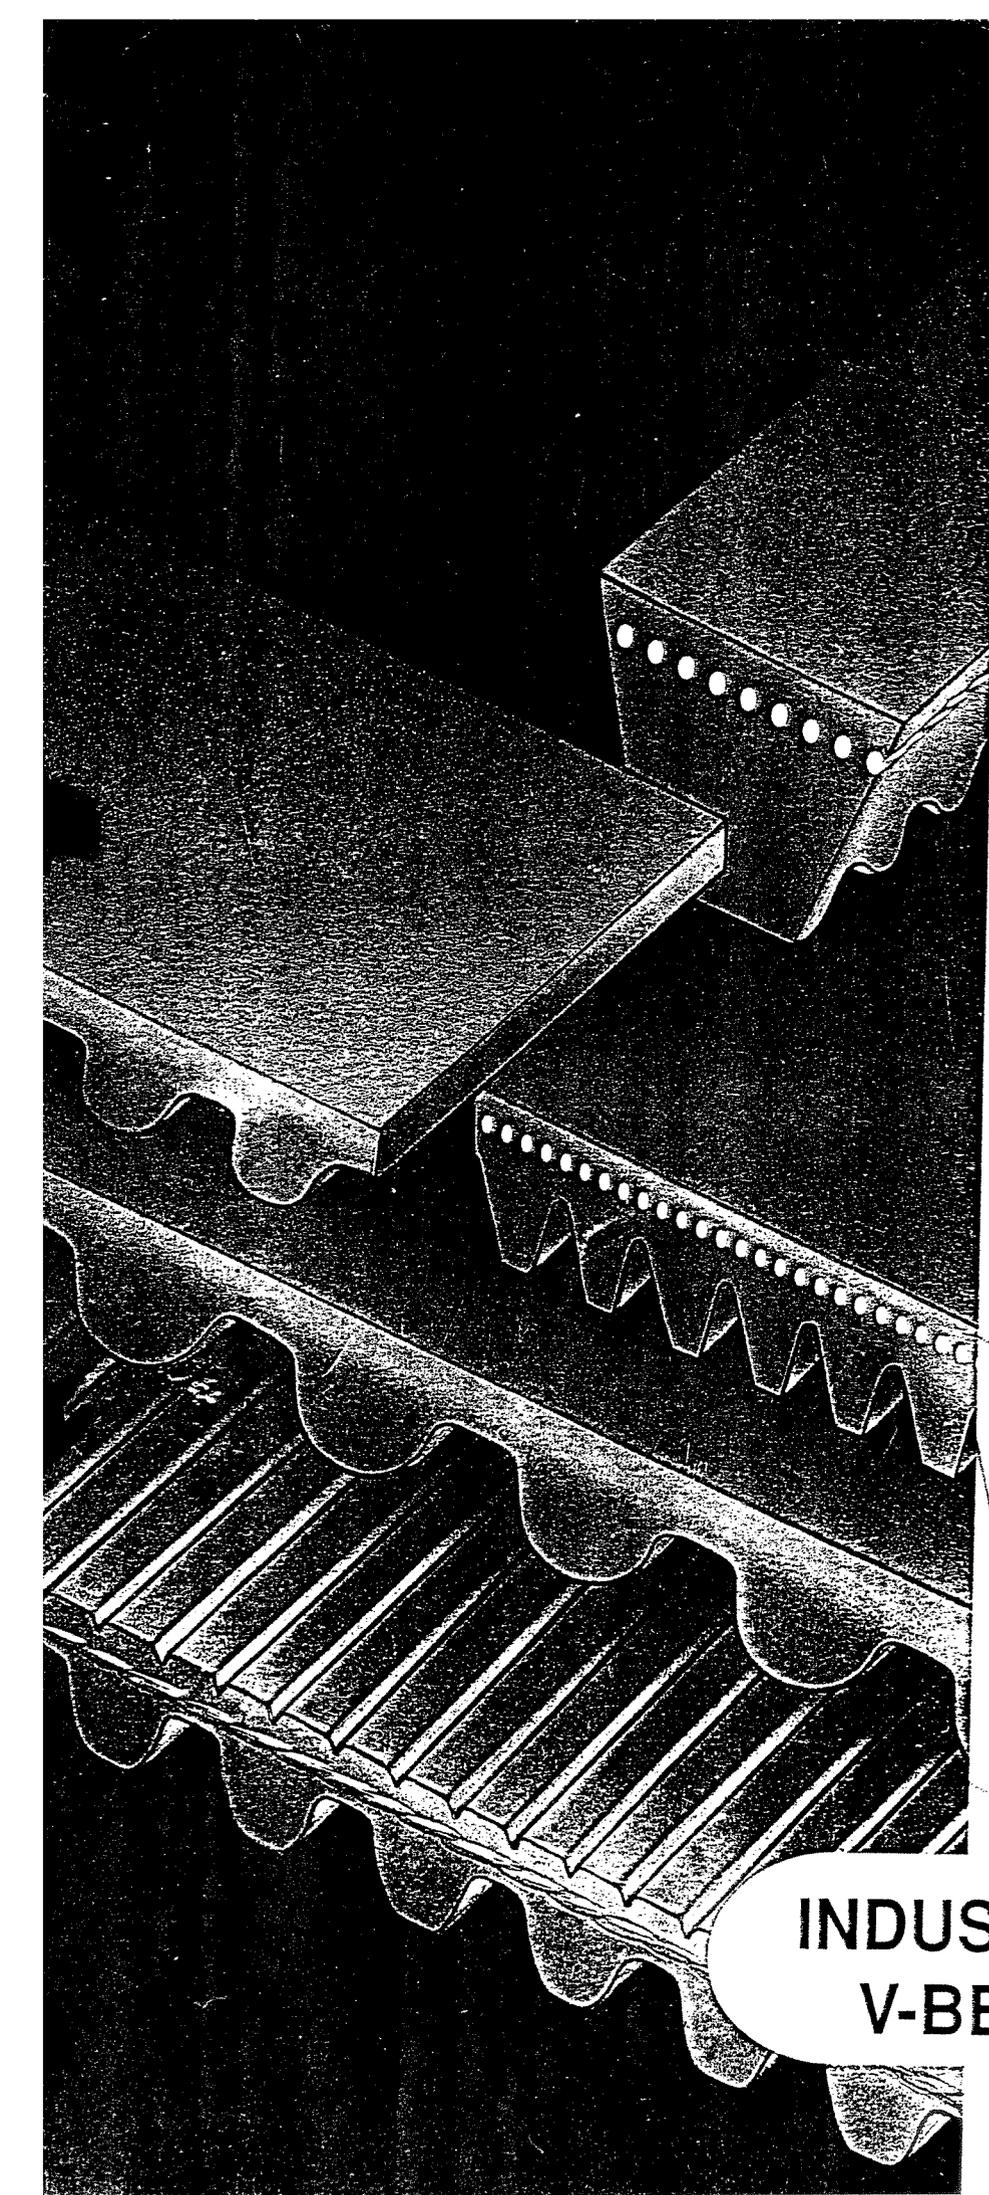

Design Manual

QUAD-POWER II
SUPER HC[®] MN
HI-POWER[®] MN
POWERBAND[®]
MICRO-V[®]
POLYFLEX[®] JB[™]

A detailed, high-contrast illustration of several industrial V-belts of different profiles, stacked and overlapping. The belts show various cross-sections, including some with multiple V-grooves and others with a single deep V-groove. The lighting creates strong highlights and deep shadows, emphasizing the texture and geometry of the belts.


**INDUSTRIAL
V-BELTS**

GATES INDUSTRIAL V-BELT DRIVE DESIGN MANUAL

This manual includes updated tables, specifications and procedures necessary to design drives using the following Gates industrial V-belts:

- **Quad-Power II** raw edge, moulded notch, narrow section V-belt;
- **Super HC[®] MN** raw edge, moulded notch, narrow section V-belt;
- **Super HC[®]** wrapped, narrow section V-belt;
- **Hi-Power[®] MN** raw edge, moulded notch V-belt of conventional cross-section;
- **Hi-Power[®]** wrapped V-belt of conventional cross-section;
- **PowerBand[®]** multiple V-belt;
- **Micro-V[®]** multi-ribbed belt;
- **Polyflex[®] JB[™]** polyurethane multiple V-belt.

Special recommendations for the use of idlers are also included.


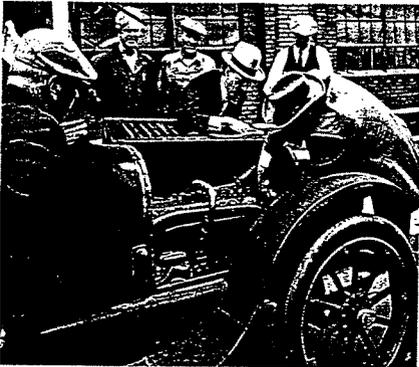


Throughout the years, the Gates Rubber Company has played a key role in the creation and development of high-quality belts.

It all started back in 1917, when John Gates invented the V-belt, now essential to most industrial power transmission applications. Through an ongoing programme of development of new belt products and improvement of existing belts in anticipation of industry's requirements, the Gates Power Transmission Division offers a complete range of premium products. Typical examples are V-belts such as Quad-Power II, Super HC[®] MN, Hi-Power[®] MN, PowerBand[®], Micro-V[®] and Polyflex[®] JB[™] and synchronous belts such as PowerGrip[®] GT, Poly Chain[®] GT and Long Length.


Gates continues investing in quality, research and development to assist you with whatever industrial drive design challenge you may be confronted with.

The ISO 9001 registration obtained for all European power transmission operations is evidence of the company's commitment to quality.

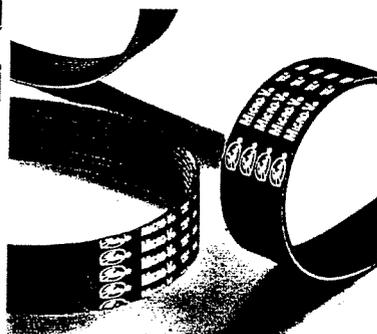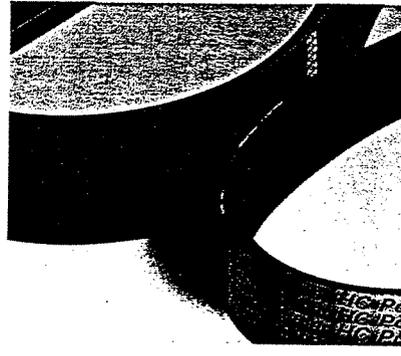

Registered trademark of The Gates Rubber Company.

Important!
According to the ISO 4184: 1992 standard all V-belts are now identified by datum length instead of pitch length.
Please consult page 23.

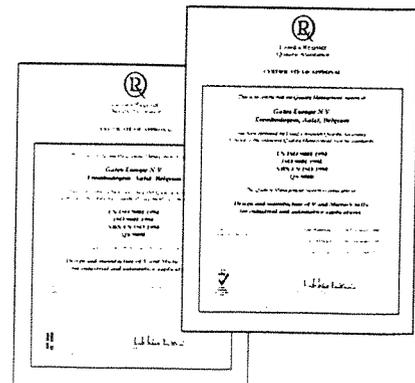


GATES INDUSTRIAL V-BELT DRIVE DESIGN MANUAL

CONTENTS

	PAGE	SECTION
PRODUCT FEATURES AND PROGRAMME		1
Quad-Power II	4	
Super HC [®] MN / Super HC [®]	5	
Hi-Power [®] MN / Hi-Power [®]	6	
PowerBand [®]	7	
Micro-V [®]	8	
Polyflex [®] JB [™]	9	
SIZE LISTINGS		2
Quad-Power II	10	
Super HC [®] MN / Super HC [®]	12	
Hi-Power [®] MN / Hi-Power [®]	14	
PowerBand [®]	19	
Micro-V [®]	20	
Polyflex [®] JB [™]	22	
DRIVE DESIGN		3
1. Select the desired service life range	23	
2. Find the design power	25	
3. Select the proper V-belt section	25	
4. Find the speed ratio	30	
5. Choose the pulley datum diameter	30	
6. Calculate the belt speed	30	
7. Select centre distance and V-belt length	31	
8. Find the number of belts or ribs required	33	
9. Provide the minimum installation and takeup allowances	33	
TENSIONING		4
1. V-belt tensioning method	35	
2. PowerBand [®] tensioning method	37	
PULLEYS		5
1. Groove specifications V-belt pulleys	40	
2. Groove specifications Micro-V [®] belt pulleys	42	
3. Groove specifications Polyflex [®] JB [™] belt pulleys	43	
IDLERS		5
POWER RATING TABLES		6
Quad-Power II	48	
Super HC [®] MN / Super HC [®]	56	
Hi-Power [®] MN / Hi-Power [®]	68	
Micro-V [®]	78	
Polyflex [®] JB [™]	84	
DRIVE DESIGN EXAMPLE		7
USEFUL DATA		7
PRODUCT APPLICATION SUPPORT		7
GATES LITERATURE		7
ADDRESSES		7

QUAD-POWER II

Raw edge, moulded notch, narrow section V-belt

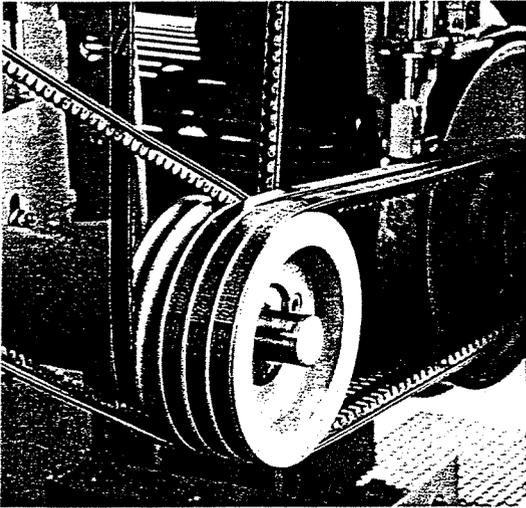

Quad-Power II is Gates' new top-of-the-range narrow section V-belt for heavy-duty industrial drives. It has been developed to replace traditional V-belts on applications where space and weight savings are critical: Quad-Power II is the V-belt with the highest power capacity even on small pulley diameters.


Improved resistance to outside bends allows the use of back idlers. The new optimised notch profile makes the belts run smoothly in the pulley grooves.

Identification

Durable blue marking indicating type and dimensions.

Construction

- * Raw edge construction, ground.
- * Narrow cross-section.
- * New, optimised notch profile reduces and evenly distributes thermal and bending stresses. Notch depth is in proportion to the cross-section to ensure perfect stability.
- * Precision-ground sidewalls give a uniform wedging action.
- * Fibre-loaded polychloroprene compound withstands heat, ozone and sunlight.
- * Flex-bonded polyester tensile cords are vulcanised as one solid unit, increasing the belt's resistance to tensile and flexing forces.
- * Double Flex-Weave® textile backing protects the belt against wear — especially when back idlers are used.
- * Cross-cords improve belt stability.
- * The belt will not catch fire from heat buildup, even with severe slippage.
- * Static conductive (ISO 1813).

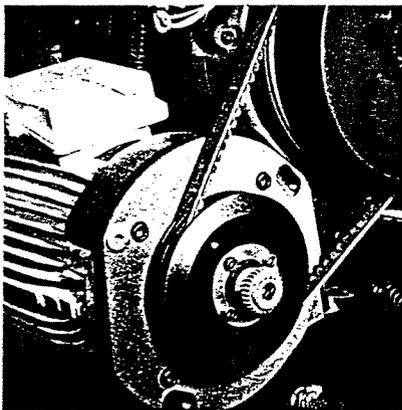


Advantages


- * The most powerful belt in Gates' industrial V-belt range.
- * Excellent performance / cost ratio.
- * Increased transmission efficiency as compared to other V-belt types.
- * Cost and space savings.
- * Maximum belt life reducing maintenance time.
- * Match system: all sizes meet Gates UNISSET tolerances.

Sections and nominal dimensions


	Width mm	Height mm
XPZ	10	8
XPA	13	10
XPB	16	13
XPC	22	18

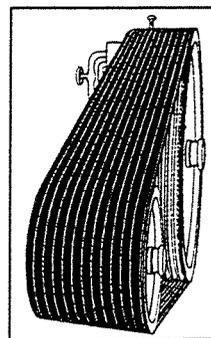

Hi-Power® MN
12 x B MN 46
pulley width: 234 mm
25 000 hr belt life

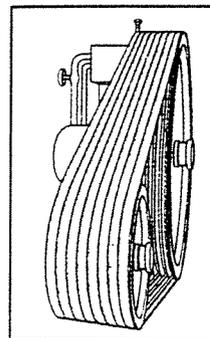


Super HC® MN
8 x SPB MN 1250
pulley width: 158 mm
25 000 hr belt life

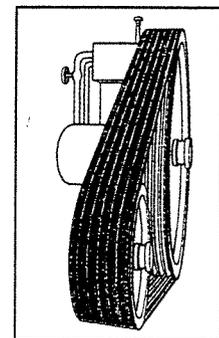

Quad-Power II
6 x XPB 1250
pulley width: 120 mm
25 000 hr belt life

SUPER HC[®] MN *Raw edge, moulded notch, narrow section V-belt*

SUPER HC[®] *Wrapped, narrow section V-belt*

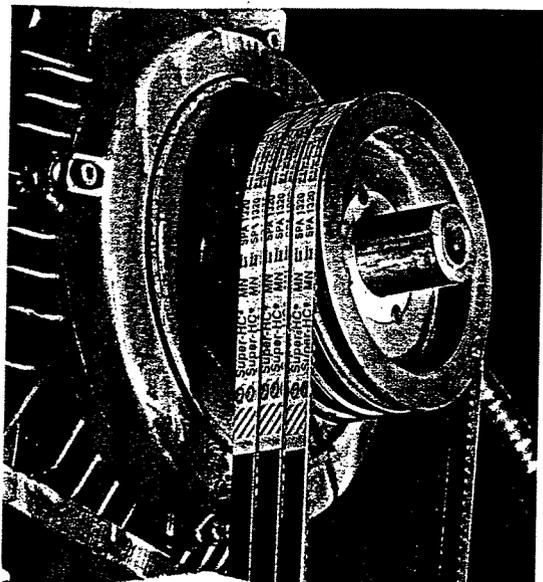

Next to the Super HC[®] wrapped, narrow section V-belt, Gates markets the new Super HC[®] Moulded Notch V-belt construction. Super HC[®] MN V-belts put more power where high speeds, high speed ratios or small pulley diameters are required, thus offering significant advantages over classical section V-belts.



Developed through specialised research, Super HC[®] MN is highly recommended for use on all industrial heavy-duty, narrow section V-belt drives. The Super HC[®] MN increased transmission efficiency allows more compact and highly economical drive design.

Identification

Durable yellow marking indicating type and dimensions.

Construction

- * Raw edge construction, ground.
- * Narrow cross-section.
- * Moulded notches reduce and evenly distribute thermal and bending stresses. The moulded notch pattern also reduces noise.
- * Precision-ground straight sidewalls give a uniform wedging action and ensure the belt fits correctly in the pulley grooves.
- * Allows use of back idlers.
- * Flex-bonded tensile cords are vulcanised as one solid unit making the belt highly resistant to tensile and flexing forces, fatigue and shock loads.
- * Polychloroprene compound protects the belt against heat, ozone and sunlight.
- * The belt will not catch fire from heat buildup, even with severe slippage.
- * Static conductive (ISO 1813).

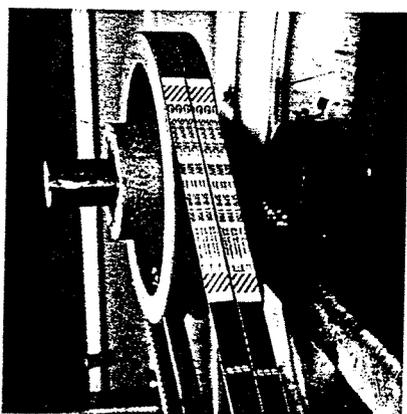


Advantages

- * Excellent performance / cost ratio.
- * More power in the same space or same power in 1/3 to 1/2 less space as compared to classical section V-belts.
- * Cost and space savings by reducing size of pulleys, bearings, guards and mounts.
- * Improved belt life reducing expensive maintenance time.
- * Match system: all sizes meet Gates UNISSET tolerances.

Sections and nominal dimensions

	Width mm	Height mm
SPZ	10	8
SPA	13	10
SPB	16	13
SPC	22	18

HI-POWER® MN *Raw edge, moulded notch V-belt of conventional cross-section*
HI-POWER® *Wrapped V-belt of conventional cross-section*

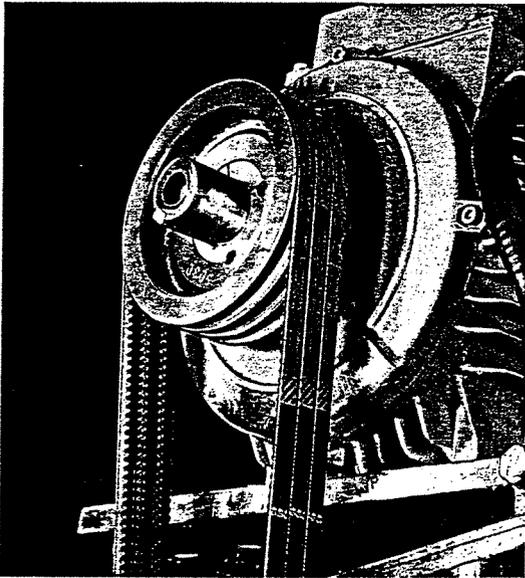

Next to the Hi-Power® wrapped V-belt of conventional cross-section, Gates markets the new Hi-Power® Moulded Notch V-belt construction. Gates' new Hi-Power® MN V-belt is built for excellent performance on heavy-duty Z, A, B and C section industrial drives. Technologically, it is a first-class product, combining a raw edge construction with classical section V-belt advantages.

The raw edge construction makes the Hi-Power® MN replacement belt especially suited for drives requiring small diameter pulleys and back idlers. The extensive size range covers numerous heavy-duty applications on industrial pumps, compressors, machine tools etc.

Identification


Durable red marking indicating type and dimensions.

Construction

- * Raw edge construction. Ground.
- * Classical cross-section.
- * Moulded notches reduce and evenly distribute thermal and

bending stresses and also lower noise levels.

- * Straight sidewalls give a uniform wedging action. Thanks to its precise dimensions, the belt correctly fits into the pulley grooves and makes even contact.
- * Flex-bonded tensile cords, vulcanised as one solid unit, provide better resistance to tensile and flexing forces, fatigue and shock loads.
- * High-quality rubber compound protects the belt against heat, ozone and sunlight.
- * The belt will not catch fire from heat buildup, even with severe slippage.
- * Static conductive (ISO 1813).

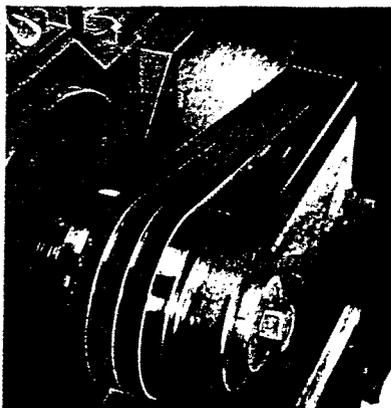

Advantages


- * Excellent performance / cost ratio.
- * Reliability and efficiency.
- * Long belt life reducing replacement and maintenance costs.
- * Match system: all sizes meet Gates UNISSET tolerances.

Sections and nominal dimensions

	Width mm	Height mm
Z	10	6
A	13	8
B	17	10
C	22	12
D	32	19

POWERBAND®

Multiple V-belt

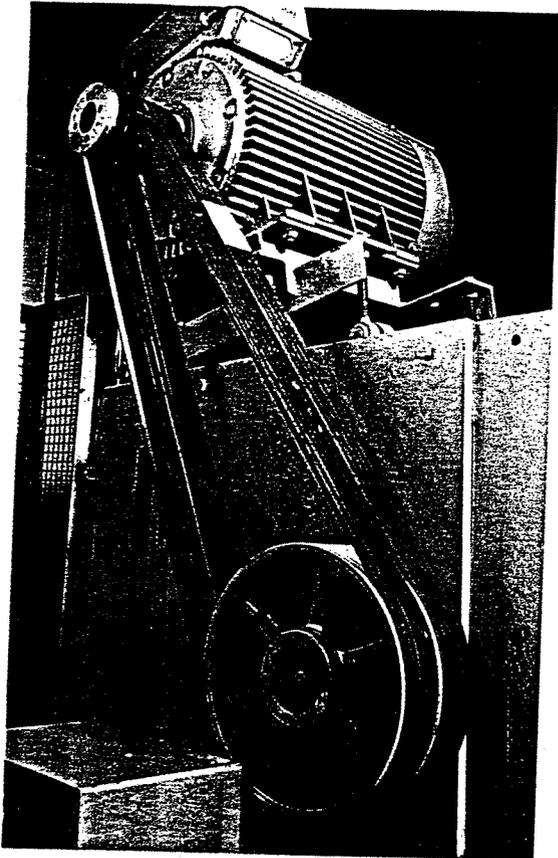

Gates PowerBand® offers a solution for drives where single belts vibrate, turn over or jump off the pulleys.


PowerBand® is especially developed for drives subjected to pulsating loads. It consists of several V-belts joined together by a permanent, high strength tie band, thus being tougher than all the belts taken separately. PowerBand® is available in SPB, SPC, 8V/25J, 9J, 15J, 3VX and 5VX sections.

Identification

Durable marking indicating type and dimensions.

Construction

- * Strong band controls belt-to-belt distance and prevents sideways bending.
- * Flex-bonded cords.
- * Concave sides, arched top and Flex-Weave® cover for PowerBands of wrapped construction (SPB, SPC, 9J, 15J and 8V/25J).
- * Hi-Power® PowerBand® B, C and D sections are available on request.
- * Moulded notches for PowerBands of raw edge construction (3VX and 5VX).
- * Polychloroprene compound.
- * The belt will not catch fire from heat buildup, even with severe slippage.
- * Static conductive (ISO 1813).

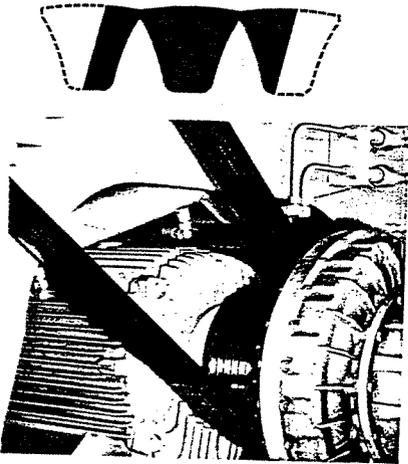

Advantages


- * High stability and smooth running on the toughest drives.
- * Important design economies possible.
- * Savings in drive space and weight thanks to high transmission efficiency.

Sections and nominal dimensions

	Width mm	Height mm
SPB	16	13
SPC	22	18
9J	10	8
15J	16	13
8V / 25J	26	23
3VX	10	8
5VX	16	13

MICRO-V®

Multi-ribbed belt

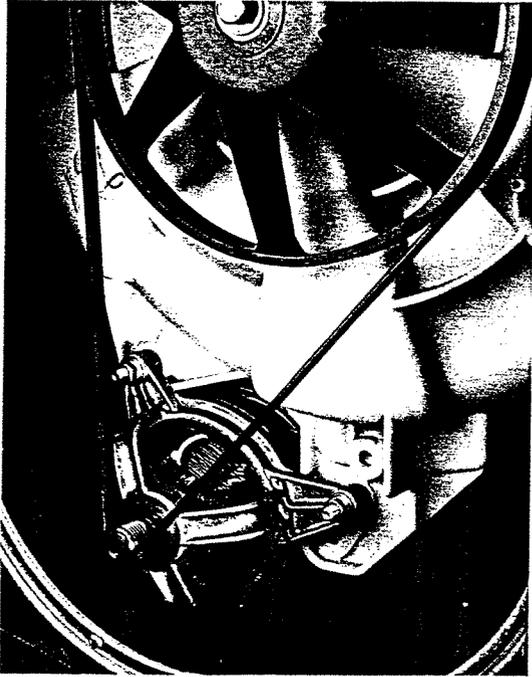

Due to its truncated rib design, Gates Micro-V® multi-ribbed belt ensures an outstanding performance at higher speeds on smaller diameter pulleys.

This long-lasting belt provides a power capacity increase up to 80% higher than RMA standards while still guaranteeing smooth running.

Identification

Durable yellow marking indicating type and dimension.

Construction

- * Truncated ribs ensure flexibility, reduce heat buildup and improve rib crack resistance.
- * High modulus, low stretch polyester tensile member provides superior resistance to fatigue and shock loads.
- * All polychloroprene rubber compound provides oil and heat resistance.
- * Static conductive undercord (ISO 1813) ensures safe operation.
- * Specially formulated fibre reinforced undercord stock improves belt stability.
- * Woven fabric rib surface ensures better wear resistance, quiet running and provides a clutching surface ("PL" and "PM" section).




Advantages

- * Extremely smooth running.
- * Very high power capacity per rib.
- * Long life thanks to extra load-carrying capacity.
- * Improved performance on back idlers.
- * Smaller drive package.

Sections and nominal dimensions


Micro-V® belts are available in PJ, PL and PM cross-sections. The figure below shows a cross-sectional view illustrating the nominal belt dimensions — rib width and belt height. All these belts will operate in standard pulleys provided the pulleys are manufactured to the DIN 7867 or ISO 9982 standard for the specific cross-section.

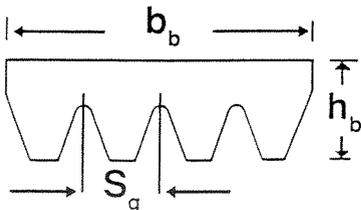

Nominal top width: $b_b = N_r \times S_g$
 Where: N_r = number of ribs
 S_g = pulley groove spacing

	Pitch S_g mm	Height h_b mm
PJ	2.34	3.6
PL	4.70	6.4
PM	9.40	12.5

Polyurethane multiple V-belt

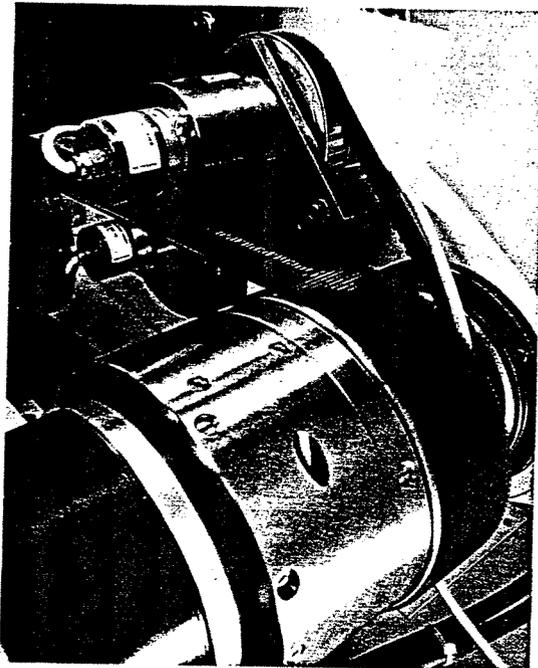

Polyflex® JB™ is synonymous with high power density in small spaces. Developed by Gates and produced according to patented manufacturing processes, Polyflex® JB™ belts provide more load-carrying capacity at higher speeds to small precision multiple V-belt drives. This results in significant cost savings and improved design freedom. Recommended for use on bench type milling machines, lathe drives, woodworking and metalworking machine spindle drives, computer peripheral equipment, small blowers, etc.

Identification

Tag attached to the belt indicating type.

Construction

- * Joined belt construction improves stability.
 - * Ribs relieve bending stress on small pulleys and provide lateral rigidity.
 - * 60° angle provides more undercord support to the tensile section and distributes the load more evenly.
 - * Small cross-section meets special application needs such as high shaft speeds, small drive package size and smooth running requirements.
- * High modulus polyurethane compound with a high friction coefficient. The precise casting method eliminates overlaps and layers.
 - * Excellent adhesion of tensile cords and polyurethane compound leads to high fatigue resistance and long belt life.
 - * Extra toughness. The polyurethane compound resists fatigue, wear and ozone.



Advantages

- * Long belt life on small pulleys and compact drives.
- * Greater speed ratios at smaller cost.
- * Greater shaft speeds, in excess of 10000 rpm.
- * Smooth running for precision applications.
- * Cost savings and design freedom.

Sections and nominal dimensions

	Width mm	Height mm
5M-JB	5	3.3
7M-JB	7	5.3
11M-JB	11	7.1

QUAD-POWER II SIZE LISTING

XPZ

XPA

Belt reference	Datum length						
ISO	mm ISO						
XPZ 630	630	XPZ 1180	1180	XPZ 2650	2650	XPA 747	747
XPZ 637	637	XPZ 1187	1187	XPZ 2690	2690	XPA 757	757
XPZ 662	662	XPZ 1200	1200	XPZ 2800	2800	XPA 782	782
XPZ 670	670	XPZ 1202	1202	XPZ 2840	2840	XPA 800	800
XPZ 687	687	XPZ 1212	1212	XPZ 3000	3000	XPA 832	832
XPZ 710	710	XPZ 1237	1237	XPZ 3150	3150	XPA 850	850
XPZ 722	722	XPZ 1250	1250	XPZ 3350	3350	XPA 857	857
XPZ 730	730	XPZ 1262	1262	XPZ 3550	3550	XPA 882	882
XPZ 737	737	XPZ 1270	1270			XPA 900	900
XPZ 750	750	XPZ 1280	1280			XPA 907	907
XPZ 760	760	XPZ 1285	1285			XPA 925	925
XPZ 762	762	XPZ 1287	1287			XPA 932	932
XPZ 772	772	XPZ 1312	1312			XPA 950	950
XPZ 787	787	XPZ 1320	1320			XPA 957	957
XPZ 800	800	XPZ 1337	1337			XPA 975	975
XPZ 812	812	XPZ 1340	1340			XPA 982	982
XPZ 837	837	XPZ 1362	1362			XPA 1000	1000
XPZ 850	850	XPZ 1400	1400			XPA 1007	1007
XPZ 862	862	XPZ 1412	1412			XPA 1030	1030
XPZ 875	875	XPZ 1420	1420			XPA 1060	1060
XPZ 887	887	XPZ 1450	1450			XPA 1082	1082
XPZ 900	900	XPZ 1487	1487			XPA 1090	1090
XPZ 912	912	XPZ 1500	1500			XPA 1107	1107
XPZ 925	925	XPZ 1512	1512			XPA 1120	1120
XPZ 937	937	XPZ 1520	1520			XPA 1140	1140
XPZ 950	950	XPZ 1537	1537			XPA 1150	1150
XPZ 962	962	XPZ 1550	1550			XPA 1157	1157
XPZ 975	975	XPZ 1587	1587			XPA 1180	1180
XPZ 980	980	XPZ 1600	1600			XPA 1207	1207
XPZ 987	987	XPZ 1650	1650			XPA 1215	1215
XPZ 1000	1000	XPZ 1687	1687			XPA 1232	1232
XPZ 1010	1010	XPZ 1700	1700			XPA 1250	1250
XPZ 1012	1012	XPZ 1750	1750			XPA 1257	1257
XPZ 1030	1030	XPZ 1800	1800			XPA 1282	1282
XPZ 1037	1037	XPZ 1850*	1850			XPA 1285	1285
XPZ 1060	1060	XPZ 1900	1900			XPA 1307	1307
XPZ 1062	1062	XPZ 1950	1950			XPA 1320	1320
XPZ 1077	1077	XPZ 2000	2000			XPA 1332	1332
XPZ 1080	1080	XPZ 2030	2030			XPA 1357	1357
XPZ 1087	1087	XPZ 2120	2120			XPA 1360	1360
XPZ 1090	1090	XPZ 2160	2160			XPA 1400	1400
XPZ 1112	1112	XPZ 2240	2240			XPA 1450	1450
XPZ 1120	1120	XPZ 2280	2280			XPA 1482	1482
XPZ 1137	1137	XPZ 2360	2360			XPA 1500	1500
XPZ 1140	1140	XPZ 2410	2410			XPA 1507	1507
XPZ 1150	1150	XPZ 2500	2500			XPA 1532	1532
XPZ 1162	1162	XPZ 2540	2540			XPA 1550	1550

Dimensions in bold are available from stock.

QUAD-POWER II SIZE LISTING

Belt reference	XPB		XPC		
	Datum length	Belt reference	Datum length	Belt reference	Datum length
ISO	mm ISO	ISO	mm ISO	ISO	mm ISO
XPA 1582	1582	XPB 1250	1250	XPC 2000*	2000
XPA 1600	1600	XPB 1260	1260	XPC 2120*	2120
XPA 1650	1650	XPB 1320	1320	XPC 2240*	2240
XPA 1700	1700	XPB 1340	1340	XPC 2360*	2360
XPA 1750	1750	XPB 1400	1400	XPC 2500*	2500
XPA 1800	1800	XPB 1410	1410	XPC 2650*	2650
XPA 1850	1850	XPB 1450*	1450	XPC 2800*	2800
XPA 1900	1900	XPB 1500	1500	XPC 3000*	3000
XPA 1950	1950	XPB 1510	1510	XPC 3150*	3150
XPA 2000	2000	XPB 1550*	1550	XPC 3350*	3350
XPA 2060	2060	XPB 1590	1590	XPC 3550*	3550
XPA 2120	2120	XPB 1600	1600	XPC 3750*	3750
XPA 2240	2240	XPB 1650*	1650	XPC 4000*	4000
XPA 2360	2360	XPB 1690	1690	XPC 4250*	4250
XPA 2430	2430	XPB 1700	1700	XPC 4500*	4500
XPA 2500	2500	XPB 1750*	1750	XPC 4750*	4750
XPA 2650	2650	XPB 1800	1800		
XPA 2800	2800	XPB 1850*	1850		
XPA 3000	3000	XPB 1900	1900		
XPA 3150	3150	XPB 1950*	1950		
XPA 3350	3350	XPB 2000	2000		
XPA 3550	3550	XPB 2020	2020		
XPA 3750*	3750	XPB 2120	2120		
XPA 4000*	4000	XPB 2150	2150		
		XPB 2240	2240		
		XPB 2280	2280		
		XPB 2360	2360		
		XPB 2410	2410		
		XPB 2500	2500		
		XPB 2530	2530		
		XPB 2650	2650		
		XPB 2680	2680		
		XPB 2800	2800		
		XPB 2840	2840		
		XPB 2990	2990		
		XPB 3000	3000		
		XPB 3150	3150		
		XPB 3350	3350		
		XPB 3550	3550		
		XPB 3750*	3750		
		XPB 4000*	4000		
		XPB 4250*	4250		
		XPB 4500*	4500		
		XPB 4750*	4750		

* New Quad-Power II sizes.

Dimensions in bold are available from stock.

2

SUPER HC[®] MN / SUPER HC[®] BELT LISTING

SPZ						SPA					
ISO belt ref.		Datum									
MN	Wrapped	length									
		mm ISO									
SPZ 560	SPZ 560	560	SPZ 1090	SPZ 1090	1090	SPZ 1700	SPZ 1700	1700	SPA 732	SPA 732	732
SPZ 562	SPZ 562	562	SPZ 1112	SPZ 1112	1112	SPZ 1737		1737	SPA 757		757
SPZ 612	SPZ 612	612	SPZ 1120	SPZ 1120	1120	SPZ 1750	SPZ 1750	1750	SPA 782		782
	SPZ 615	615	SPZ 1137	SPZ 1137	1137	SPZ 1762		1762	SPA 800	SPA 800	800
SPZ 630	SPZ 630	630	SPZ 1140		1140	SPZ 1782		1782	SPA 807		807
SPZ 637	SPZ 637	637	SPZ 1150	SPZ 1150	1150	SPZ 1787	SPZ 1787	1787	SPA 832	SPA 832	832
SPZ 662	SPZ 662	662	SPZ 1162	SPZ 1162	1162	SPZ 1800	SPZ 1800	1800	SPA 850	SPA 850	850
SPZ 670	SPZ 670	670	SPZ 1180	SPZ 1180	1180	SPZ 1812		1812	SPA 857	SPA 857	857
SPZ 687	SPZ 687	687	SPZ 1187	SPZ 1187	1187	SPZ 1837	SPZ 1837	1837	SPA 882	SPA 882	882
SPZ 710	SPZ 710	710	SPZ 1200		1200	SPZ 1850	SPZ 1850	1850	SPA 900	SPA 900	900
SPZ 722		722	SPZ 1202		1202	SPZ 1862		1862	SPA 907	SPA 907	907
SPZ 730	SPZ 730	730	SPZ 1212	SPZ 1212	1212	SPZ 1887		1887	SPA 925	SPA 925	925
SPZ 737	SPZ 737	737		SPZ 1215	1215	SPZ 1900	SPZ 1900	1900	SPA 932	SPA 932	932
SPZ 750	SPZ 750	750	SPZ 1237	SPZ 1237	1237	SPZ 1937		1937	SPA 950	SPA 950	950
SPZ 760		760	SPZ 1250	SPZ 1250	1250	SPZ 1950	SPZ 1950	1950	SPA 957	SPA 957	957
SPZ 762	SPZ 762	762	SPZ 1262	SPZ 1262	1262	SPZ 1987		1987	SPA 975	SPA 975	975
SPZ 772		772	SPZ 1270		1270	SPZ 2000	SPZ 2000	2000	SPA 982	SPA 982	982
SPZ 775	SPZ 775	775		SPZ 1285	1285	SPZ 2037		2037	SPA 1000	SPA 1000	1000
SPZ 787	SPZ 787	787	SPZ 1287	SPZ 1287	1287	SPZ 2060	SPZ 2060	2060	SPA 1007	SPA 1007	1007
SPZ 800	SPZ 800	800	SPZ 1312	SPZ 1312	1312	SPZ 2120	SPZ 2120	2120	SPA 1030	SPA 1030	1030
SPZ 812	SPZ 812	812	SPZ 1320	SPZ 1320	1320	SPZ 2137		2137	SPA 1032	SPA 1032	1032
SPZ 825	SPZ 825	825	SPZ 1337	SPZ 1337	1337	SPZ 2160		2160		SPA 1057	1057
SPZ 837	SPZ 837	837	SPZ 1340		1340	SPZ 2180	SPZ 2180	2180	SPA 1060	SPA 1060	1060
SPZ 850	SPZ 850	850	SPZ 1347		1347	SPZ 2187		2187	SPA 1082	SPA 1082	1082
SPZ 862	SPZ 862	862		SPZ 1360	1360	SPZ 2240	SPZ 2240	2240	SPA 1090	SPA 1090	1090
SPZ 875	SPZ 875	875	SPZ 1362	SPZ 1362	1362	SPZ 2262		2262	SPA 1107	SPA 1107	1107
SPZ 887	SPZ 887	887	SPZ 1387	SPZ 1387	1387	SPZ 2280		2280	SPA 1120	SPA 1120	1120
SPZ 900	SPZ 900	900	SPZ 1400	SPZ 1400	1400	SPZ 2287		2287	SPA 1132	SPA 1132	1132
SPZ 912	SPZ 912	912	SPZ 1412		1412	SPZ 2360	SPZ 2360	2360	SPA 1140		1140
SPZ 925	SPZ 925	925	SPZ 1420		1420	SPZ 2410		2410	SPA 1150	SPA 1150	1150
SPZ 937	SPZ 937	937	SPZ 1437	SPZ 1437	1437	SPZ 2430	SPZ 2430	2430	SPA 1157	SPA 1157	1157
SPZ 950	SPZ 950	950	SPZ 1450	SPZ 1450	1450	SPZ 2500	SPZ 2500	2500	SPA 1180	SPA 1180	1180
SPZ 962	SPZ 962	962	SPZ 1462	SPZ 1462	1462	SPZ 2540		2540	SPA 1207	SPA 1207	1207
SPZ 975	SPZ 975	975	SPZ 1487	SPZ 1487	1487	SPZ 2650	SPZ 2650	2650	SPA 1215	SPA 1215	1215
SPZ 987	SPZ 987	987	SPZ 1500	SPZ 1500	1500	SPZ 2690		2690	SPA 1232	SPA 1232	1232
SPZ 1000	SPZ 1000	1000	SPZ 1512		1512	SPZ 2800	SPZ 2800	2800	SPA 1250	SPA 1250	1250
SPZ 1010		1010	SPZ 1520		1520	SPZ 2840		2840	SPA 1257	SPA 1257	1257
SPZ 1012	SPZ 1012	1012	SPZ 1537		1537	SPZ 3000	SPZ 3000	3000	SPA 1272		1272
SPZ 1025		1025	SPZ 1550	SPZ 1550	1550		SPZ 3150	3150	SPA 1282	SPA 1282	1282
SPZ 1030	SPZ 1030	1030	SPZ 1562		1562		SPZ 3350	3350	SPA 1285	SPA 1285	1285
SPZ 1037	SPZ 1037	1037	SPZ 1587	SPZ 1587	1587		SPZ 3550	3550	SPA 1307	SPA 1307	1307
SPZ 1047		1047	SPZ 1600	SPZ 1600	1600				SPA 1320	SPA 1320	1320
SPZ 1060	SPZ 1060	1060	SPZ 1612	SPZ 1612	1612				SPA 1332	SPA 1332	1332
SPZ 1062	SPZ 1062	1062	SPZ 1637	SPZ 1637	1637				SPA 1357	SPA 1357	1357
SPZ 1077		1077	SPZ 1650	SPZ 1650	1650				SPA 1360	SPA 1360	1360
SPZ 1080		1080	SPZ 1662		1662				SPA 1382	SPA 1382	1382
SPZ 1087	SPZ 1087	1087	SPZ 1687		1687				SPA 1400	SPA 1400	1400

Dimensions in bold are available from stock.

SUPER HC[®] MN / SUPER HC[®] BELT LISTING

ISO belt ref.			ISO belt ref.			SPB			SPC		
MN	Wrapped	Datum length	MN	Wrapped	Datum length	MN	Wrapped	Datum length	MN	Wrapped	Datum length
		mm ISO			mm ISO			mm ISO			mm ISO
SPA 1407	SPA 1407	1407	SPA 2307		2307	SPB 1250	SPB 1250	1250	SPC 2000	SPC 2000	2000
SPA 1432	SPA 1432	1432	SPA 2332		2332	SPB 1260		1260	SPC 2120	SPC 2120	2120
SPA 1450	SPA 1450	1450	SPA 2360	SPA 2360	2360	SPB 1320		1320	SPC 2240	SPC 2240	2240
SPA 1457	SPA 1457	1457	SPA 2382		2382	SPB 1340		1340	SPC 2360	SPC 2360	2360
SPA 1482	SPA 1482	1482	SPA 2430	SPA 2430	2430	SPB 1400		1400	SPC 2500	SPC 2500	2500
SPA 1500	SPA 1500	1500	SPA 2482		2482	SPB 1410		1410	SPC 2650	SPC 2650	2650
SPA 1507	SPA 1507	1507	SPA 2500	SPA 2500	2500	SPB 1500	SPB 1500	1500	SPC 2800	SPC 2800	2800
SPA 1532	SPA 1532	1532	SPA 2532		2532	SPB 1510		1510	SPC 3000	SPC 3000	3000
SPA 1550	SPA 1550	1550	SPA 2582		2582	SPB 1590		1590	SPC 3150		3150
SPA 1557	SPA 1557	1557	SPA 2607		2607	SPB 1600	SPB 1600	1600	SPC 3350		3350
SPA 1582		1582	SPA 2632		2632	SPB 1690		1690	SPC 3550		3550
SPA 1600	SPA 1600	1600	SPA 2650	SPA 2650	2650	SPB 1700	SPB 1700	1700	SPC 3750		3750
SPA 1607		1607	SPA 2682		2682	SPB 1800	SPB 1800	1800	SPC 4000		4000
SPA 1632		1632	SPA 2732		2732	SPB 1900	SPB 1900	1900	SPC 4250		4250
SPA 1650	SPA 1650	1650	SPA 2782		2782	SPB 2000	SPB 2000	2000	SPC 4500		4500
SPA 1657		1657	SPA 2800	SPA 2800	2800	SPB 2020		2020	SPC 4750		4750
SPA 1682		1682	SPA 2832		2832	SPB 2120	SPB 2120	2120	SPC 5000		5000
SPA 1700	SPA 1700	1700	SPA 2847		2847	SPB 2150		2150	SPC 5300		5300
SPA 1707		1707	SPA 2882		2882	SPB 2240	SPB 2240	2240	SPC 5600		5600
SPA 1732	SPA 1732	1732	SPA 2900	SPA 2900	2900	SPB 2280		2280	SPC 6000		6000
SPA 1750	SPA 1750	1750	SPA 2932		2932	SPB 2360	SPB 2360	2360	SPC 6300		6300
SPA 1757		1757	SPA 2982		2982	SPB 2410		2410	SPC 6700		6700
SPA 1782	SPA 1782	1782		SPA 3000	3000	SPB 2500	SPB 2500	2500	SPC 7100		7100
SPA 1800	SPA 1800	1800		SPA 3150	3150	SPB 2530		2530	SPC 7500		7500
SPA 1807		1807		SPA 3350	3350	SPB 2650	SPB 2650	2650	SPC 8000		8000
SPA 1832	SPA 1832	1832		SPA 3550	3550	SPB 2680		2680	SPC 8500		8500
SPA 1857	SPA 1857	1857		SPA 3750	3750	SPB 2800	SPB 2800	2800	SPC 9000		9000
SPA 1882		1882		SPA 4000	4000	SPB 2840		2840	SPC 9500		9500
SPA 1900	SPA 1900	1900		SPA 4250	4250	SPB 2990		2990			
SPA 1907		1907		SPA 4500	4500	SPB 3000	SPB 3000	3000			
SPA 1932	SPA 1932	1932					SPB 3150	3150			
SPA 1950	SPA 1950	1950					SPB 3350	3350			
SPA 1957		1957					SPB 3550	3550			
SPA 1982		1982					SPB 3750	3750			
SPA 2000	SPA 2000	2000					SPB 4000	4000			
SPA 2032	SPA 2032	2032					SPB 4250	4250			
SPA 2057		2057					SPB 4500	4500			
SPA 2060	SPA 2060	2060					SPB 4750	4750			
SPA 2082	SPA 2082	2082					SPB 5000	5000			
SPA 2120	SPA 2120	2120					SPB 5300	5300			
SPA 2132	SPA 2132	2132					SPB 5600	5600			
SPA 2182		2182					SPB 6000	6000			
SPA 2207	SPA 2207	2207					SPB 6300	6300			
SPA 2232		2232					SPB 6700	6700			
SPA 2240	SPA 2240	2240					SPB 7100	7100			
SPA 2282		2282					SPB 7500	7500			
SPA 2300	SPA 2300	2300					SPB 8000	8000			

Dimensions in bold are available from stock.



HI-POWER® MN / HI-POWER® SIZE LISTING

Z				A							
10 mm		13 mm		10 mm		13 mm					
ISO belt ref.	Datum	ISO belt ref.	Datum	ISO belt ref.	Datum	ISO belt ref.	Datum				
MN	Wrapped length	MN	Wrapped length	MN	Wrapped length	MN	Wrapped length				
	mm ISO		mm ISO		mm ISO		mm ISO				
	Z-17 ^{1/2}	470	Z-47 ^{1/2}	1235	A-20 ^{3/4}	565	A-40 ^{1/2}	1070			
	Z-18 ^{1/2}	495	Z-48	Z-48	1245	A-21	A-21	570	A-41	A-41	1080
	Z-19	505	Z-48 ^{1/2}	Z-48 ^{1/2}	1255	A-21 ^{3/4}	590	A-41 ^{1/2}	A-41 ^{1/2}	1090	
	Z-19 ^{1/2}	520	Z-49	Z-49	1270	A-22	A-22	595	A-42	A-42	1105
Z-20 ^{1/2}	Z-20 ^{1/2}	550	Z-50	Z-50	1295	A-22 ^{1/2}	605	A-43	A-43	1130	
Z-21		565	Z-51*	Z-51	1320	A-23	A-23	620	A-43 ^{1/4}	1135	
Z-22	Z-22	580	Z-52*	Z-52	1340	A-23 ^{1/2}	A-23 ^{1/2}	630	A-43 ^{3/4}	1150	
Z-22 ^{1/2}	Z-22 ^{1/2}	595	Z-52 ^{1/2} *	1360	A-23 ^{3/4}	640	A-44	A-44	1155		
Z-23 ^{1/2}	Z-23 ^{1/2}	620	Z-53*	1370	A-24	A-24	645	A-44 ^{3/4}	1175		
Z-24	Z-24	630	Z-54*	1395	A-24 ^{1/2}	A-24 ^{1/2}	655	A-45	A-45	1180	
Z-25	Z-25	655	Z-55*	Z-55	1420	A-25	A-25	680	A-45 ^{3/4}	1200	
Z-25 ^{1/2}		670	Z-56*	1445	A-26	A-26	705	A-46	A-46	1205	
Z-26 ^{1/2}	Z-26 ^{1/2}	695	Z-57*	Z-57	1470	A-26 ^{1/2}	715	A-46 ^{1/4}	1210		
Z-27 ^{1/2}		720	Z-58*	1495	A-27	A-27	720	A-47	A-47	1230	
Z-28	Z-28	730	Z-59*	Z-59	1520	A-27 ^{1/2}	A-27 ^{1/2}	730	A-47 ^{1/2}	1245	
Z-28 ^{1/2}		745	Z-60*	1545	A-28	A-28	745	A-47 ^{3/4}	1250		
Z-29	Z-29	755	Z-60 ^{1/2} *	1555	A-28 ^{1/2}	A-28 ^{1/2}	755	A-48	A-48	1255	
Z-29 ^{1/2}	Z-29 ^{1/2}	770	Z-61*	1570	A-28 ^{3/4}	760	A-48 ^{1/2}	1270			
Z-30		785	Z-62*	1595	A-29 ^{1/2}	A-29 ^{1/2}	780	A-49	A-49	1280	
Z-30 ^{1/2}	Z-30 ^{1/2}	795	Z-63*	1620	A-30	A-30	795	A-49 ^{3/4}	1300		
Z-31	Z-31	805	Z-63 ^{1/2} *	Z-63 ^{1/2}	1630	A-30 ^{1/2}	805	A-50	A-50	1310	
Z-31 ^{1/2}	Z-31 ^{1/2}	820	Z-64*	1645	A-31	A-31	825	A-51	A-51	1330	
Z-32 ^{1/4}		840	Z-65*	1670	A-31 ^{1/4}	830	A-51 ^{3/4}	1350			
Z-32 ^{1/2}	Z-32 ^{1/2}	845	Z-66*	1695	A-31 ^{3/4}	845	A-52	A-52	1355		
Z-33 ^{1/2}	Z-33 ^{1/2}	870	Z-67*	Z-67	1720	A-32	A-32	850	A-52 ^{1/4}	1365	
Z-34		885	Z-68*	1745	A-32 ^{1/4}	855	A-52 ^{3/4}	1380			
Z-34 ^{1/2}	Z-34 ^{1/2}	895	Z-69*	1770	A-32 ^{1/2}	870	A-53	A-53	1385		
Z-35 ^{1/2}	Z-35 ^{1/2}	920	Z-71*	Z-71	1820	A-33	A-33	875	A-53 ^{3/4}	1405	
Z-36	Z-36	930	Z-72*	1850	A-33 ^{1/4}	880	A-54	A-54	1410		
Z-36 ^{1/2}		945	Z-75*	Z-75	1920	A-34	A-34	900	A-54 ^{3/4}	1430	
Z-37	Z-37	955	Z-78*	1995	A-34 ^{1/4}	905	A-55	A-55	1435		
Z-37 ^{1/2}	Z-37 ^{1/2}	970	Z-79*	2020	A-34 ^{3/4}	920	A-55 ^{1/2}	1450			
Z-38 ^{1/2}	Z-38 ^{1/2}	995	Z-80 ^{1/2} *	2055	A-35	A-35	925	A-56	A-56	1460	
Z-39	Z-39	1005	Z-84*	2145	A-35 ^{1/4}	930	A-56 ^{3/4}	1480			
Z-39 ^{1/2}	Z-39 ^{1/2}	1020	Z-88 ^{1/2} *	2260	A-35 ^{3/4}	945	A-57	A-57	1485		
Z-40		1035	Z-93 ^{1/2} *	2385	A-36	A-36	950	A-57 ^{3/4}	1505		
Z-40 ^{1/2}		1050	Z-99*	2525	A-36 ^{1/4}	955	A-58	A-58	1510		
Z-41		1065			A-37	A-37	975	A-58 ^{3/4}	1530		
Z-41 ^{1/2}	Z-41 ^{1/2}	1070			A-37 ^{1/4}	980	A-59	A-59	1535		
Z-42	Z-42	1080			A-37 ^{3/4}	995	A-59 ^{3/4}	1555			
Z-43		1105			A-38	A-38	1000	A-60	A-60	1560	
Z-43 ^{1/2}		1122			A-38 ^{1/4}	1005	A-60 ^{3/4}	1580			
Z-44	Z-44	1140			A-39	A-39	1025	A-61	A-61	1585	
Z-45	Z-45	1170			A-39 ^{1/4}	1030	A-61 ^{3/4}	1605			
Z-45 ^{1/2}	Z-45 ^{1/2}	1180			A-39 ^{3/4}	1045	A-62	A-62	1610		
Z-46	Z-46	1200			A-40	A-40	1055	A-62 ^{3/4}	1630		
Z-47	Z-47	1220			A-40 ^{1/4}	1060	A-63	A-63	1635		

* Hi-Power® MN with belt references Z-51 up to Z-99 have a full-profile, raw edge construction.

Dimensions in bold are available from stock.

HI-POWER® MN / HI-POWER® SIZE LISTING

ISO belt ref.			ISO belt ref.			B			17 mm		
MN	Wrapped	Datum length	MN	Wrapped	Datum length	MN	Wrapped	Datum length	Datum length		
		mm ISO			mm ISO			mm ISO	mm ISO		
A-63 ^{3/4}		1655	A-86 ^{1/2}		2230	A-128		3290	B-21 ^{1/2}	610	
A-64	A-64	1660	A-86 ^{3/4}		2240	A-130		3340	B-23 ^{1/2}	655	
A-64 ^{1/2}		1680	A-87	A-87	2245	A-134		3440	B-24	670	
A-65	A-65	1690	A-88	A-88	2270	A-136		3490	B-24 ^{3/4}	690	
A-65 ^{1/2}		1706	A-88 ^{3/4}		2290	A-140		3590	B-25	B-25	695
A-66	A-66	1715	A-89	A-89	2295	A-144		3695	B-26	B-26	710
A-66 ^{1/2}		1730	A-89 ^{1/2}		2315	A-147		3770	B-26 ^{1/2}		725
A-67	A-67	1735	A-90	A-90	2325	A-158		4050	B-27	B-27	735
A-67 ^{1/2}		1755	A-90 ^{1/2}		2340	A-173		4430	B-27 ^{1/2}	B-27 ^{1/2}	745
A-68	A-68	1765	A-91	A-91	2350	A-180		4610	B-27 ^{3/4}		765
A-68 ^{1/2}		1780	A-91 ^{1/2}		2365				B-28	B-28	770
	A-69	1790	A-92	A-92	2375				B-28 ^{3/4}		790
A-69 ^{1/2}		1805	A-92 ^{1/2}		2390				B-29	B-29	795
A-70	A-70	1815	A-93	A-93	2400				B-30	B-30	815
A-70 ^{1/2}		1830	A-93 ^{3/4}		2420				B-30 ^{3/4}		840
A-71	A-71	1840	A-94	A-94	2425				B-31	B-31	845
A-71 ^{1/2}		1855	A-94 ^{3/4}		2445				B-31 ^{3/4}		865
A-72	A-72	1865	A-95	A-95	2450				B-32	B-32	870
A-72 ^{1/2}		1885	A-95 ^{3/4}		2470				B-32 ^{1/4}		875
A-73	A-73	1890	A-96	A-96	2475				B-32 ^{3/4}		890
A-73 ^{1/2}		1910	A-96 ^{3/4}		2495				B-33	B-33	895
A-74	A-74	1915	A-97	A-97	2500				B-33 ^{3/4}		915
A-74 ^{1/2}		1930	A-98	A-98	2525				B-34	B-34	920
A-75	A-75	1940	A-98 ^{1/4}		2530				B-34 ^{1/2}		930
A-75 ^{3/4}		1960	A-99	A-99	2545				B-35	B-35	940
A-76	A-76	1965	A-99 ^{3/4}		2570				B-36	B-36	965
A-76 ^{3/4}		1985	A-100	A-100	2575				B-37	B-37	990
A-77	A-77	1990	A-101 ^{3/4}		2620				B-37 ^{1/2}		1005
A-77 ^{1/2}		2010	A-102	A-102	2625				B-38	B-38	1015
A-78	A-78	2020	A-104	A-104	2680				B-39	B-39	1040
A-78 ^{1/2}		2030	A-104 ^{3/4}		2700				B-39 ^{1/2}		1055
A-79	A-79	2040	A-105	A-105	2705				B-40	B-40	1065
A-79 ^{1/2}		2062	A-107		2755				B-40 ^{1/4}		1070
A-80	A-80	2070	A-107 ^{3/4}		2775				B-40 ^{1/2}		1080
A-80 ^{3/4}		2090	A-108	A-108	2780				B-40 ^{3/4}		1090
A-81	A-81	2095	A-109		2800				B-41	B-41	1095
A-81 ^{1/2}		2115	A-109 ^{1/2}		2820				B-41 ^{1/4}		1100
A-82	A-82	2120	A-110	A-110	2830				B-41 ^{3/4}		1115
A-82 ^{1/2}		2130	A-111 ^{3/4}		2875				B-42	B-42	1120
A-83	A-83	2145	A-112	A-112	2880				B-42 ^{1/2}		1130
A-83 ^{1/4}		2150	A-113 ^{1/2}		2925				B-42 ^{3/4}		1140
A-83 ^{3/4}		2165	A-114 ^{1/2}		2950				B-43	B-43	1145
A-84	A-84	2170	A-115 ^{1/2}		2975				B-43 ^{1/2}		1160
A-84 ^{1/2}		2180	A-116 ^{1/2}		3000				B-44	B-44	1170
A-84 ^{3/4}		2190		A-118	3035				B-44 ^{3/4}		1190
A-85	A-85	2195		A-120	3085				B-45	B-45	1195
A-86	A-86	2220		A-124	3185				B-45 ^{1/2}		1205

Dimensions in bold are available from stock.



HI-POWER® MN / HI-POWER® SIZE LISTING

ISO belt ref.		Datum length	ISO belt ref.		Datum length	ISO belt ref.		Datum length	ISO belt ref.		Datum length
MN	Wrapped	mm ISO	MN	Wrapped	mm ISO	MN	Wrapped	mm ISO	MN	Wrapped	mm ISO
B-45 ^{3/4}		1215		B-68	1780	B-90	B-90	2335	B-131		3380
B-46	B-46	1220	B-67 ^{1/2}		1765	B-90 ^{1/4}		2340	B-133		3430
B-46 ^{3/4}		1240	B-68 ^{1/2}		1790	B-91	B-91	2365	B-134		3455
B-47	B-47	1245	B-68 ^{3/4}		1800	B-91 ^{1/2}		2375	B-136		3505
B-47 ^{1/2}		1255		B-69	1805	B-92	B-92	2390	B-140		3610
B-47 ^{3/4}		1265	B-69 ^{1/2}		1805	B-93	B-93	2415	B-144		3710
B-48	B-48	1270	B-70	B-70	1830	B-93 ^{1/2}		2430	B-147		3785
B-48 ^{3/4}		1290	B-70 ^{1/2}		1840	B-94	B-94	2440	B-148		3810
B-49	B-49	1295	B-71	B-71	1855	B-94 ^{1/2}		2455	B-152		3910
B-49 ^{3/4}		1315	B-71 ^{1/2}		1870	B-95	B-95	2465	B-157		4040
B-50	B-50	1320	B-72	B-72	1880	B-95 ^{1/2}		2480	B-158		4065
B-50 ^{3/4}		1340	B-72 ^{1/2}		1890	B-96	B-96	2490	B-162		4165
B-51	B-51	1345	B-73	B-73	1905	B-96 ^{1/2}		2505	B-165		4240
B-51 ^{1/2}		1360	B-73 ^{1/2}		1920	B-97	B-97	2515	B-167		4295
B-52	B-52	1370	B-74	B-74	1930	B-98	B-98	2540	B-173		4445
B-52 ^{1/4}		1375	B-74 ^{1/2}		1940	B-98 ^{1/2}		2555	B-175		4495
B-52 ^{3/4}		1390	B-75	B-75	1955	B-99	B-99	2565	B-177		4545
B-53	B-53	1395	B-75 ^{1/2}		1970	B-99 ^{1/2}		2580	B-180		4625
B-53 ^{1/4}		1400	B-76	B-76	1980	B-100	B-100	2590	B-186		4775
B-53 ^{1/2}		1415	B-76 ^{1/2}		1990	B-100 ^{1/2}		2605	B-195		5005
B-54	B-54	1425	B-77	B-77	2005	B-102	B-102	2640	B-196		5030
B-54 ^{1/2}		1440	B-77 ^{1/2}		2020	B-102 ^{1/2}		2655	B-204		5250
B-55	B-55	1450	B-78	B-78	2030	B-103	B-103	2665	B-208		5335
B-55 ^{1/2}		1465	B-78 ^{1/2}		2040	B-103 ^{3/4}		2690	B-210		5385
B-56	B-56	1475	B-79	B-79	2060	B-104	B-104	2695	B-221		5625
B-56 ^{1/2}		1490	B-79 ^{1/2}		2070	B-104 ^{1/2}		2705	B-225		5730
B-57	B-57	1500	B-80	B-80	2085	B-105	B-105	2720	B-240		6110
B-57 ^{1/2}		1515	B-80 ^{1/2}		2100	B-105 ^{3/4}		2740	B-249		6340
B-58	B-58	1525	B-81	B-81	2110	B-106	B-106	2745	B-270		6870
B-58 ^{1/2}		1540	B-81 ^{1/2}		2125	B-106 ^{1/2}		2760	B-300		7635
B-59	B-59	1550	B-82	B-82	2135	B-107 ^{3/4}		2790			
B-59 ^{1/2}		1565	B-82 ^{1/2}		2140	B-108	B-108	2795			
B-60	B-60	1575	B-83	B-83	2160	B-109 ^{3/4}		2840			
B-60 ^{1/2}		1590	B-83 ^{1/2}		2175	B-110	B-110	2845			
B-61	B-61	1600	B-84	B-84	2185	B-111 ^{1/2}		2885			
B-61 ^{1/2}		1615	B-84 ^{1/2}		2200	B-112	B-112	2895			
B-62	B-62	1625	B-85	B-85	2210	B-113 ^{3/4}		2940			
B-62 ^{1/2}		1640	B-85 ^{1/2}		2225	B-114	B-114	2945			
B-63	B-63	1650	B-86	B-86	2235	B-114 ^{1/2}		2960			
B-63 ^{1/2}		1665	B-86 ^{1/4}		2240	B-115 ^{1/2}		2990			
B-64	B-64	1675	B-86 ^{1/2}		2250	B-116	B-116	3000			
B-64 ^{1/2}		1690		B-87	2260		B-118	3050			
B-65	B-65	1700	B-87 ^{3/4}		2280		B-120	3100			
B-65 ^{1/2}		1715	B-88	B-88	2285		B-122	3150			
B-66	B-66	1730	B-88 ^{1/2}		2300		B-124	3200			
B-66 ^{1/2}		1740	B-89	B-89	2310		B-128	3300			
B-67	B-67	1755	B-89 ^{1/2}		2325		B-130	3350			

Dimensions in bold are available from stock.

HI-POWER® MN / HI-POWER® SIZE LISTING

C						D					
		22 mm						32 mm			
ISO belt ref.	Datum	ISO belt ref.	Datum	ISO belt ref.	Datum	ISO belt ref.	Datum	ISO belt ref.	Datum	ISO belt ref.	Datum
MN	Wrapped	length	MN	Wrapped	length	MN	Wrapped	MN	Wrapped	MN	length
		mm ISO			mm ISO						mm ISO
C-42	C-42	1145	C-75 ^{1/2}		1990	C-108	C-108			D-98	2570
C-43	C-43	1165	C-76 ^{1/2}		2015	C-108 ^{1/4}				D-104	2720
C-46	C-46	1245	C-77 ^{1/2}		2040	C-109				D-110	2975
C-47		1260	C-78	C-78	2055	C-109 ^{3/4}				D-120	3130
C-47 ^{1/2}		1275	C-78 ^{1/4}		2060	C-110	C-110			D-124	3230
C-48	C-48	1290	C-79 ^{1/2}		2090	C-110 ^{1/2}				D-128	3330
C-48 ^{1/2}		1310	C-80 ^{1/2}		2120	C-112	C-112			D-137	3560
C-49	C-49	1320	C-81	C-81	2130	C-113 ^{1/2}				D-140	3635
C-49 ^{1/2}		1335	C-81 ^{1/2}		2140	C-114 ^{1/2}				D-144	3740
C-50		1355	C-82	C-82	2155	C-115	C-115			D-158	4095
C-51	C-51	1370	C-82 ^{1/2}		2165	C-115 ^{1/2}				D-162	4195
C-51 ^{1/2}		1380	C-83	C-83	2180		C-116			D-170	4400
C-52 ^{1/2}		1410	C-83 ^{1/2}		2190		C-118			D-173	4475
C-53	C-53	1420	C-84 ^{1/2}		2215		C-120			D-177	4575
C-53 ^{1/2}		1435	C-85	C-85	2230		C-124			D-180	4650
C-54	C-54	1445	C-85 ^{1/2}		2240		C-128			D-187	4830
C-54 ^{1/2}		1460	C-86 ^{1/2}		2270		C-130			D-195	5035
C-55	C-55	1470	C-87		2300		C-132			D-197	5085
C-55 ^{1/2}		1485	C-88	C-88	2310		C-134			D-204	5260
C-56		1510	C-88 ^{1/2}		2320		C-136			D-210	5415
C-57		1535	C-89 ^{1/4}		2345		C-140			D-223	5680
C-58		1560	C-90	C-90	2360		C-144			D-240	6115
C-59	C-59	1570	C-92	C-92	2410		C-147			D-250	6365
C-59 ^{1/2}		1580	C-92 ^{1/2}		2420		C-153			D-270	6875
C-60	C-60	1595	C-93	C-93	2435		C-158			D-282	7180
C-60 ^{1/2}		1610	C-93 ^{1/2}		2445		C-162			D-298	7585
C-61 ^{1/4}		1630	C-94 ^{1/2}		2470		C-165			D-300	7635
C-62	C-62	1650	C-95	C-95	2485		C-173			D-330	8400
C-62 ^{1/2}		1660	C-95 ^{1/2}		2495		C-177			D-360	9160
C-65	C-65	1725	C-96	C-96	2510		C-180				
C-65 ^{1/2}		1735	C-96 ^{1/2}		2520		C-180				
C-66	C-66	1750	C-97	C-97	2535		C-195				
C-66 ^{1/2}		1760	C-98	C-98	2560		C-208				
C-67 ^{1/2}		1785	C-98 ^{3/4}		2585		C-210				
C-68	C-68	1800	C-99	C-99	2590		C-222				
C-68 ^{1/2}		1810	C-99 ^{1/2}		2600		C-225				
C-69 ^{1/2}		1835	C-100	C-100	2615		C-238				
C-70	C-70	1850	C-100 ^{1/4}		2620		C-240				
C-70 ^{1/2}		1860	C-101 ^{1/2}		2650		C-250				
C-71	C-71	1875	C-102	C-102	2665		C-255				
C-71 ^{1/2}		1885	C-102 ^{1/2}		2675		C-255				
C-72	C-72	1900	C-103 ^{1/2}		2700		C-270				
C-72 ^{1/2}		1910	C-104	C-104	2715		C-280				
C-73 ^{1/2}		1940	C-104 ^{1/2}		2725		C-285				
C-74	C-74	1950	C-105	C-105	2740		C-300				
C-74 ^{1/2}		1960	C-105 ^{1/2}		2750		C-330				
C-75	C-75	1980	C-107 ^{3/4}		2810						

Dimensions in bold are available from stock.

HI-POWER® DUBL-V SIZE LISTING

AA			13 mm BB			17 mm CC			22 mm	
Belt ref.	Effective length	Datum length	Belt ref.	Effective length	Datum length	Belt ref.	Effective length	Datum length		
	mm RMA	mm ISO		mm RMA	mm ISO		mm RMA	mm ISO		
AA51	1350	1330	BB118	3070	3050	CC75	2010	1980		
AA55	1450	1435	BB120	3120	3100	CC81	2165	2130		
AA60	1575	1560	BB122	3170	3150	CC85	2265	2230		
AA68	1780	1765	BB123	3200	3175	CC90	2395	2360		
AA75	1960	1940	BB124	3225	3200	CC96	2545	2510		
AA80	2085	2070	BB127	3300	3275	CC105	2775	2740		
AA85	2210	2195	BB128	3325	3300	CC112	2950	2920		
AA90	2340	2325	BB129	3350	3325	CC120	3155	3120		
AA92	2390	2375	BB130	3375	3350	CC128	3360	3325		
AA96	2490	2475	BB136	3530	3505	CC136	3560	3525		
AA105	2720	2705	BB144	3730	3710	CC144	3765	3730		
AA112	2900	2880	BB155	4010	3990	CC158	4120	4085		
AA120	3100	3085	BB158	4085	4065	CC162	4220	4190		
AA128	3305	3290	BB168	4340	4320	CC173	4500	4465		
			BB169	4365	4345	CC180	4680	4645		
			BB173	4470	4445	CC195	5060	5025		
			BB180	4645	4625	CC210	5440	5405		
			BB195	5025	5005	CC240	6150	6120		
			BB210	5410	5385	CC270	6915	6880		
			BB226	5775	5755	CC300	7675	7640		
			BB228	5825	5805	CC330	8440	8405		
			BB230	5880	5855	CC360	9200	9165		
			BB240	6130	6110	CC390	9960	9930		
			BB270	6895	6870	CC420	10725	10690		
			BB277	7070	7050					
			BB300	7655	7635					
						DD			32 mm	
						Belt ref.	Effective length	Datum length		
							mm RMA	mm ISO		
						DD210	5465	5415		
						DD270	6925	6875		
						DD300	7690	7635		
						DD360	9215	9160		

This Hi-Power® belt is characterised by its double-V profile. It is the ideal solution for "serpentine" drives (drives with counterrotating shafts) requiring power to be transmitted to grooved pulleys from both the top and the bottom of the belts.

Dimensions in bold are available from stock.

MICRO-V® SIZE LISTING

PJ			PJ			PL		
Belt ref.		Effective length	Belt ref.		Effective length	Belt ref.		Effective length
DIN 7867	RMA	mm DIN/ISO	DIN 7867	RMA	mm DIN/ISO	DIN 7867	RMA	mm DIN/ISO
PJ 356	140 J	356	PJ 1371	540 J	1371	PL 954	375 L	954
PJ 381	150 J	381	PJ 1397	550 J	1397	PL 991	390 L	991
PJ 406	160 J	406	PJ 1428	562 J	1428	PL 1075	423 L	1075
PJ 432	170 J	432	PJ 1439	567 J	1439	PL 1270	500 L	1270
PJ 457	180 J	457	PJ 1473	580 J	1473	PL 1333	525 L	1333
PJ 483	190 J	483	PJ 1549	610 J	1549	PL 1371	540 L	1371
PJ 508	200 J	508	PJ 1600	630 J	1600	PL 1397	550 L	1397
PJ 559	220 J	559	PJ 1651	650 J	1651	PL 1422	560 L	1422
PJ 584	230 J	584	PJ 1663	655 J	1663	PL 1562	615 L	1562
PJ 610	240 J	610	PJ 1752	690 J	1752	PL 1613	635 L	1613
PJ 660	260 J	660	PJ 1854	730 J	1854	PL 1664	655 L	1664
PJ 711	280 J	711	PJ 1895	746 J	1895	PL 1715	675 L	1715
PJ 723	285 J	723	PJ 1910	752 J	1910	PL 1765	695 L	1765
PJ 737	290 J	737	PJ 1930	760 J	1930	PL 1803	710 L	1803
PJ 762	300 J	762	PJ 1956	770 J	1956	PL 1842	725 L	1842
PJ 813	320 J	813	PJ 1981	780 J	1981	PL 1943	765 L	1943
PJ 838	330 J	838	PJ 1992	784 J	1992	PL 1981	780 L	1981
PJ 864	340 J	864	PJ 2083	820 J	2083	PL 2019	795 L	2019
PJ 914	360 J	914	PJ 2210	870 J	2210	PL 2070	815 L	2070
PJ 955	376 J	955	PJ 2337	920 J	2337	PL 2096	825 L	2096
PJ 965	380 J	965	PJ 2489	980 J	2489	PL 2134	840 L	2134
PJ 1016	400 J	1016				PL 2197	865 L	2197
PJ 1041	410 J	1041				PL 2235	880 L	2235
PJ 1067	420 J	1067				PL 2324	915 L	2324
PJ 1092	430 J	1092				PL 2362	930 L	2362
PJ 1105	435 J	1105				PL 2476	975 L	2476
PJ 1110	437 J	1110				PL 2515	990 L	2515
PJ 1118	440 J	1118				PL 2705	1065 L	2705
PJ 1123	442 J	1123				PL 2743	1080 L	2743
PJ 1130	445 J	1130				PL 2845	1120 L	2845
PJ 1136	447 J	1136				PL 2896	1140 L	2896
PJ 1150	453 J	1150				PL 2921	1150 L	2921
PJ 1168	460 J	1168				PL 2997	1180 L	2997
PJ 1194	470 J	1194				PL 3086	1215 L	3086
PJ 1200	473 J	1200				PL 3124	1230 L	3124
PJ 1222	480 J	1222				PL 3289	1295 L	3289
PJ 1233	485 J	1233				PL 3327	1310 L	3327
PJ 1244	490 J	1244				PL 3493	1375 L	3493
PJ 1262	497 J	1262				PL 3696	1455 L	3696
PJ 1270	500 J	1270						
PJ 1280	504 J	1280						
PJ 1300	512 J	1300						
PJ 1309	515 J	1309						
PJ 1321	520 J	1321						
PJ 1333	525 J	1333						
PJ 1355	534 J	1355						

MICRO-V® SIZE LISTING

PM

Belt ref.		Effective length
DIN 7867	RMA	mm DIN/ISO
PM 2286	900 M	2286
PM 2388	940 M	2388
PM 2515	990 M	2515
PM 2693	1060 M	2693
PM 2832	1115 M	2832
PM 2921	1150 M	2921
PM 3010	1185 M	3010
PM 3124	1230 M	3124
PM 3327	1310 M	3327
PM 3531	1390 M	3531
PM 3734	1470 M	3734
PM 4089	1610 M	4089
PM 4191	1650 M	4191
PM 4470	1760 M	4470
PM 4648	1830 M	4648
PM 5029	1980 M	5029
PM 5410	2130 M	5410
PM 6121	2410 M	6121
PM 6502	2560 M	6502
PM 6883	2710 M	6883
PM 7646	3010 M	7646
PM 8408	3310 M	8408
PM 9169	3610 M	9169
PM 9931	3910 M	9931

POLYFLEX® JB™ SIZE LISTING

5M - JB

Belt ref.	Effective length mm
5M-JB 280	280
5M-JB 290	290
5M-JB 300	300
5M-JB 307	307
5M-JB 315	315
5M-JB 325	325
5M-JB 335	335
5M-JB 345	345
5M-JB 355	355
5M-JB 365	365
5M-JB 375	375
5M-JB 387	387
5M-JB 400	400
5M-JB 412	412
5M-JB 425	425
5M-JB 437	437
5M-JB 450	450
5M-JB 462	462
5M-JB 475	475
5M-JB 487	487
5M-JB 500	500
5M-JB 515	515
5M-JB 530	530
5M-JB 545	545
5M-JB 560	560
5M-JB 580	580
5M-JB 600	600
5M-JB 615	615
5M-JB 630	630
5M-JB 650	650
5M-JB 670	670
5M-JB 690	690
5M-JB 710	710
5M-JB 730	730
5M-JB 750	750
5M-JB 775	775
5M-JB 800	800
5M-JB 825	825
5M-JB 850	850
5M-JB 875	875
5M-JB 900	900
5M-JB 925	925
5M-JB 950	950
5M-JB 975	975
5M-JB 1000	1000
5M-JB 1030	1030
5M-JB 1060	1060

7M - JB

Belt ref.	Effective length mm
7M-JB 500	490
7M-JB 515	505
7M-JB 530	520
7M-JB 545	535
7M-JB 560	550
7M-JB 580	570
7M-JB 600	590
7M-JB 615	605
7M-JB 630	620
7M-JB 650	640
7M-JB 670	660
7M-JB 690	680
7M-JB 710	703
7M-JB 730	723
7M-JB 750	743
7M-JB 775	768
7M-JB 800	793
7M-JB 825	818
7M-JB 850	843
7M-JB 875	868
7M-JB 900	893
7M-JB 925	918
7M-JB 950	943
7M-JB 975	968
7M-JB 1000	993
7M-JB 1030	1023
7M-JB 1060	1053
7M-JB 1090	1083

11M - JB

Belt ref.	Effective length mm
7M-JB 1120	1113
7M-JB 1150	1143
7M-JB 1180	1173
7M-JB 1220	1213
7M-JB 1250	1243
7M-JB 1280	1273
7M-JB 1320	1313
7M-JB 1360	1353
7M-JB 1400	1393
7M-JB 1450	1443
7M-JB 1500	1493
7M-JB 1550	1543
7M-JB 1600	1593
7M-JB 1650	1643
7M-JB 1700	1693
7M-JB 1750	1743
7M-JB 1800	1793
7M-JB 1850	1843
7M-JB 1900	1893
7M-JB 1950	1943
7M-JB 2000	1993
7M-JB 2060	2053
7M-JB 2120	2113
7M-JB 2180	2173
7M-JB 2240	2233
7M-JB 2300	2293
11M-JB 710	692
11M-JB 730	712
11M-JB 750	732
11M-JB 775	757
11M-JB 800	782
11M-JB 825	807
11M-JB 850	832
11M-JB 875	857
11M-JB 900	882
11M-JB 925	907
11M-JB 950	932
11M-JB 975	957
11M-JB 1000	982
11M-JB 1030	1012
11M-JB 1060	1042
11M-JB 1090	1072
11M-JB 1120	1102
11M-JB 1150	1132
11M-JB 1180	1162
11M-JB 1220	1202
11M-JB 1250	1232
11M-JB 1280	1262
11M-JB 1320	1302
11M-JB 1360	1342
11M-JB 1400	1382
11M-JB 1450	1432
11M-JB 1500	1482
11M-JB 1550	1532
11M-JB 1600	1582
11M-JB 1650	1632
11M-JB 1700	1682
11M-JB 1750	1732
11M-JB 1800	1782
11M-JB 1850	1832
11M-JB 1900	1882
11M-JB 1950	1932
11M-JB 2000	1982
11M-JB 2060	2042
11M-JB 2120	2102
11M-JB 2180	2162
11M-JB 2240	2222
11M-JB 2300	2282

DRIVE DESIGN

Before designing a V-belt drive, you need to know these four things:

1. power requirement of the drive;
2. the RPM of the driveR machine;
3. the RPM of the driveN machine;
4. the approximate centre distance for the drive.

Important!

This drive design manual has been adapted to the ISO 1081 standard, which involves a change in belt length terminology. **All belts according to ISO 4184: 1992 in this manual are identified with their datum length. This length is only a reference and replaces the former pitch length for V-belts.** In order to find the pitch length, the values mentioned in the tables below have to be added to or subtracted from this datum length.

V-Belts

FOR SECTION	SPZ XPZ	SPA XPA	SPB XPB	SPC XPC	3V 3VX	5V 5VX	8V/25J 8VK	9J	15J	Z	A	B	C	D
Subtract	0	0	0	0	4	7.5	16	4	7.5	0	0	0	0	0

Micro-V® and Polyflex® JB™ Belts

FOR SECTION	PJ	PL	PM	5M-JB	7M-JB	11M-JB
Add	8	22	31	4	7	11

STEP 1

SELECT THE DESIRED SERVICE LIFE RANGE

Service life of a belt drive depends on the specific use and function. Usually a machine completes 2 to 5 years of service before needing new belts. For the belt drive, this may mean an actual operating time from a few hundred hours to many thousands of hours.

The performance rating (belt life) given is based on constant load / constant speed laboratory testing under controlled environmental conditions.

By selecting the appropriate service life for a drive and designing accordingly, you obtain the most economical drive for your specific application. You can design your drive through the computerised design service offered by Gates, by using DesignFlex, Gates' windows based drive design software program or by using this manual.

In selecting the service life also consider the following factors:

1. the probability of more severe use of the drive in some special applications or geographical areas;
2. the machine-warranty period;
3. the cost of down-time needed to replace belts.

- Gates Drive Design Manual facilitates the design of Gates V-belt drives for different service lives according to the needs of the machine by applying the appropriate additional kW.

- Industrial machinery for continuous use is usually designed without a service life correction factor. This results in 3 to 5 years belt life.

DRIVE DESIGN

Table No. 1 - Service factors

DriveN machine	DriveR*					
	AC Motors: Normal torque, squirrel cage, synchronous.			AC Motors: High torque, single phase, slip ring.		
The machines listed below are representative examples only. Select the group of which the load characteristics most closely approximate those of the machine being considered.	DC Motors: Shunt wound.			DC Motors: Series wound, compound wound.		
	Engines: Multiple cylinder internal, combustion.			Engines: Single cylinder internal combustion.		
	Intermittent service	Normal service	Continuous service	Intermittent service	Normal service	Continuous service
	Up to 8 hrs daily or seasonal	8-16 hrs daily	>16 hrs daily	Up to 8 hrs daily or seasonal	8-16 hrs daily	>16 hrs daily
Agitators for liquids Blowers & exhausters Centrifugal pumps & compressors Fans up to 7.5 kW Light-duty conveyors	1.0	1.1	1.2	1.1	1.2	1.3
Conveyor belts for sand, grain, etc. Dough mixers Fans over 7.5 kW Generators Line shafts Laundry machinery Machine tools Punches-presses-shears Printing machinery Positive displacement rotary pumps Revolving and vibrating screens	1.1	1.2	1.3	1.2	1.3	1.4
Brick machinery Bucket elevators Exciters Piston compressors Conveyors (drag-pan-screw) Hammer mills Paper mill beaters Piston pumps Positive displacement blowers Pulverizers Saw mill and woodworking machinery Textile machinery	1.2	1.3	1.4	1.4	1.5	1.6
Crushers (gyratory-jaw-roll) Mills (ball-rod-tube) Hoists Rubber calenders-extruders-mills	1.3	1.4	1.5	1.5	1.6	1.8

* Apply indicated service factor to continuous engine rating. Deduct 0.2 (with a minimum service factor of 1.0) when applying to maximum intermittent rating. The use of a service factor of 2.0 is recommended for equipment subject to choking and to stalling.

DRIVE DESIGN

STEP 2

FIND THE DESIGN POWER

Design power = service factor x drive power (kW).

- A. Select the proper service factor from Table No. 1. If your driveN machine is not listed, use the service factor of a machine with comparable starting, running and shock load characteristics.
- B. The power requirement of the drive is usually taken as the name plate rating of the driveR. The actual load requirement of the driveN machine, if known, may be used as the power requirement to give a more accurate design.
- C. Find the design kilowatt by multiplying the power requirement of the drive by the service factor.

STEP 3

SELECT THE PROPER V-BELT SECTION

Speed of the faster shaft and design power determine the proper cross-section.



- A. At the bottom of Table No. 2, 3 or 4 read across to the design power of the drive, interpolating if necessary.
- B. Read straight up to the rpm of the faster shaft. Interpolate if necessary.
- C. The designation (e.g.: XPZ - SPZ - 3VX - 3V etc.) in the area surrounding the point of intersection is the proper belt cross-section.

NOTE: if the intersection is found between two areas, select the most economical belt section.

3


DRIVE DESIGN

Table No. 2 - Cross-section selection chart - V-belts

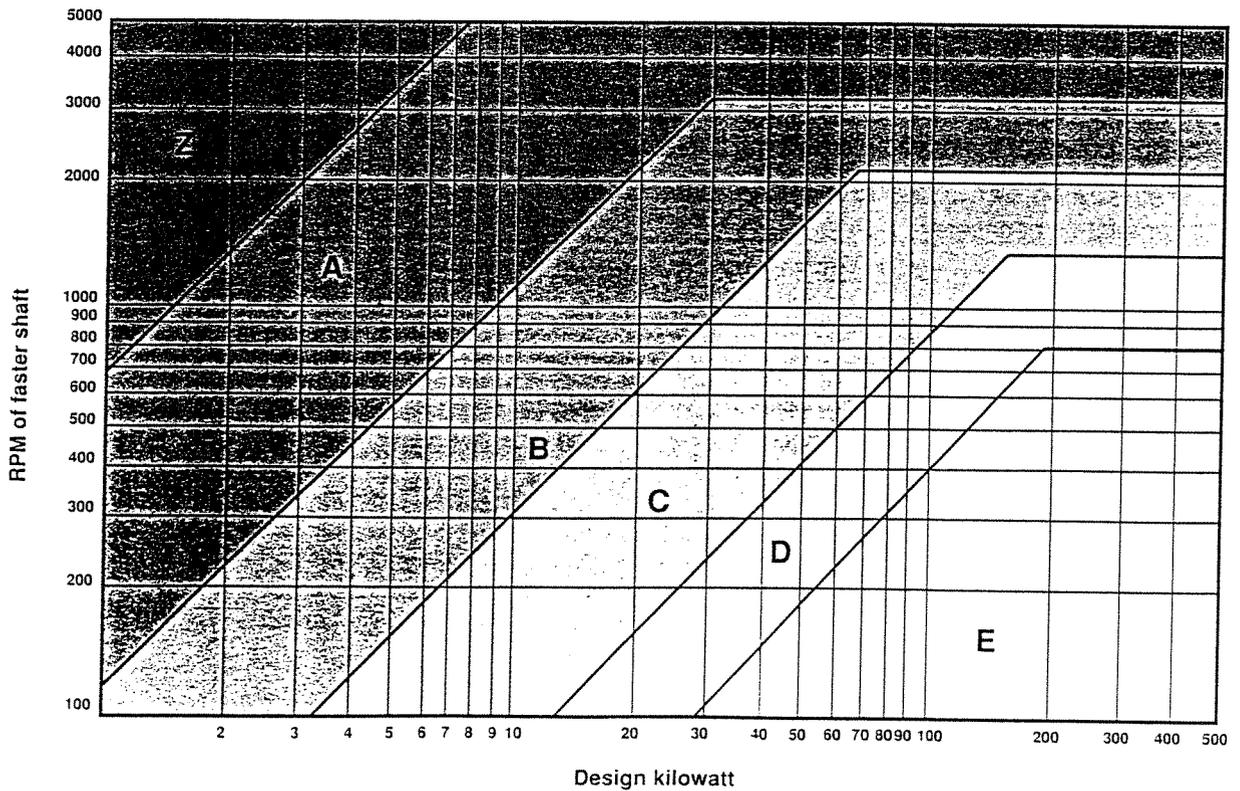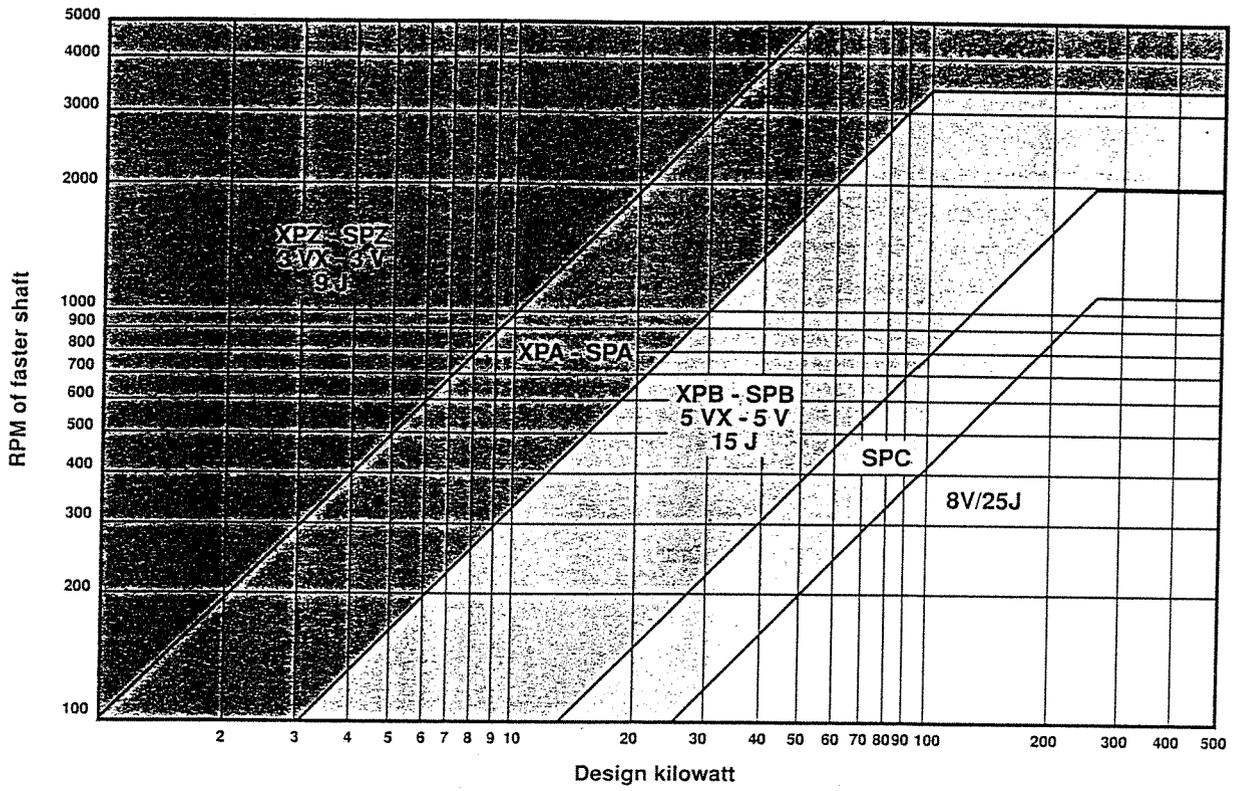


DRIVE DESIGN

Table No. 3 - Cross-section selection chart - Micro-V® belts

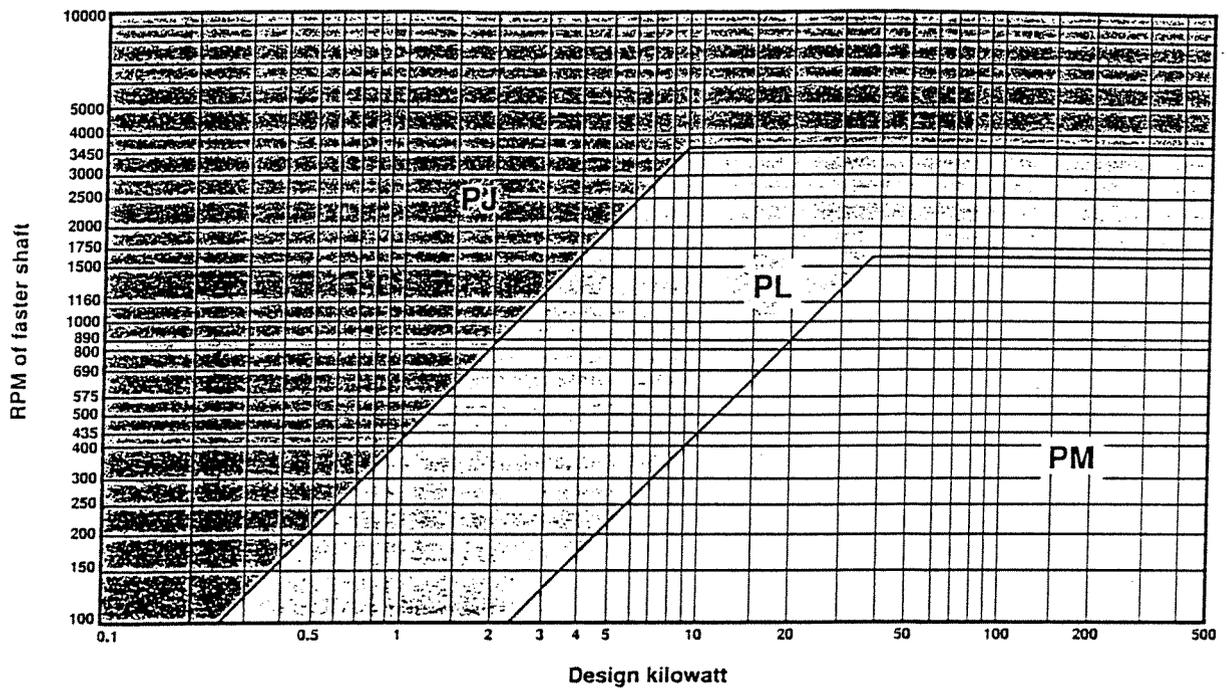

3

Table No. 4 - Cross-section selection chart - Polyflex® JB™ belts

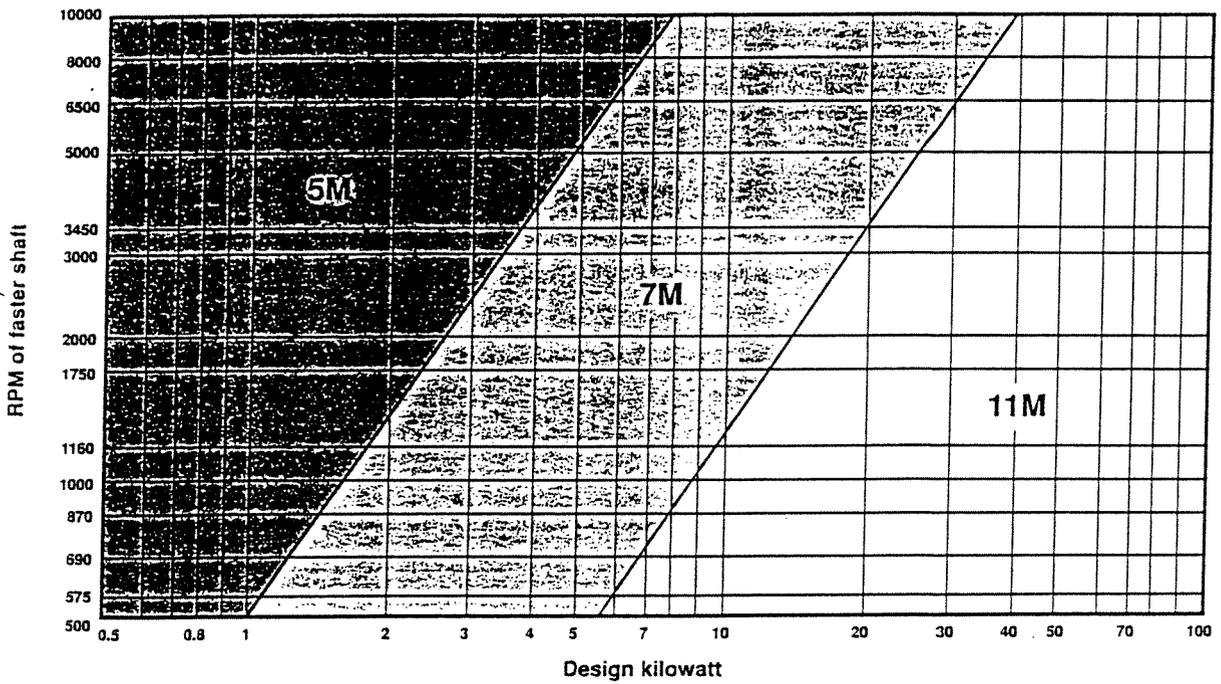

DRIVE DESIGN

125	132	140	150	160	170	180	190	200	212	224	236	250	280	315	355	400	450	500	560	630	710	800	900	1000	1120	1250	1400	1600	Section	
X		X		X		X		X		X		X	X	X	X	X														PJ
X		X		X		X		X		X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		PL
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	PM
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SPZ / 3V
M	M	M	M	M	X	X	M	M	M	M	M	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	SPA	
																														SPB/ 5V
																														SPC
																														8V / 25J
																														8VK
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	XPZ / 3VX
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	XPA
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	XPB / 5VX
																														XPC
																														Z
																														A
																														B
																														C
																														D
																														5M
																														7M
																														11M

125	132	140	150	160	170	180	190	200	212	224	236	250	280	315	355	400	450	500	560	630	710	800	900	1000	1120	1250	1400	1600	Pulley Ø mm		
6.25	6.60	7.00	7.50	8.00	8.50	9.00	9.50	10.00	10.60	11.20	11.80	12.50	14.00	15.75	17.75	20.00	22.50	25.00	28.00											20	
5.21	5.50	5.83	6.25	6.67	7.08	7.50	7.92	8.33	8.83	9.33	9.83	10.42	11.67	13.13	14.79	16.67	18.75	20.83	23.33	26.25	29.58									24	
4.81	5.08	5.38	5.77	6.15	6.54	6.92	7.31	7.69	8.15	8.62	9.08	9.62	10.77	12.12	13.65	15.38	17.31	19.23	21.54	24.23	27.31									26	
4.46	4.71	5.00	5.36	5.71	6.07	6.43	6.79	7.14	7.57	8.00	8.43	8.93	10.00	11.25	12.68	14.29	16.07	17.86	20.00	22.50	25.36	28.57								28	
4.17	4.40	4.67	5.00	5.33	5.67	6.00	6.33	6.67	7.07	7.47	7.87	8.33	9.33	10.50	11.83	13.33	15.00	16.67	18.67	21.00	23.67	26.67								30	
3.91	4.13	4.38	4.69	5.00	5.31	5.63	5.94	6.25	6.63	7.00	7.38	7.81	8.75	9.84	11.09	12.50	14.06	15.63	17.50	19.69	22.19	25.00	28.13							32	
3.68	3.88	4.12	4.41	4.71	5.00	5.29	5.59	5.88	6.24	6.59	6.94	7.35	8.24	9.26	10.44	11.76	13.24	14.71	16.47	18.53	20.88	23.53	26.47	29.41						34	
3.47	3.67	3.89	4.17	4.44	4.72	5.00	5.28	5.56	5.89	6.22	6.56	6.94	7.78	8.75	9.96	11.11	12.50	13.89	15.56	17.50	19.72	22.22	25.00	27.78						36	
3.29	3.47	3.68	3.95	4.21	4.47	4.74	5.00	5.26	5.58	5.89	6.21	6.58	7.37	8.29	9.34	10.53	11.84	13.16	14.74	16.58	18.68	21.05	23.68	26.32	29.47					38	
3.13	3.30	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.30	5.60	5.90	6.25	7.00	7.88	8.88	10.00	11.25	12.50	14.00	15.75	17.75	20.00	22.50	25.00	28.00					40	
2.98	3.14	3.33	3.57	3.81	4.05	4.29	4.52	4.76	5.05	5.33	5.62	5.95	6.67	7.50	8.45	9.52	10.71	11.90	13.33	15.00	16.90	19.05	21.43	23.81	26.67	29.76				42	
2.78	2.93	3.11	3.33	3.56	3.78	4.00	4.22	4.44	4.71	4.98	5.24	5.56	6.22	7.00	7.89	8.89	10.00	11.11	12.44	14.00	15.78	17.78	20.00	22.22	24.89	27.78				45	
2.60	2.75	2.92	3.13	3.33	3.54	3.75	3.96	4.17	4.42	4.67	4.92	5.21	5.83	6.56	7.40	8.33	9.38	10.42	11.67	13.13	14.79	16.67	18.75	20.83	23.33	26.04	29.17			48	
2.50	2.64	2.80	3.00	3.20	3.40	3.60	3.80	4.00	4.24	4.48	4.72	5.00	5.60	6.30	7.10	8.00	9.00	10.00	11.20	12.60	14.20	16.00	18.00	20.00	22.40	25.00	28.00			50	
2.36	2.49	2.64	2.83	3.02	3.21	3.40	3.58	3.77	4.00	4.23	4.45	4.72	5.28	5.94	6.70	7.55	8.49	9.43	10.57	11.89	13.40	15.09	16.98	18.87	21.13	23.58	26.42			53	
2.23	2.36	2.53	2.68	2.86	3.04	3.21	3.39	3.57	3.79	4.00	4.21	4.46	5.00	5.63	6.34	7.14	8.04	8.93	10.00	11.25	12.68	14.29	16.07	17.86	20.00	22.32	25.00	28.57			56
2.08	2.20	2.33	2.50	2.67	2.83	3.00	3.17	3.33	3.53	3.73	3.93	4.17	4.67	5.25	5.92	6.67	7.50	8.33	9.33	10.50	11.83	13.33	15.00	16.67	18.67	20.83	23.33	26.67			60
1.98	2.10	2.22	2.38	2.54	2.70	2.86	3.02	3.17	3.37	3.56	3.75	3.97	4.44	5.00	5.63	6.35	7.14	7.94	8.89	10.00	11.27	12.70	14.29	15.87	17.78	19.84	22.22	25.40			63
1.87	1.97	2.09	2.24	2.39	2.54	2.69	2.84	2.99	3.16	3.34	3.52	3.73	4.18	4.70	5.30	5.97	6.72	7.46	8.36	9.40	10.60	11.94	13.43	14.93	16.72	18.66	20.90	23.88			67
1.76	1.86	1.97	2.11	2.25	2.39	2.54	2.68	2.82	2.99	3.15	3.32	3.52	3.94	4.44	5.00	5.63	6.34	7.04	7.89	8.87	10.00	11.27	12.68	14.08	15.77	17.61	19.72	22.54			71
1.67	1.76	1.87	2.00	2.13	2.27	2.40	2.53	2.67	2.83	2.99	3.15	3.33	3.73	4.20	4.73	5.33	6.00	6.67	7.47	8.40	9.47	10.67	12.00	13.33	14.93	16.67	18.67	21.33			75
1.56	1.65	1.75	1.88	2.00	2.13	2.25	2.38	2.50	2.65	2.80	2.95	3.13	3.50	3.94	4.44	5.00	5.63	6.25	7.00	7.88	8.88	10.00	11.25	12.50	14.00	15.63	17.50	20.00			80
1.47	1.55	1.65	1.76	1.88	2.00	2.12	2.24	2.35	2.49	2.64	2.78	2.94	3.29	3.71	4.18	4.71	5.29	5.88	6.59	7.41	8.35	9.41	10.59	11.76	13.18	14.71	16.47	18.82			85
1.39	1.47	1.56	1.67	1.78	1.89	2.00	2.11	2.22	2.36	2.49	2.62	2.78	3.11	3.50	3.94	4.44	5.00	5.56	6.22	7.00	7.89	8.89	10.00	11.11	12.44	13.89	15.56	17.78			90
1.32	1.39	1.47	1.58	1.68	1.79	1.89	2.00	2.11	2.23	2.36	2.48	2.63	2.95	3.32	3.74	4.21	4.74	5.26	5.89	6.63	7.47	8.42	9.47	10.53	11.79	13.16	14.74	16.84			95
1.25	1.32	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.12	2.24	2.36	2.50	2.80	3.15	3.55	4.00	4.50	5.00	5.60	6.30	7.10	8.00	9.00	10.00	11.20	12.50	14.00	16.00			100
1.18	1.25	1.32	1.42	1.51	1.60	1.70	1.79	1.89	2.00	2.11	2.23	2.36	2.64	2.97	3.35	3.77	4.25	4.72	5.28	5.94	6.70	7.55	8.49	9.43	10.57	11.79	13.21	15.09			106
1.12	1.18	1.25	1.34	1.43	1.52	1.61	1.70	1.79	1.89	2.00	2.11	2.23	2.50	2.81	3.17	3.57	4.02	4.46	5.00	5.63	6.34	7.14	8.04	8.93	10.00	11.16	12.50	14.29			112
1.06	1.12	1.19	1.27	1.36	1.44	1.53	1.61	1.69	1.80	1.90	2.00	2.12	2.37	2.67	3.01	3.39	3.81	4.24	4.75	5.34	6.02	6.78	7.63	8.47	9.49	10.59	11.86	13.56			118
1.00	1.06	1.12	1.20	1.28	1.36	1.44	1.52	1.60	1.70	1.79	1.89	2.00	2.24	2.52	2.84	3.20	3.60	4.00	4.48	5.04	5.68	6.40	7.20	8.00	8.96	10.00	11.20	12.8			125
	1.00	1.06	1.14	1.21	1.29	1.36	1.44	1.52	1.61	1.70	1.79	1.89	2.12	2.39	2.69	3.03	3.41	3.79	4.24	4.77	5.38	6.06	6.82	7.58	8.48	9.47	10.61	12.12			132
		1.00	1.07	1.14	1.21	1.29	1.36	1.43	1.51	1.60	1.69																				

DRIVE DESIGN

STEP 4

FIND THE SPEED RATIO

Formula No. 1:

$$\text{Speed ratio} = \frac{\text{RPM of faster shaft}}{\text{RPM of slower shaft}}$$

Find the desired SPEED RATIO by dividing the RPM of the faster shaft by the RPM of the slower shaft.

If you are replacing a chain or gear drive, the speed ratio is the number of teeth on the large sprocket or gear divided by the number of teeth on the small sprocket or gear. If you are replacing a flat belt drive, divide the larger pulley diameter by the smaller pulley diameter.

STEP 5

CHOOSE THE PULLEY DATUM DIAMETER

diámetro da polia menor

You should use standard diameter pulleys for the drive in order to obtain the most economical drive.

Table No. 5 on page 28 shows the diameters of the available standard pulleys for each cross-section.

If a minimum or maximum diameter for one of the pulleys is known, or if you have one pulley on hand, start with that diameter. If you do not know the datum diameter of a pulley on hand, measure the outside diameter and groove width. Determine from the tables Nos. 15 to 18 (pages 40 to 42) if the pulley is of ISO, DIN or RMA dimension, referring to the column identified as "go" (groove outside diameter). Then subtract or add the value shown in table No. 7 or 8 (page 31) to find the datum diameter.

STEP 6

CALCULATE THE BELT SPEED

A. Formula No. 2:

$$V = \frac{d \times n}{19100}$$

Where: V = belt speed (m/s)

d = datum diameter of one pulley (mm)

n = RPM of that same pulley

The belt speed should not exceed 30 m/s because for higher belt speeds special and dynamically balanced pulleys are required. If the belt speed is too high, choose smaller diameter pulleys (see step 6, C).

B. Locate the small pulley datum diameter in the appropriate column of table No. 6 (page 28). Read across to the available speed ratio closest to the value calculated in step 4. Find the LARGE PULLEY DATUM

DIAMETER at the head of the column. You can also locate the datum diameter of a known large pulley and read down to the speed ratio, to find the datum diameter of the small pulley in the appropriate column at the left of the table. Pulleys with these datum diameters are generally available from stock. To be sure, check with your supplier. If necessary, use the next pulley combination giving the required speed ratio.

NOTE: speed ratios shown in table No. 6 are based on standard datum diameters. Speed ratios of actual drives may vary slightly due to drive tension, load and/or belt construction. If the driveN speed of your drive is critical, check with your Gates representative.

C. Most machines do not require exact driveN speeds to operate efficiently. Speeds vary because the speed of common driveR motors usually varies by several percent. The speed of an ordinary induction motor for example, varies with load and line voltage.

Because of the different standardisation systems not all cross-sections in table No. 5 are identified with their reference or datum diameter. For the cross-sections identified with effective length, the effective diameter is given (e.g. Micro-V®, PowerBand®, Polyflex® JB™). To find the exact speed ratio you have to correct these effective diameters by using the values given in the tables Nos. 7 and 8 (see page 31).

D. Belt speed should be kept reasonably high if possible (20 to 30 m/s) by using larger pulley diameters. Higher belt speed results in higher power ratings and fewer belts, thus producing a more economical drive. Higher belt speed also means lower operating tensions, thereby decreasing shaft and bearing loads. High belt speed is less important on lightly loaded, normal speed drives, where the cost of larger diameter pulleys (to obtain high belt speed) may result in a less economical drive, or in the use of one belt which sacrifices multiple belt dependability. For heavy-duty drives, it is best to compare several design possibilities to make the most economical choice.

DRIVE DESIGN

Table No. 7 - Amount in mm to subtract from the outside diameter to find the datum diameter of a grooved V-belt pulley

FOR SECTION	SPZ XPZ	SPA XPA	SPB XPB	SPC XPC	3V 3VX	5V 5VX	8V/25J 8VK	9J	15J	Z	A	B	C	D
Subtract	4	5.5	7	9.6	1.3	2.5	5	1.2	2.6	5	6.6	8.4	11.4	16.2

Table No. 8 - Amount in mm to add to the outside diameter to find the datum diameter of a Micro-V® or Polyflex® JB™ pulley

FOR SECTION	PJ	PL	PM	5M-JB	7M-JB	11M-JB
Add	2.5	7	10	1.3	2.3	3.6

STEP 7

SELECT CENTRE DISTANCE AND V-BELT LENGTH

There are practically no centre distance limits for Gates V-belt drives. They are especially recommended for short centre distances, which means more economical drives and more compact designs. However, long centre distances can be used just as well if required.

A. If you do not know an approximate centre distance for the drive, a TENTATIVE CENTRE DISTANCE needs to be taken. To obtain a good estimate, use the large pulley diameter.

Alternatively the centre distance can be calculated by:

Formula No. 3:

$$TCD = \frac{D + 3d}{2}$$

Where: TCD = tentative centre distance (mm)

D = datum diameter large pulley (mm)

d = datum diameter small pulley (mm)

You can then find a tentative belt length by using the following formula:

Formula No. 4:

$$TBL = 2 \times TCD + 1.57 (D + d) + \frac{(D - d)^2}{4 \times TCD}$$

Where: TBL = tentative belt length (mm)

B. Now select a STANDARD V-BELT LENGTH from the size listing on pages 10 to 22, closest to the length obtained by using formula No. 4. THE ACTUAL CENTRE DISTANCE can then be calculated by using formula No. 5:

Formula No. 5:

$$A = \frac{F - h (D - d)}{2}$$

Where: A = actual centre distance (mm)

F = PL - 1.57 (D + d)

with PL = belt datum length (mm)

h = a centre distance factor depending on the value of (D - d)/F.

See Table No. 9.

Table No. 9 - Centre distance factor "h"

$\frac{D-d}{F}$	Factor h	$\frac{D-d}{F}$	Factor h	$\frac{D-d}{F}$	Factor h
0.00	0.00	0.21	0.11	0.40	0.22
0.02	0.01	0.23	0.12	0.41	0.23
0.04	0.02	0.25	0.13	0.43	0.24
0.06	0.03	0.27	0.14	0.44	0.25
0.08	0.04	0.29	0.15	0.46	0.26
0.10	0.05	0.30	0.16	0.47	0.27
0.12	0.06	0.32	0.17	0.48	0.28
0.14	0.07	0.34	0.18	0.50	0.29
0.16	0.08	0.35	0.19	0.51	0.30
0.18	0.09	0.37	0.20		
0.20	0.10	0.39	0.21		

C. Alternative method

The nomogram (table No. 10) allows you to calculate centre distance and belt length in a fast and efficient way and converts the nominal values to design values. The centre distance and belt length calculated this way are approximate values and can only be used where centre distance corrections are still possible.

Two scales are given to enhance readability.

Make sure to use the corresponding colours.

Example:

Pulleys: DriveR = XPB-112

DriveN machine = XPB-236

Requested centre distance: 500 mm (black scale)

(d + D) = 112 + 236 = 348 (black scale)

Indicated length (continuous line) = approx. 1550 mm


Closest standard length = XPB-1500

Indicated centre distance (dotted line) =

approx. 475 mm

DRIVE DESIGN

Table No. 10 - Centre distance and belt length

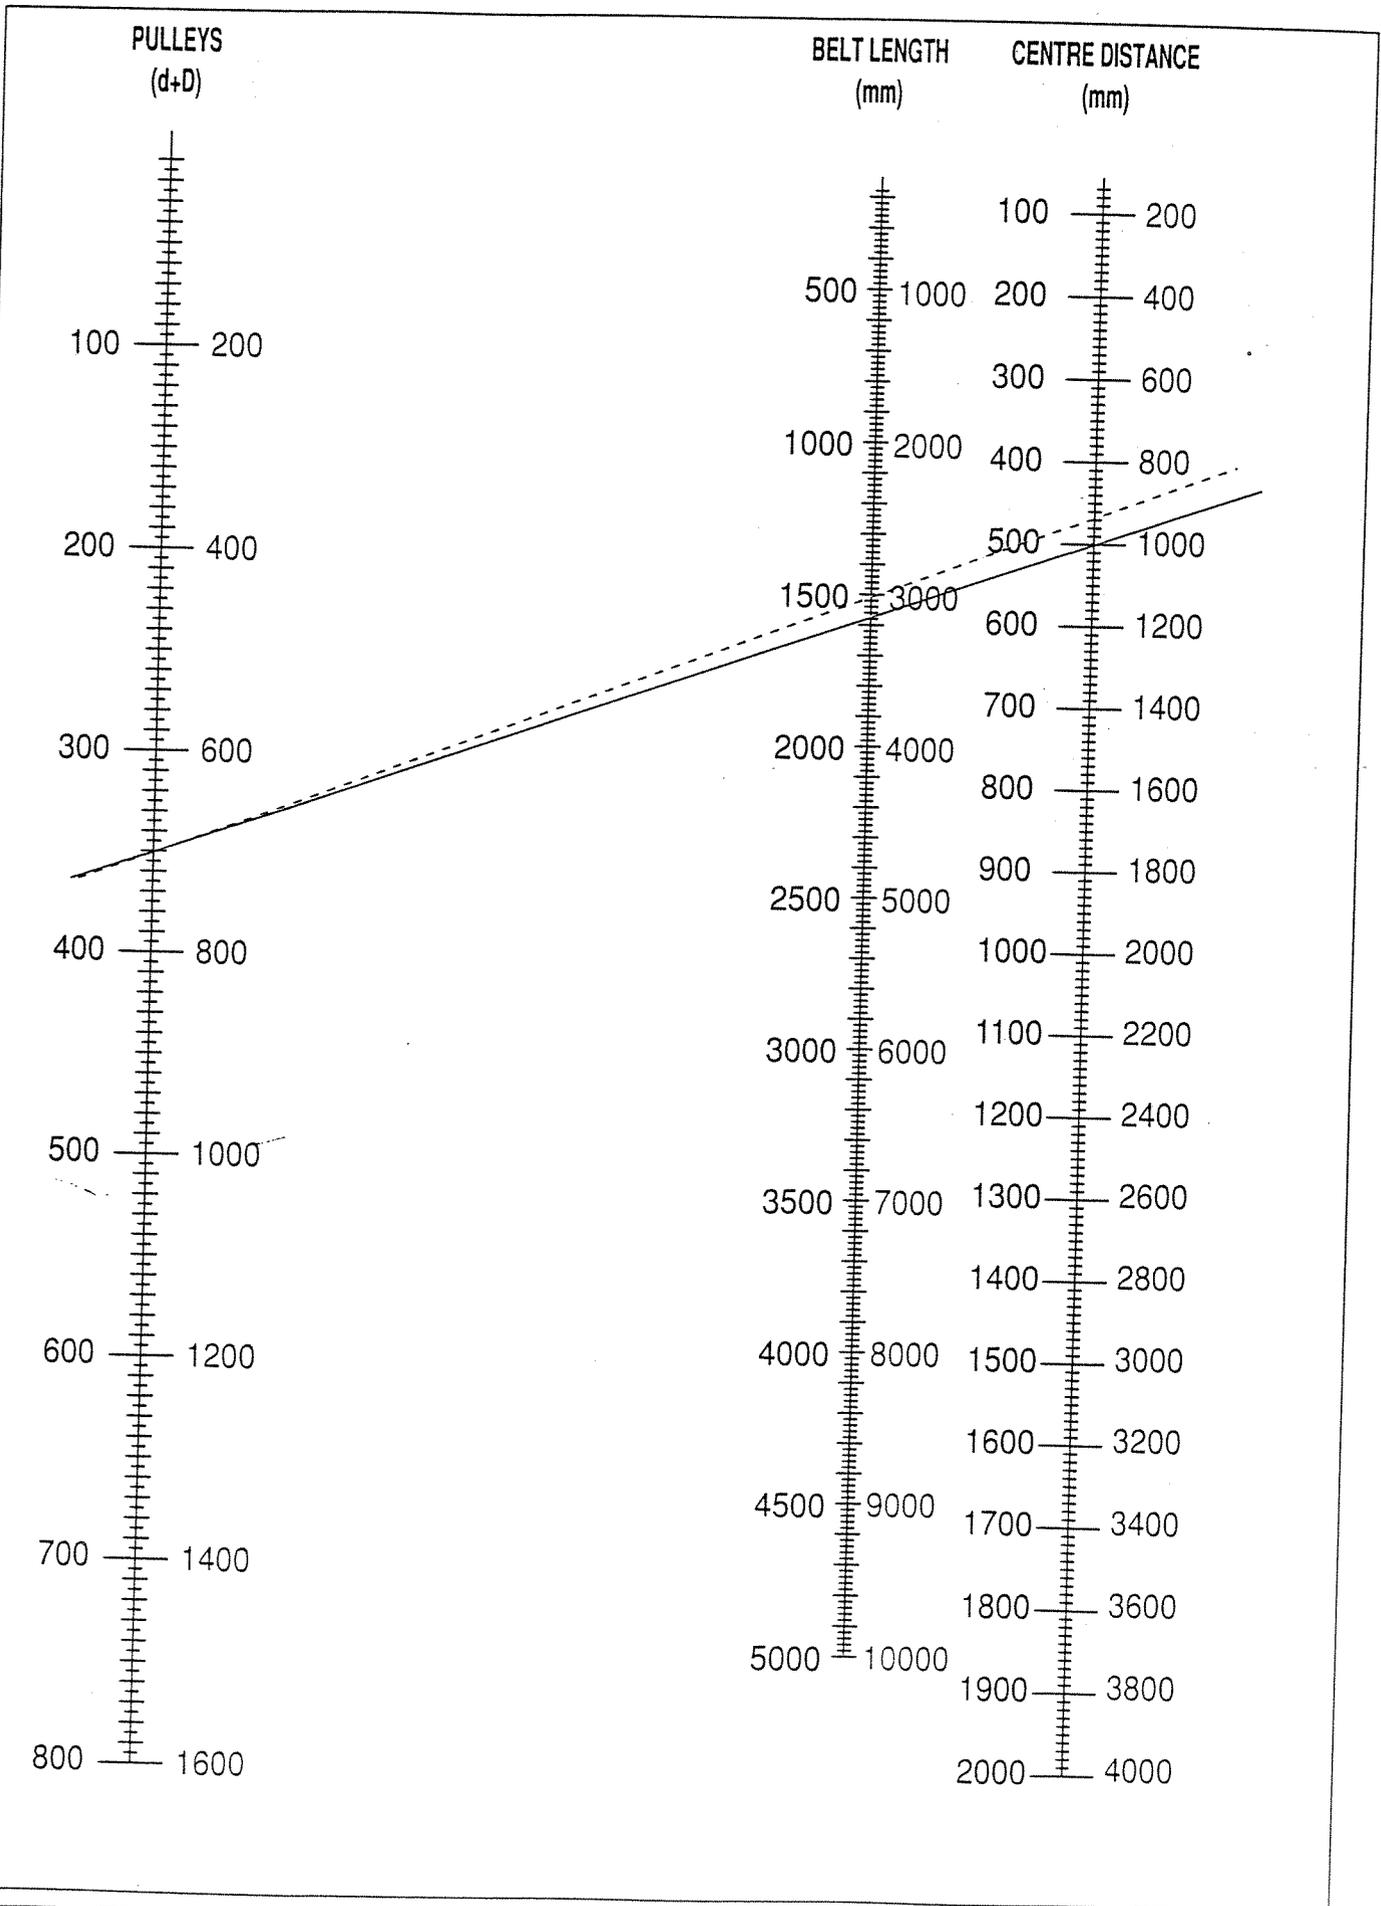

DRIVE DESIGN

STEP 8

FIND THE NUMBER OF BELTS OR RIBS REQUIRED

For the following design steps, fold out the back cover page and open the manual on the pages with the kW rating tables for the selected cross-section.

- A. Find the basic kilowatt rating "A" for your small pulley diameter and speed from the appropriate cross-section table A (pages 48 to 89).

BASIC kW RATING (A)

- B. Then define the "additional kilowatt" for the speed ratio, from table B.

ADDITIONAL kW RATING FOR SPEED RATIO (B)

- C. Table C gives the additional kW rating per belt for the chosen service life. If 25000 hrs were chosen then no additional kW is added (C=0). For 12000 hrs or 6000 hrs apply the formula in table C under the number of hours chosen.

ADDITIONAL kW RATING FOR BELT LIFE (C)

No value "C" is given for Micro-V® and Polyflex® JB™ belts. The calculated number of ribs only goes for a service life of 12000 hrs.

- D. Calculate $(D - d)/A$ and find the arc correction factor G from table G (D and d are the large and small datum diameters and A is the centre distance in mm).

ARC CORRECTION FACTOR (G)

- E. Then find the belt length correction factor C_L from table C_L for the chosen belt length.

BELT LENGTH CORRECTION FACTOR (C_L)

- F. Your net kW per belt or rib is found by following calculation:

$$(A + B + C) \times G \times C_L$$

NET kW PER BELT OR RIB

- G. Divide the design kilowatt by the net kilowatt per belt/rib to find the number of belts or ribs required for your drive.

$$\text{Number of belts or ribs} = \frac{\text{Design kW}}{\text{Net kW per belt/rib}}$$

The answer will usually contain a fraction. Use the next larger whole number of belts or ribs.

NUMBER OF BELTS OR RIBS

Before deciding upon this drive as your final design, see step 6, D for a drive review.


FINAL SELECTION

STEP 9

PROVIDE THE MINIMUM INSTALLATION AND TAKEUP ALLOWANCES

- A. Find the recommended installation and takeup allowances from table No. 11.

Figure 1

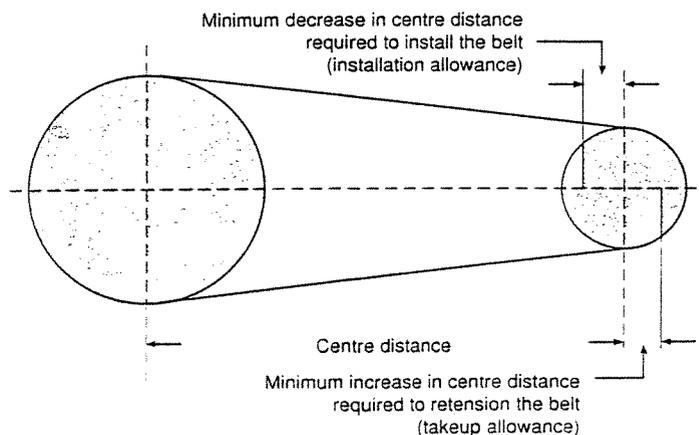

- B. If you cannot adjust the centre distance to install or takeup the belts, it is advisable to use an idler. Separate instructions on the use of idlers are given on page 45.

DRIVE DESIGN

Table No. 11 - Minimum installation and takeup allowances

V-belts

Datum length mm	Minimum installation allowance - mm																Minimum takeup allowance mm
	V-belt section																
	XPZ 3VX SPZ 3V	XPA SPA	XPB 5VX SPB 5V	XPC SPC	8V 8VK	9J PB	15J PB	8V PB* 25J PB*	Z	A	A PB	B	B PB SPB PB	C	C PB SPC PB	D	
420 - 1199	15	20	-	-	-	30	-	-	15	20	30	25	35	40	50	-	25
1200 - 1999	20	25	25	-	-	35	55	-	20	20	30	30	40	40	50	50	35
2000 - 2749	20	25	25	35	40	35	55	85	20	25	35	30	40	40	50	50	40
2750 - 3499	20	25	25	35	40	35	55	85	-	25	35	30	40	40	50	50	45
3500 - 4499	20	25	25	35	40	35	55	85	-	25	35	30	40	40	50	50	45
4500 - 5499	-	25	25	35	45	-	55	90	-	25	35	30	40	50	60	55	55
5500 - 6499	-	-	35	40	45	-	60	90	-	25	35	40	50	50	60	60	65
6500 - 7999	-	-	35	40	45	-	60	90	-	-	-	40	50	50	60	65	85
8000 -	-	-	35	45	50	-	60	100	-	-	-	-	50	50	60	65	95
																	110

* PB = PowerBand[®]

Micro-V[®] belts

Effective length mm	Minimum installation allowance - mm			Minimum takeup allowance mm
	Micro-V [®] belt section			
	PJ	PL	PM	All sections
up to 500	10			10
501 - 1000	15			20
1001 - 1500	15	25		25
1501 - 2000	20	25		35
2001 - 2500	20	30	40	40
2501 - 3000		30	40	45
3001 - 4000		35	45	60
4001 - 5000			45	65
5001 - 6000			50	70
6001 - 7500			55	85
7501 - 9000			65	100
9001 -			70	115

Polyflex[®] JB[™] belts

Effective length mm	Minimum installation allowance - mm			Minimum takeup allowance mm
	Polyflex [®] JB [™] belt section			
	5M-JB	7M-JB	11M-JB	All sections
280 - 300	10			5
307 - 710	15	15	25	15
730 - 1090	25	25	30	30
1120 - 1500	30	30	35	35
1550 - 1900	-	30	40	35
1950 - 2300	-	40	50	45

TENSIONING

V-BELT TENSIONING METHOD

Although tension on a V-belt drive is usually not critical, it is certainly important. Undertensioning creates slippage, generating excessive heat. This results in premature belt failure. Overtensioning also results in short belt life and increases shaft loads. To tension the drives properly and to keep V-belt tension under control Gates developed a "Tension Deflection Method".

STEP 10

FIND THE REQUIRED STATIC TENSION

Determine tension per strand/rib or belt.

The static tension (T_s) is given by this formula:

Formula No. 6:

$$T_s = 450 \times \frac{(R - G)}{G} \times \frac{\text{Drive Power kW}}{N \times V} + MV^2$$

Where: T_s = static tension (N) per strand/rib or belt

G = arc correction factor
(Table G from pages 48 to 89)

R = tension ratio factor: for V-belts and
Polyflex® JB™: 2.5;
for Micro-V® belts: 2.67.


N = number of belts or ribs

V = belt speed (m/s)

M = constant from table No. 13

Figure 2 - Tension measurement by deflection

Deflection force must always be directed perpendicular to the span.
Deflection = 1 mm per 100 mm of span.

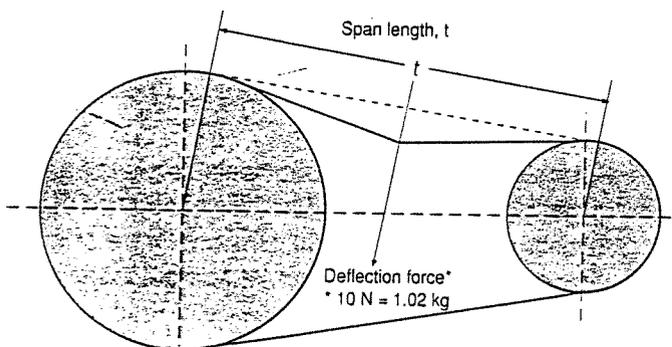

IMPORTANT

Polyflex® JB™ belts need minimum static tension per strand. If the calculated values are lower than the values given in table No. 12, do not use the calculated values, but the required minimum values given in table No. 12.

Table No. 12 - Minimum static tension per strand for Polyflex® JB™ belts

Section	Minimum static tension per strand (N)
5M-JB	35
7M-JB	65
11M-JB	160

STEP 11

DETERMINE THE DEFLECTION FORCES

Determine the minimum and maximum recommended forces to deflect one belt (or one belt with different strands if PowerBand®, Micro-V® or Polyflex® JB™ is used) for 1 mm per 100 mm of span length

A. The span length can be measured on the drive itself or from a scaled layout of the drive. For drives using only two pulleys, the span length can be calculated by this formula:

Formula No. 7:

$$t = A \left[1 - 0.125 \left(\frac{D - d}{A} \right)^2 \right]$$

Where: t = span length (mm)

A = centre distance (mm)

D = large pulley datum diameter (mm)

d = small pulley datum diameter (mm)

B. Calculate the deflection by following formula:

Formula No. 8:

$$\text{Deflection} = \frac{t}{100}$$

Where t = span length (mm) (see fig. 2)

C. If your drive uses two or more individual belts, Micro-V® belts, Polyflex® JB™ or PowerBand® calculate the minimum and maximum recommended deflection forces by following formulas:

Formula No. 9:

$$\text{Min. recommended deflection force (N)} = \frac{T_s + Y}{25}$$

Formula No. 10:

$$\text{Max. recommended deflection force (N)} = \frac{1.5 T_s + Y}{25}$$

Where Y = constant from Table No. 13

TENSIONING

D. If your drive has only one PowerBand®, Polyflex® JB™, individual belt or Micro-V® belt, calculate the minimum and maximum recommended deflection forces by following formulas:

Formula No. 11:

$$\text{Minimum recommended deflection force (N)} = \frac{T_s + \left(\frac{t}{L}\right) \times Y}{25}$$

Formula No. 12:

$$\text{Maximum recommended deflection force (N)} = \frac{1.5 T_s + \left(\frac{t}{L}\right) \times Y}{25}$$

Where: L = datum length in mm

E. The deflection forces calculated in step 11, D are for individual belts only. Multiply these forces by the number of individual belts or ribs in a band to get the minimum and maximum recommended forces for a PowerBand®, Polyflex® JB™ or Micro-V® belt. (If your drive uses 2 or more PowerBand®, Polyflex® JB™ or Micro-V® belts, use the band with the fewest number of individual belts).

Table No. 13 - Factor M and factor Y

Individual V-Belt and Micro-V® cross-section	M	Y	PowerBand® and Polyflex® JB™ cross-section	M
Z	0.05	9		
A	0.09	13	A	0.11
B	0.14	19	B	0.17
C	0.26	30	C	0.31
D	0.52	63	D	0.59
Z*	0.04	8		
A*	0.07	11		
B*	0.11	16		
C*	0.23	24		
SPZ/3V	0.066	15	9J/3V	0.08
SPA	0.12	20		
SPB/5V	0.17	26	SPB	0.21
			15J/5V	0.21
SPC	0.32	41	SPC	0.36
8V	0.46	60	8V/25J	0.53
SPZ*	0.05	15		
SPA*	0.1	20		
SPB*	0.15	26		
SPC*	0.28	41		
XPZ/3VX	0.06	15	3VX	0.07
XPA	0.104	20		
XPB/5VX	0.13	26	5VX	0.16
XPC	0.30	41		
PJ	0.006	1		
PL	0.022	4.4		
PM	0.089	11		
5M	0.006	2.2	5M-JB	0.009
7M	0.019	8.4	7M-JB	0.025
11M	0.039	15.5	11M-JB	0.053

* Moulded notch construction.

Note: for additional tensioning information on PowerBand®, see pages 37 to 39.


STEP 12

CHECK IF THE BELTS ARE PROPERLY TENSIONED


- Measure at the centre of the span (t) the force required to deflect the belt (or band of belts if PowerBand®, Polyflex® JB™ or Micro-V® are used) on the drive 1 mm per 100 mm span length from its normal position. If your drive is a single belt drive, or uses only one PowerBand®, be sure that at least one pulley is free to rotate. If not, use formulas 11 and 12.
- If the measured force is less than the minimum recommended deflection force, the belts should be tightened.
- New belts can be tensioned until the deflection force per belt is as close as possible to the maximum recommended deflection force. For used belts a deflection force above minimum is acceptable.
- To facilitate tension measuring Gates has developed three tension testers. The "Single Tension Tester" measures deflection force up to ±12 kg, the "Double Tension Tester" measures deflection force up to ±30 kg and the sonic tension meter measures all tension values by analysing sound waves. The first two tension testers consist of a calibrated spring with two scales: one to measure the deflection and another to measure the applied force (see figure on page 37). The reading of these scales can be done as follows.
 - Measure the span length (t).
 - The calculated deflection (formula No. 8) should be positioned with the lower ring on the distance scale. The upper ring should be on the zero position of the deflection force scale.
 - Put the tension tester perpendicular to the span and in the middle of the span. Exercise enough pressure to the tension tester to deflect the belt by the amount indicated by the lower ring. A straight edge, laid across pulleys, can help accuracy of reading.
 - The upper ring will slide up the upper scale and indicates the deflection force. Read at the bottom edge of the ring. When you use the "Double Tension Tester" you can read the values just underneath the rings and calculate the sum of both values. This value has to be compared with the calculated min./max. forces as per formula Nos. 9 to 12.

TENSIONING

Single tension tester

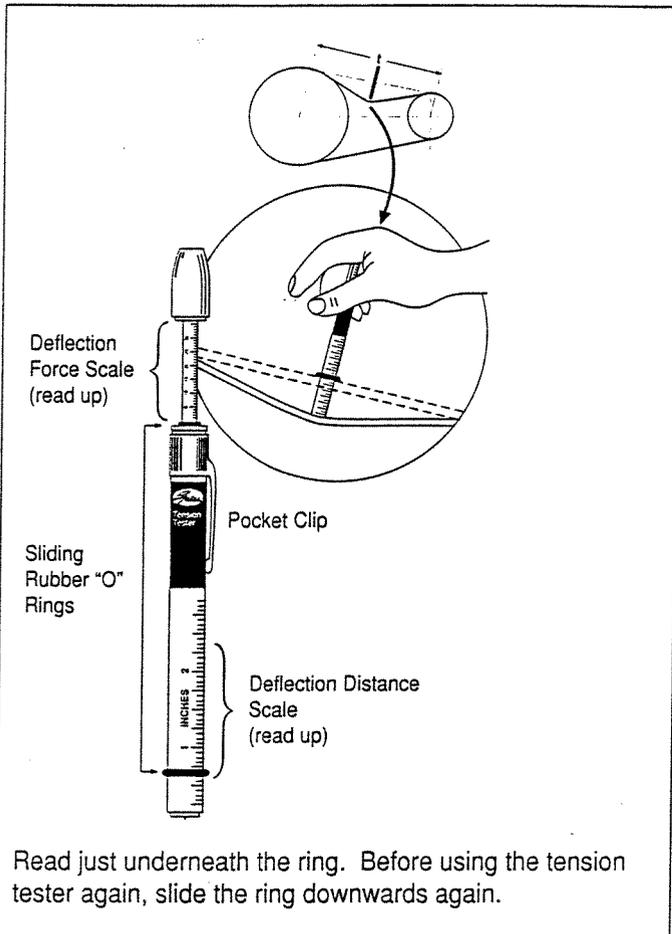

Sonic tension meter

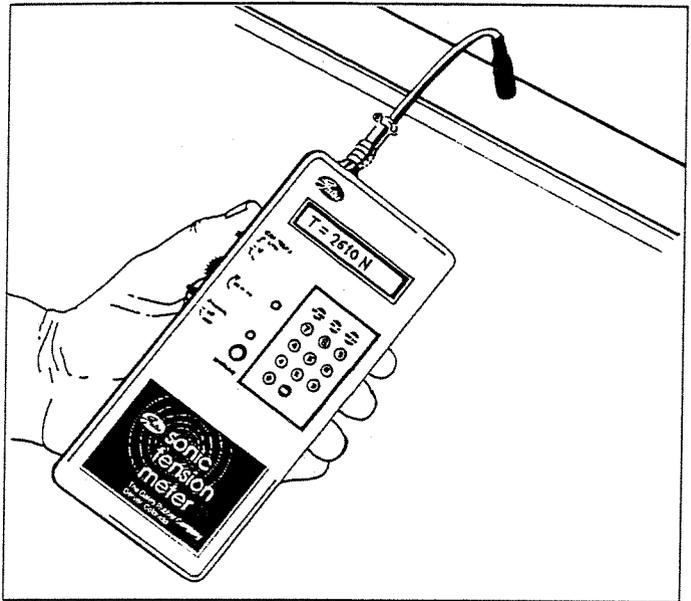

Unlike conventional tension testers which use force deflection, the sonic tension meter measures tension by analysing the sound waves which the belt produces when strummed. A belt vibrates at a particular frequency based on its tension, mass and span length. The tension tester transforms this frequency in a tension value.

The hand-held tension tester, running on batteries or on the mains (adapter included), is supplied with two types of sensors (rigid and flexible), either of which is quickly attached to meet a specific need. The meter has three switchable frequency ranges from 10 Hz to 600 Hz. By selecting the appropriate measurement range, background noise is cancelled out, hence ensuring improved accuracy.


1. Enter belt unit weight (provided with operating instructions), width and span on the keypad. These data remain in the meter even after shut-off.
2. Hold the small sensor up to the belt span and strum the belt slightly to make it vibrate.
3. Press the "measure" button. The computer processes the variations in sound pressure emanating from the belt span. The belt tension values are displayed on the panel in newtons. If desired, the belt span frequencies can be displayed directly in Hz.

For more detailed information, e.g. suitability of the tension meter for different belt product lines, please contact your Gates representative.

POWERBAND® TENSIONING METHOD

When the cross-section and number of individual belts become so large that tensioning by deflection cannot reasonably be done, another method will be used. This alternative method of checking PowerBand® tension is the elongation method. The principle is simple. Each tension value corresponds with a given amount of elongation.

Double tension tester

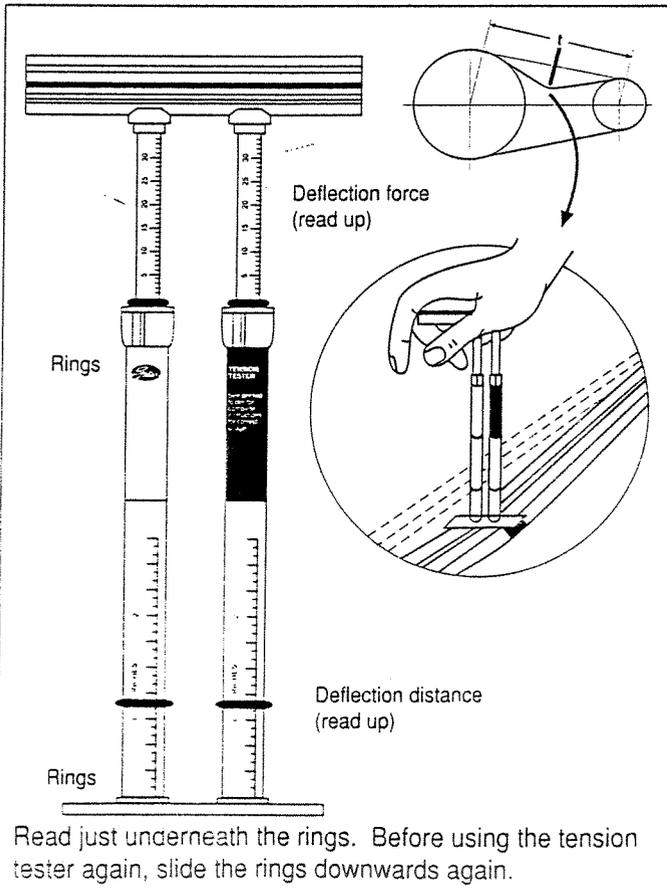

4

TENSIONING

Therefore the elongation of a PowerBand® as it is installed and tensioned on a drive is a measure of the static tension in the belt.

Elongation method for tensioning PowerBand®:

STEP I

FIND THE REQUIRED TENSION PER STRAND OF BELT (STATIC TENSION)

- A. Find the required static tension per strand, T_s , using formula No. 6 in step 10 of the regular V-belt tensioning method.
- B. Find the recommended minimum and maximum tension.
 Minimum tension = T_s
 Maximum tension = $1.5 \times T_s$

STEP II

FIND THE AMOUNT TO ELONGATE THE BELT (ON THE DRIVE) TO OBTAIN THE ABOVE TENSION

- A. Measure the outside circumference of the belt at no tension. This can be done with the belt either on or off the drive.
NOTE: if you are retensioning a used drive, slack off on the drive until there is no tension, then tape the outside circumference of the belt while it is still on the drive.
- B. Find the correct belt length multiplier from table No. 14 for each of the static tensions you calculated above.
- C. Multiply the taped outside circumference of the PowerBand® by each of the length multipliers. This gives the **elongated outside circumference** of the PowerBand® corresponding to each of the calculated tensions.

Table No. 14 - Belt length multipliers for PowerBand®

T_s (N)	9J (3V)	15 J (5V) SPB	SPC	25J (8V)	3VX	5VX	8VK	A	B		C		D
									< 3250	>3250	< 3250	>3250	
300	1.00821				1.00613								
350	1.00957				1.00715								
400	1.01094				1.00817								
450	1.01231	1.00532			1.00919	1.00337		1.00481					
500	1.01367	1.00591			1.01021	1.00374		1.00535					
550	1.01504	1.00650			1.01124	1.00412		1.00588					
600	1.01641	1.00709	1.00481		1.01226	1.00449		1.00642	1.00562	1.00674			
650	1.01778	1.00769	1.00515		1.01328	1.00487		1.00695	1.00608	1.00730			
700	1.01915	1.00828	1.00549	1.00449	1.01430	1.00524		1.00749	1.00655	1.00786	1.00393	1.00524	
750	1.02051	1.00887	1.00584	1.00481	1.01532	1.00561		1.00802	1.00702	1.00843	1.00421	1.00561	
800	1.02188	1.00946	1.00618	1.00513	1.01634	1.00599		1.00856	1.00749	1.00899	1.00449	1.00599	1.00310
900	1.02462	1.01064	1.00686	1.00578	1.01839	1.00674		1.00963	1.00843	1.01011	1.00505	1.00674	1.00348
1000	1.02735	1.01183	1.00754	1.00642	1.02043	1.00749	1.00132	1.01070	1.00936	1.01124	1.00562	1.00749	1.00387
1200		1.01419	1.00891	1.00770		1.00899	1.00158	1.01284	1.01124	1.01348	1.00674	1.00899	1.00465
1400		1.01656	1.01028	1.00899		1.01049	1.00185	1.01498	1.01311	1.01573	1.00786	1.01049	1.00542
1600		1.01893	1.01164	1.01027		1.01198	1.00211		1.01498	1.01798	1.00899	1.01198	1.00620
1800		1.02129	1.01301	1.01156		1.01348	1.00237		1.01686	1.02023	1.01011	1.01348	1.00697
2000		1.02366	1.01438	1.01284		1.01498	1.00264		1.01873	1.02248	1.01124	1.01498	1.00775
2250		1.02662	1.01608	1.01445		1.01685	1.00297		1.02107	1.02529	1.01264	1.01685	1.00872
2500		1.02957	1.01779	1.01605		1.01873	1.00330		1.02341	1.02810	1.01405	1.01873	1.00968
2750			1.01950	1.01766			1.00363				1.01545	1.02060	1.01065
3000			1.02121	1.01926			1.00396				1.01686	1.02247	1.01162
3250			1.02292	1.02087			1.00429				1.01826	1.02435	1.01259
3500			1.02462	1.02247			1.00462				1.01967	1.02622	1.01356
3750			1.02633	1.02408			1.00495				1.02107	1.02809	1.01453
4000			1.02804	1.02569			1.00528				1.02248	1.02997	1.01550
4250			1.02975	1.02729			1.00561				1.02388	1.03184	1.01647
4500			1.03146	1.02890			1.00594				1.02529	1.03371	1.01744
4750			1.03316	1.03050			1.00627				1.02669	1.03559	1.01840
5000			1.03487	1.03211			1.00660				1.02810	1.03746	1.01937
5250				1.03371			1.00693						1.02034
5500				1.03532			1.00727						1.02131
6000				1.03853			1.00793						1.02325

TENSIONING

STEP III

TENSION THE DRIVE

- A. With the PowerBand® installed on the drive, tighten it until the taped outside circumference corresponds to the elongated outside circumference range calculated above.
- B. For new belts, tighten the belts as close as possible to the calculated maximum elongated outside length based on the maximum tension.

4

PULLEYS

1. GROOVE SPECIFICATIONS FOR V-BELT PULLEYS

Figure 3 - Groove dimension nomenclature for V-belts

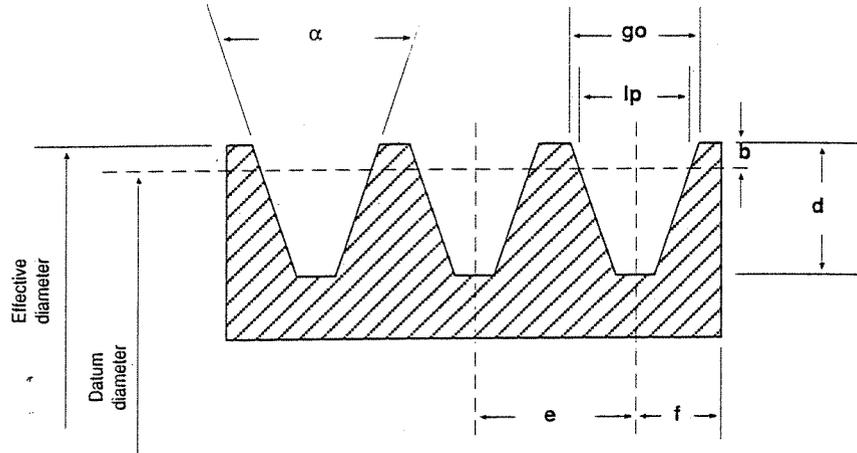


Table No. 15 - Groove dimensions and tolerances for Hi-Power[®] PowerBand[®] according to RMA engineering standards

Cross-section	Effective diam. range mm	Groove angle α	go mm	d mm	e * mm	f mm
A - PowerBand [®]	< 140	$34^\circ \pm 1/2^\circ$	12.55 ± 0.13	12.45 ± 0.79	15.88 ± 0.60	$9.53 (+1.78/-0)$
	> 140	$38^\circ \pm 1/2^\circ$	12.80 ± 0.13	12.45 ± 0.79	15.88 ± 0.60	$9.53 (+1.78/-0)$
B - PowerBand [®]	< 180	$34^\circ \pm 1/2^\circ$	16.18 ± 0.13	14.73 ± 0.79	19.05 ± 0.60	$12.70 (+3.80/-0)$
	> 180	$38^\circ \pm 1/2^\circ$	16.51 ± 0.13	14.73 ± 0.79	19.05 ± 0.60	$12.70 (+3.80/-0)$
C - PowerBand [®]	< 200	$34^\circ \pm 1/2^\circ$	22.33 ± 0.18	19.81 ± 0.79	25.40 ± 0.60	$17.48 (+3.80/-0)$
	200 to 315	$36^\circ \pm 1/2^\circ$	22.53 ± 0.18	19.81 ± 0.79	25.40 ± 0.60	$17.48 (+3.80/-0)$
D - PowerBand [®]	> 315	$38^\circ \pm 1/2^\circ$	22.73 ± 0.18	19.81 ± 0.79	25.40 ± 0.60	$17.48 (+3.80/-0)$
	< 355	$34^\circ \pm 1/2^\circ$	31.98 ± 0.18	26.67 ± 0.79	36.53 ± 0.60	$22.23 (+6.35/-0)$
D - PowerBand [®]	355 to 450	$36^\circ \pm 1/2^\circ$	32.28 ± 0.18	26.67 ± 0.79	36.53 ± 0.60	$22.23 (+6.35/-0)$
	> 450	$38^\circ \pm 1/2^\circ$	32.59 ± 0.18	26.67 ± 0.79	36.53 ± 0.60	$22.23 (+6.35/-0)$

* Summation of the deviations from "e" for all grooves in any pulley shall not exceed ± 1.2 mm.

PULLEYS

Table No. 16 - Groove dimensions and tolerances for Super HC® PowerBand® according to ISO 5290 engineering standards

Section	Effective diameter mm	Groove angle a	go mm	d mm	e mm	f mm
9J PowerBand®	< 90	36° ± 1/4°	8.9 ± 0.13	8.9 (+0.25/-0)	10.3 ± 0.40	9 (+2.4/-0)
	90 to 150	38° ± 1/4°	8.9 ± 0.13	8.9 (+0.25/-0)	10.3 ± 0.40	9 (+2.4/-0)
	151 to 300	40° ± 1/4°	8.9 ± 0.13	8.9 (+0.25/-0)	10.3 ± 0.40	9 (+2.4/-0)
	> 300	42° ± 1/4°	8.9 ± 0.13	8.9 (+0.25/-0)	10.3 ± 0.40	9 (+2.4/-0)
15J PowerBand®	< 250	38° ± 1/4°	15.2 ± 0.13	15.2 (+0.25/-0)	17.5 ± 0.40	13 (+3.2/-0)
	250 to 400	40° ± 1/4°	15.2 ± 0.13	15.2 (+0.25/-0)	17.5 ± 0.40	13 (+3.2/-0)
	> 400	42° ± 1/4°	15.2 ± 0.13	15.2 (+0.25/-0)	17.5 ± 0.40	13 (+3.2/-0)
25J PowerBand®	< 400	38° ± 1/4°	25.4 ± 0.13	25.4 (+0.25/-0)	28.6 ± 0.40	19 (+6.3/-0)
	400 to 560	40° ± 1/4°	25.4 ± 0.13	25.4 (+0.25/-0)	28.6 ± 0.40	19 (+6.3/-0)
	> 560	42° ± 1/4°	25.4 ± 0.13	25.4 (+0.25/-0)	28.6 ± 0.40	19 (+6.3/-0)

* Summation of the deviations from "e" for all grooves in any pulley shall not exceed ± 0.5 mm for 9J and 15J, ± 0.8 mm for 25J.

Table No. 17 - Groove dimensions and tolerances for Super HC® PowerBand® according to RMA engineering standards

Section	Datum width mm	Effective diam. range mm	Groove angle α	go mm	d mm (minimum)	e mm	f mm	b mm
3V/3VX and PowerBand®	8.45	< 90	36° ± 1/4°	8.89 ± 0.13	8.6	10.32 ± 0.40	8.73 (+2.4/-0)	0.65
		90 to 150	38° ± 1/4°	8.89 ± 0.13	8.6	10.32 ± 0.40	8.73 (+2.4/-0)	0.65
		151 to 300	40° ± 1/4°	8.89 ± 0.13	8.6	10.32 ± 0.40	8.73 (+2.4/-0)	0.65
		> 300	42° ± 1/4°	8.89 ± 0.13	8.6	10.32 ± 0.40	8.73 (+2.4/-0)	0.65
5V/5VX and PowerBand®	14.4	< 250	38° ± 1/4°	15.24 ± 0.13	15.0	17.46 ± 0.40	12.7 (+3.2/-0)	1.25
		250 to 400	40° ± 1/4°	15.24 ± 0.13	15.0	17.46 ± 0.40	12.7 (+3.2/-0)	1.25
		> 400	42° ± 1/4°	15.24 ± 0.13	15.0	17.46 ± 0.40	12.7 (+3.2/-0)	1.25
8V/8VK and PowerBand®	23.65	< 400	38° ± 1/4°	25.4 ± 0.13	25.1	28.58 ± 0.40	19.05 (+6.3/-0)	2.54
		400 to 560	40° ± 1/4°	25.4 ± 0.13	25.1	28.58 ± 0.40	19.05 (+6.3/-0)	2.54
		> 560	42° ± 1/4°	25.4 ± 0.13	25.1	28.58 ± 0.40	19.05 (+6.3/-0)	2.54

* Summation of the deviations from "e" for all grooves in any pulley shall not exceed ± 0.79 mm.

Groove dimensions and tolerances for Super HC® PowerBand® according to the ISO 4183 engineering standards are shown in table No. 18 (SPB-PB/SPC-PB) on page 42.

52

PULLEYS

Table No. 18 - Groove dimensions and tolerances according to ISO 4183, DIN 2211 and DIN 2217 engineering standards

Belt section	Datum width lp mm	Datum diameter mm	Groove angle α	go mm	d mm	e* mm	f** mm	b mm
D*** mm	27	355 to 500 > 500	$36^\circ \pm 1/2^\circ$ $38^\circ \pm 1/2^\circ$	32 32	28 (min.) 28 (min.)	37 ± 0.60 37 ± 0.60	24 (± 2) 24 (± 2)	8.1 8.1
E*** mm	32	500 to 630 > 630	$36^\circ \pm 1/2^\circ$ $38^\circ \pm 1/2^\circ$	40 40	33 (min.) 33 (min.)	44.5 ± 0.70 44.5 ± 0.70	29 (± 2) 29 (± 2)	12 12
Z*** SPZ**** XPZ	8.5	63 to 80 > 80	$34^\circ \pm 1^\circ$ $38^\circ \pm 1^\circ$	9.72 9.88	11 (+0.25/-0) 11 (+0.25/-0)	12 ± 0.30 12 ± 0.30	8 \pm 0.6 8 \pm 0.6	2 2
A*** SPA**** XPA	11	90 to 118 > 118	$34^\circ \pm 1^\circ$ $38^\circ \pm 1^\circ$	12.68 12.89	13.75 (+0.25/-0) 13.75 (+0.25/-0)	15 ± 0.30 15 ± 0.30	10 \pm 0.6 10 \pm 0.6	2.75 2.75
B*** SPB**** SPB-PB XPB	14	140 to 190 > 190	$34^\circ \pm 1^\circ$ $38^\circ \pm 1^\circ$	16.14 16.41	17.5 (+0.25/-0) 17.5 (+0.25/-0)	19 ± 0.40 19 ± 0.40	12.5 \pm 0.8 12.5 \pm 0.8	3.5 3.5
C*** SPC**** SPC-PB XPC	19	224 to 315 > 315	$34^\circ \pm 1/2^\circ$ $38^\circ \pm 1/2^\circ$	21.94 22.31	24 (+0.25/-0) 24 (+0.25/-0)	25.5 ± 0.50 25.5 ± 0.50	17 \pm 1.0 17 \pm 1.0	4.8 4.8

Tolerances on datum diameters can be calculated by applying the tolerance (+ 1.6 /- 0%) to the nominal value of the datum diameter in mm.

* The use of higher values for dimension "e" can be justified in certain cases, for instance when pressed-sheet pulleys are applied. However, if a pulley should not be conform to the value "e", its use with a pulley made according to this recommendation may require caution. These pulleys should not be used in combination with PowerBand® belts. The tolerances on "e" apply to the distance between the axes of any two groove sections, whether consecutive or not.

** These tolerances have to be taken into account when aligning the pulleys.

*** According to DIN 2217.


**** According to DIN 2211 and ISO 4183.

Important


For PowerBands other than SPB-PB and SPC-PB, refer to tables 15 to 17 (pages 40 to 41).

2. GROOVE SPECIFICATIONS FOR MICRO-V® BELT PULLEYS

Figure 4 - Groove dimension nomenclature for Micro-V® belts

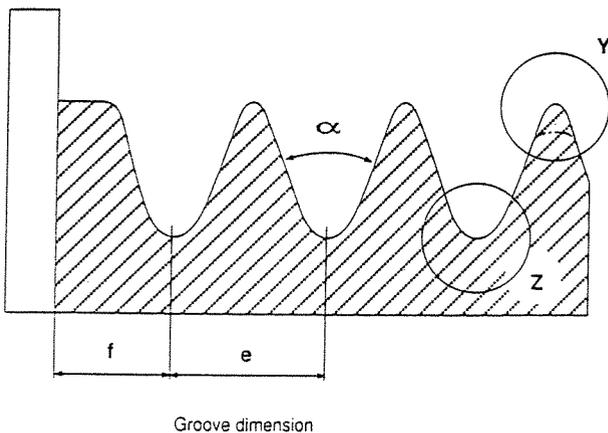


Detail Y: Groove top

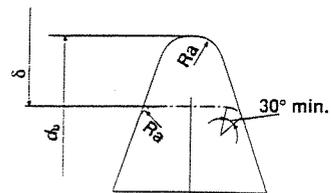

The design of the groove top may not exceed indicated minimum and maximum values (depending on pulley manufacture).

Detail Z: Groove bottom

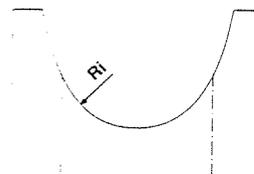

The groove bottom design may not exceed the indicated Ri value (depending on pulley manufacture).

PULLEYS


Table No. 19 - Groove dimensions and tolerances for Micro-V® according to DIN 7867 and ISO 9981 engineering standards

Section	Groove angle α	e mm *	Ri mm max.	Ra mm min.	f mm min.
PJ	$40 \pm 1/2^\circ$	2.34 ± 0.03	0.40	0.20	1.8
PL	$40 \pm 1/2^\circ$	4.70 ± 0.05	0.40	0.40	3.3
PM	$40 \pm 1/2^\circ$	9.40 ± 0.08	0.75	0.75	6.4

* Summation of the deviations from "e" for all grooves in any pulley shall not exceed ± 0.30 mm.

3. GROOVE SPECIFICATIONS FOR POLYFLEX® JB™ BELT PULLEYS

Figure 5 - Groove dimension nomenclature for Polyflex® JB™ belts

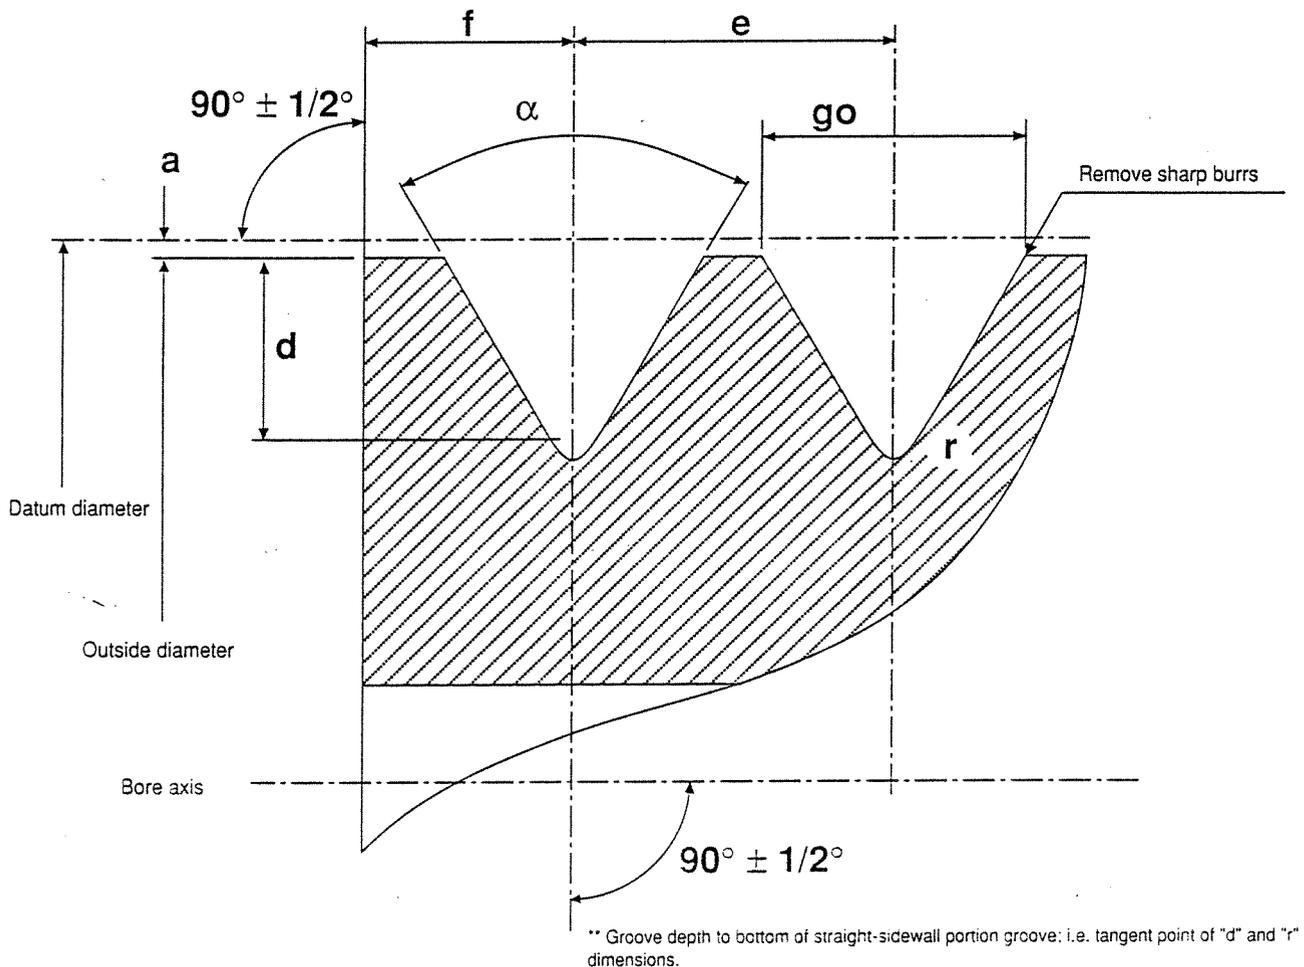

PULLEYS

Table No. 20 - Groove dimensions and tolerances for Polyflex® JB™

Groove designation	Outside diameter mm	Groove angle α	go mm	d** mm	e mm	f mm	r mm
5M-JB	26-32	60° ($\pm 1/4^\circ$)	4.50 (± 0.05 mm)	3.28	5.30 (+0.13/-0.05)	3.45	0.4
	33-97	62° ($\pm 1/4^\circ$)	4.50 (± 0.05 mm)	3.15	5.30 (+0.13/-0.05)	3.45	0.4
	>97	64° ($\pm 1/4^\circ$)	4.50 (± 0.05 mm)	3.05	5.30 (+0.13/-0.05)	3.45	0.4
7M-JB	42-76	60° ($\pm 1/4^\circ$)	7.10 (± 0.05 mm)	5.28	8.50 (+0.13/-0.05)	5.65	0.6
	>76	62° ($\pm 1/4^\circ$)	7.10 (± 0.05 mm)	5.08	8.50 (+0.13/-0.05)	5.65	0.6
11M-JB	67-117	60° ($\pm 1/4^\circ$)	11.20 (± 0.05 mm)	8.51	13.20 (+0.13/-0.05)	8.60	0.8
	>117	62° ($\pm 1/4^\circ$)	11.20 (± 0.05 mm)	8.20	13.20 (+0.13/-0.05)	8.60	0.8

NOTES

- The sides of the groove shall not exceed 3 micron (RMS) roughness.
- The summation of the deviations from "e" for all grooves in any pulley shall not exceed ± 0.38 mm.
- The tolerance on the outside diameter is:
 - 0.13 mm for pulleys with 26 mm up through 125 mm outside diameter;
 - 0.38 mm for pulleys with 126 mm up through 250 mm outside diameter;
 - 0.76 mm for pulleys with 251 mm up through 500 mm outside diameter;
 - 1.27 mm for pulleys with 501 mm outside diameter and more.
- Radial run-out shall not exceed 0.13 mm TIR* for outside diameters up through 250 mm.
Add 0.01 mm TIR* per 25 mm of outside diameter more than 250 mm.
- Axial run-out shall not exceed 0.03 mm TIR* per 25 mm of outside diameter for diameters up through 500 mm.
Add 0.01 mm TIR* per 25 mm of outside diameter for diameters more than 500 mm.

* TIR: Total Indicator Reading.

** Groove depth to bottom of straight-sidewall portion groove; i.e. tangent point of "d" and "r" dimensions.

IDLERS

IDLERS ON V-BELT DRIVES

An idler as used on V-belt drives, is a wheel that is not loaded and may be either a grooved or a flat pulley. Idlers are used on V-belt drives for various reasons:

1. To provide takeup for drives with fixed centre distance.
2. To clear obstructions.
3. To turn corners (as in mule pulley drives).
4. To break up long spans where belt vibration may be a problem.
5. To maintain tension.
6. To act as a clutching device.


Idlers always impose additional bending stresses on the belts. Therefore it is recommended to avoid idlers if possible. If needed at all in the drive, idler dimensions and locations should be designed for a minimum reduction of belt life.

PLACEMENT OF IDLERS ON THE DRIVE

Inside or outside idlers

Idlers may be placed either inside or outside the drive. An inside idler decreases the arc of contact on the adjacent pulleys. Inside idlers can be either grooved or flat for Hi-Power[®] MN V-belts, but are always grooved for Quad-Power II or Super HC[®] MN belts. Super HC[®] PowerBand[®] however will run satisfactorily with flat inside idlers, because the tie band will keep the individual belts from tipping.


Figure 6 - Inside idler

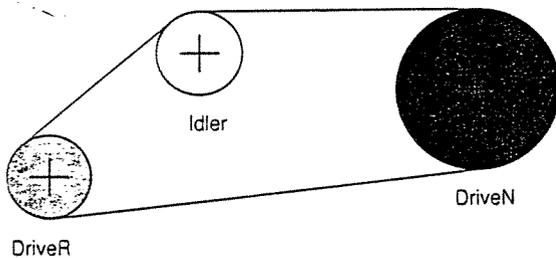

An outside idler increases the arc of contact but the amount of takeup is limited by the span on the opposite side. Outside idlers are always flat pulleys.

NOTE: the use of outside idlers is not recommended for Polyflex[®] JB[™] belt drives.

Figure 7 - Outside idler

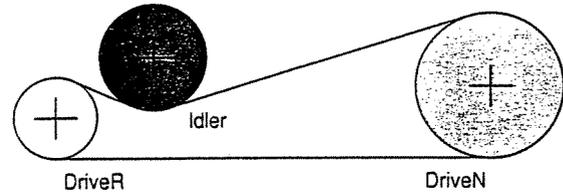

Tight or slack spans

Idlers should be placed, if at all possible, on the slack side of a drive, rather than on the tight side. Springloaded or weighted idlers should always be located on the slack side because the spring force, or weight, can be much less in this position. Also, such idlers should not be used on drives where the load can be reversed (i.e. where the slack side can become the tight side).

Figure 8 - Tight side idler


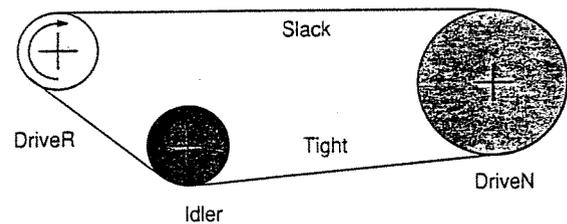


Figure 9 - Slack side idler

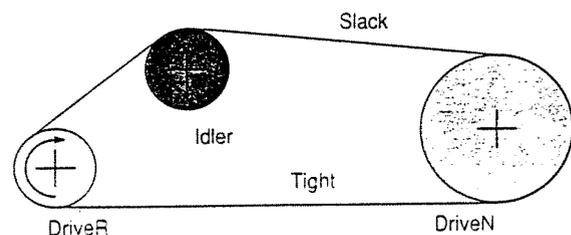


IDLERS

Location of the idler in the span


A grooved inside idler may be located at any point along the span, but preferably so that it results in nearly equal arcs of contact on the two adjacent pulleys.

Figure 10 - Equal arcs

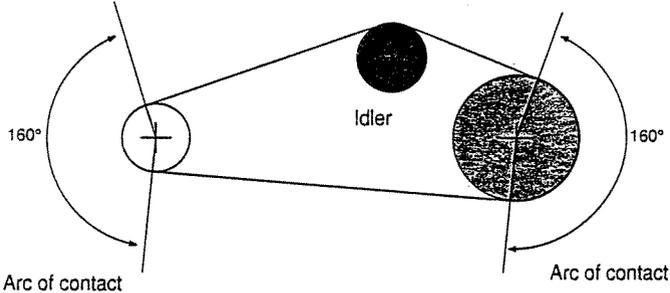

A flat idler pulley, whether it is inside or outside should be located as far as is practical from the next pulley the belt is entering. This is because V-belts move back and forth slightly on a flat pulley, and locating it as far away from the next pulley minimises the possibility of the belt entering that pulley in a misaligned condition. The use of flat idler pulleys on long span drives can cause severe belt whip, and should be avoided if possible.

Figure 11 - Locating flat idler

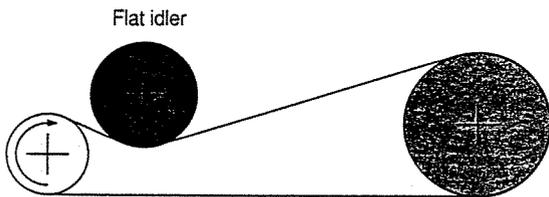

FURTHER INFORMATION

Idler diameters

Inside idlers should be at least as large as the smallest power transmitting pulley. Outside idlers should be at least 50% larger than the smallest power transmitting pulley. Belt power ratings or belt life are reduced significantly when using idlers that are too small.

Belt length

A drive using an idler should be laid out to scale, the extreme installation and takeup positions established and the length measured in each position. Make sure that the belt you select allows sufficient installation and takeup.

Flat idlers

Flat idlers for V-belt drives should not be crowned. Flanging of idlers, however, is good practice. If flanging is used, the inside bottom corners should not be rounded since this may cause the belt to climb off the pulley. A general rule to determine the face width of a flat idler (between the flanges if flanged) is to add 1.5 times the nominal belt top width to the face width of the grooved pulley used.

Reduction of power rating

As stated above, the use of an idler (or several idlers) will have its effect on belt performance. So for equal belt life power rating should be reduced. If the above recommendations are used, it is possible to design satisfactory V-belt drives using idlers by multiplying the normal rating by the following factor:

Number of idlers	Multiplier
1	0.91
2	0.86
3	0.81

These factors are approximate. They apply only when idler diameters are in accordance with the above recommendations. If power rating is not reduced to account for an idler, belt life will be reduced. Belt life and power rating are much more reduced, when too small idlers are used, as the extra bending stress increases with decrease in diameter.

POWER RATINGS QUAD-POWER II

Basic kW per belt

XPZ-3VX

RPM of faster shaft	56	60	63	67	71	75	80	85	90	95	100	106	112	118	125	132	140
585	0.47	0.55	0.61	0.69	0.77	0.85	0.95	1.05	1.15	1.25	1.35	1.47	1.59	1.70	1.84	1.98	2.13
700	0.54	0.64	0.71	0.81	0.91	1.00	1.12	1.24	1.36	1.47	1.59	1.73	1.87	2.01	2.17	2.33	2.51
725	0.56	0.66	0.74	0.84	0.93	1.03	1.15	1.28	1.40	1.52	1.64	1.78	1.93	2.07	2.24	2.40	2.59
870	0.65	0.77	0.86	0.98	1.10	1.21	1.36	1.50	1.65	1.79	1.93	2.11	2.28	2.44	2.64	2.84	3.06
950	0.70	0.83	0.93	1.06	1.18	1.31	1.47	1.63	1.78	1.94	2.09	2.28	2.46	2.65	2.86	3.07	3.32
1160	0.83	0.99	1.10	1.26	1.41	1.56	1.75	1.94	2.13	2.32	2.50	2.73	2.95	3.17	3.43	3.68	3.97
1450	1.00	1.19	1.34	1.52	1.71	1.90	2.13	2.37	2.60	2.83	3.06	3.33	3.60	3.87	4.18	4.49	4.85
1750	1.17	1.40	1.57	1.79	2.01	2.24	2.51	2.79	3.06	3.34	3.61	3.93	4.25	4.57	4.94	5.31	5.72
2850	1.72	2.08	2.34	2.69	3.04	3.38	3.81	4.24	4.66	5.07	5.48	5.97	6.46	6.94	7.49	8.03	8.64
3450	1.99	2.41	2.73	3.14	3.55	3.96	4.46	4.96	5.45	5.93	6.41	6.98	7.54	8.09	8.72	9.33	10.02
100	0.10	0.12	0.13	0.14	0.16	0.17	0.19	0.21	0.23	0.25	0.27	0.29	0.31	0.34	0.36	0.39	0.42
200	0.19	0.21	0.24	0.27	0.30	0.33	0.36	0.40	0.43	0.47	0.51	0.55	0.59	0.64	0.69	0.74	0.79
300	0.26	0.31	0.34	0.38	0.43	0.47	0.52	0.58	0.63	0.68	0.74	0.80	0.86	0.92	1.00	1.07	1.15
400	0.34	0.39	0.44	0.49	0.55	0.61	0.68	0.75	0.82	0.89	0.96	1.04	1.12	1.20	1.30	1.39	1.50
500	0.41	0.48	0.53	0.60	0.67	0.74	0.83	0.91	1.00	1.09	1.17	1.27	1.37	1.48	1.59	1.71	1.84
600	0.48	0.56	0.62	0.71	0.79	0.87	0.98	1.08	1.18	1.28	1.38	1.50	1.62	1.74	1.88	2.02	2.18
700	0.54	0.64	0.71	0.81	0.91	1.00	1.12	1.24	1.36	1.47	1.59	1.73	1.87	2.01	2.17	2.33	2.51
800	0.61	0.72	0.80	0.91	1.02	1.13	1.26	1.39	1.53	1.66	1.79	1.95	2.11	2.27	2.45	2.63	2.84
900	0.67	0.80	0.89	1.01	1.13	1.25	1.40	1.55	1.70	1.85	1.99	2.17	2.35	2.52	2.72	2.93	3.16
1000	0.74	0.87	0.97	1.11	1.24	1.37	1.54	1.70	1.87	2.03	2.19	2.39	2.58	2.77	3.00	3.22	3.47
1100	0.80	0.94	1.05	1.20	1.35	1.49	1.67	1.85	2.03	2.21	2.39	2.60	2.81	3.02	3.27	3.51	3.78
1200	0.86	1.02	1.14	1.30	1.45	1.61	1.81	2.00	2.20	2.39	2.58	2.81	3.04	3.27	3.53	3.79	4.09
1300	0.92	1.09	1.22	1.39	1.56	1.73	1.94	2.15	2.36	2.57	2.77	3.02	3.27	3.51	3.79	4.08	4.40
1400	0.97	1.16	1.30	1.48	1.66	1.84	2.07	2.29	2.52	2.74	2.96	3.23	3.49	3.75	4.05	4.36	4.70
1500	1.03	1.23	1.37	1.57	1.76	1.96	2.20	2.44	2.68	2.91	3.15	3.43	3.71	3.99	4.31	4.63	5.00
1600	1.09	1.30	1.45	1.66	1.87	2.07	2.33	2.58	2.83	3.08	3.33	3.63	3.93	4.22	4.56	4.90	5.29
1700	1.14	1.36	1.53	1.75	1.96	2.18	2.45	2.72	2.99	3.25	3.52	3.83	4.14	4.46	4.82	5.17	5.58
1800	1.20	1.43	1.60	1.83	2.06	2.29	2.58	2.86	3.14	3.42	3.70	4.03	4.36	4.68	5.06	5.44	5.87
1900	1.25	1.49	1.68	1.92	2.16	2.40	2.70	3.00	3.29	3.59	3.88	4.22	4.57	4.91	5.31	5.70	6.15
2000	1.30	1.56	1.75	2.01	2.26	2.51	2.82	3.13	3.44	3.75	4.05	4.42	4.78	5.14	5.55	5.96	6.43
2200	1.41	1.69	1.90	2.17	2.45	2.72	3.06	3.40	3.74	4.07	4.40	4.80	5.19	5.58	6.03	6.47	6.97
2400	1.51	1.81	2.04	2.34	2.63	2.93	3.30	3.66	4.03	4.39	4.74	5.17	5.59	6.01	6.49	6.97	7.50
2600	1.60	1.93	2.17	2.50	2.82	3.13	3.53	3.92	4.31	4.70	5.08	5.53	5.98	6.43	6.94	7.45	8.02
2800	1.70	2.05	2.31	2.65	2.99	3.33	3.76	4.17	4.59	5.00	5.40	5.89	6.36	6.84	7.38	7.92	8.52
3000	1.79	2.16	2.44	2.81	3.17	3.53	3.98	4.42	4.86	5.29	5.72	6.23	6.74	7.23	7.81	8.37	9.00
3200	1.88	2.28	2.57	2.96	3.34	3.72	4.19	4.66	5.12	5.58	6.03	6.57	7.10	7.62	8.22	8.81	9.46
3400	1.97	2.39	2.69	3.10	3.51	3.91	4.41	4.90	5.38	5.86	6.34	6.90	7.45	8.00	8.62	9.23	9.91
3600	2.06	2.49	2.82	3.25	3.67	4.09	4.61	5.13	5.64	6.14	6.63	7.22	7.79	8.36	9.00	9.64	10.34
3800	2.14	2.60	2.94	3.39	3.83	4.27	4.81	5.35	5.88	6.40	6.92	7.53	8.12	8.71	9.37	10.02	10.75
4000	2.22	2.70	3.05	3.52	3.99	4.45	5.01	5.57	6.12	6.66	7.20	7.83	8.44	9.05	9.73	10.40	11.13
4200	2.30	2.80	3.17	3.66	4.14	4.62	5.20	5.78	6.35	6.92	7.47	8.12	8.75	9.37	10.07	10.75	11.50
4400	2.38	2.89	3.28	3.79	4.29	4.78	5.39	5.99	6.58	7.16	7.73	8.39	9.05	9.68	10.40	11.09	11.84
4600	2.45	2.99	3.39	3.91	4.43	4.94	5.57	6.19	6.80	7.39	7.98	8.66	9.33	9.97	10.70	11.40	12.17
4800	2.52	3.08	3.49	4.03	4.57	5.10	5.75	6.39	7.01	7.62	8.22	8.92	9.60	10.26	10.99	11.70	12.46
5000	2.59	3.17	3.59	4.15	4.71	5.25	5.92	6.57	7.22	7.84	8.45	9.17	9.86	10.52	11.27	11.97	12.74
5200	2.66	3.25	3.69	4.27	4.84	5.40	6.08	6.76	7.41	8.05	8.68	9.40	10.10	10.77	11.52	12.23	12.99
5400	2.72	3.34	3.79	4.38	4.97	5.54	6.24	6.93	7.60	8.25	8.89	9.62	10.33	11.01	11.76	12.46	13.21
5600	2.79	3.41	3.88	4.49	5.09	5.68	6.40	7.10	7.78	8.45	9.09	9.83	10.54	11.22	11.97	12.67	13.41
5800	2.85	3.49	3.97	4.59	5.21	5.81	6.55	7.26	7.96	8.63	9.28	10.03	10.75	11.42	12.17	12.86	13.58
6000	2.90	3.57	4.05	4.69	5.32	5.94	6.69	7.42	8.12	8.80	9.46	10.21	10.93	11.61	12.34	13.02	13.72
6200	2.96	3.64	4.14	4.79	5.43	6.06	6.82	7.56	8.28	8.97	9.63	10.39	11.10	11.77	12.50	13.16	13.83
6400	3.01	3.70	4.22	4.88	5.54	6.18	6.95	7.70	8.42	9.12	9.78	10.54	11.26	11.92	12.63	13.27	13.91
6600	3.06	3.77	4.29	4.97	5.64	6.29	7.07	7.83	8.56	9.26	9.93	10.69	11.39	12.05	12.74	13.36	13.96
6800	3.11	3.83	4.36	5.06	5.73	6.39	7.19	7.96	8.69	9.40	10.06	10.82	11.51	12.16	12.83	13.42	13.98
7000	3.15	3.89	4.43	5.14	5.82	6.49	7.30	8.07	8.81	9.52	10.18	10.93	11.62	12.24	12.89	13.45	
7500	3.25	4.02	4.59	5.32	6.03	6.72	7.54	8.33	9.07	9.77	10.43	11.15	11.80	12.38	12.95		
8000	3.33	4.13	4.72	5.47	6.20	6.90	7.74	8.53	9.27	9.95	10.59	11.27	11.86	12.37			
8500	3.39	4.22	4.82	5.60	6.34	7.05	7.89	8.67	9.40	10.06	10.66	11.23	11.81				
9000	3.44	4.29	4.90	5.69	6.44	7.16	7.99	8.76	9.46	10.08	10.63	11.19					
10000	3.47	4.35	4.98	5.78	6.53	7.23	8.03	8.74	9.35	9.87							

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

$\frac{d \times \text{RPM}}{652316}$

6000 Hrs

$\frac{d \times \text{RPM}}{335458}$



POWER RATINGS QUAD-POWER II

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.2	1.21 to 1.28	1.29 to 1.44	>1.45	D - d / A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.00	180	1.00
700	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.07	0.10	174	0.99
725	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.20	169	0.97
870	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.30	163	0.96
950	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.40	157	0.94
1160	0.00	0.01	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.12	0.50	151	0.93
1450	0.00	0.02	0.03	0.05	0.06	0.08	0.10	0.11	0.13	0.15	0.60	145	0.91
1750	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.70	139	0.89
2850	0.00	0.03	0.06	0.10	0.13	0.16	0.19	0.22	0.25	0.29	0.80	133	0.87
3450	0.00	0.04	0.08	0.12	0.15	0.19	0.23	0.27	0.31	0.35	0.90	127	0.85
100	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	1.00	120	0.82
200	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	1.10	113	0.80
300	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	1.20	106	0.77
400	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	1.30	99	0.73
500	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	1.40	91	0.70
600	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.06	1.50	83	0.65
700	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.07			
800	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.07	0.08			
900	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09			
1000	0.00	0.01	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.10			
1100	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.09	0.10	0.11			
1200	0.00	0.01	0.03	0.04	0.05	0.07	0.08	0.09	0.11	0.12			
1300	0.00	0.01	0.03	0.04	0.06	0.07	0.09	0.10	0.12	0.13			
1400	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.12	0.14			
1500	0.00	0.02	0.03	0.05	0.07	0.08	0.10	0.12	0.13	0.15			
1600	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.12	0.14	0.16			
1700	0.00	0.02	0.04	0.06	0.08	0.09	0.11	0.13	0.15	0.17			
1800	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18			
1900	0.00	0.02	0.04	0.06	0.08	0.11	0.13	0.15	0.17	0.19			
2000	0.00	0.02	0.04	0.07	0.09	0.11	0.13	0.16	0.18	0.20			
2200	0.00	0.02	0.05	0.07	0.10	0.12	0.15	0.17	0.20	0.22			
2400	0.00	0.03	0.05	0.08	0.11	0.13	0.16	0.19	0.21	0.24			
2600	0.00	0.03	0.06	0.09	0.12	0.14	0.17	0.20	0.23	0.26			
2800	0.00	0.03	0.06	0.09	0.12	0.16	0.19	0.22	0.25	0.28			
3000	0.00	0.03	0.07	0.10	0.13	0.17	0.20	0.23	0.27	0.30			
3200	0.00	0.04	0.07	0.11	0.14	0.18	0.21	0.25	0.28	0.32			
3400	0.00	0.04	0.08	0.11	0.15	0.19	0.23	0.26	0.30	0.34			
3600	0.00	0.04	0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36			
3800	0.00	0.04	0.08	0.13	0.17	0.21	0.25	0.30	0.34	0.38			
4000	0.00	0.04	0.09	0.13	0.18	0.22	0.27	0.31	0.36	0.40			
4200	0.00	0.05	0.09	0.14	0.19	0.23	0.28	0.33	0.37	0.42			
4400	0.00	0.05	0.10	0.15	0.20	0.24	0.29	0.34	0.39	0.44			
4600	0.00	0.05	0.10	0.15	0.20	0.26	0.31	0.36	0.41	0.46			
4800	0.00	0.05	0.11	0.16	0.21	0.27	0.32	0.37	0.43	0.48			
5000	0.00	0.06	0.11	0.17	0.22	0.28	0.33	0.39	0.45	0.50			
5200	0.00	0.06	0.12	0.17	0.23	0.29	0.35	0.40	0.46	0.52			
5400	0.00	0.06	0.12	0.18	0.24	0.30	0.36	0.42	0.48	0.54			
5600	0.00	0.06	0.12	0.19	0.25	0.31	0.37	0.44	0.50	0.56			
5800	0.00	0.06	0.13	0.19	0.26	0.32	0.39	0.45	0.52	0.58			
6000	0.00	0.07	0.13	0.20	0.27	0.33	0.40	0.47	0.53	0.60			
6200	0.00	0.07	0.14	0.21	0.28	0.34	0.41	0.48	0.55	0.62			
6400	0.00	0.07	0.14	0.21	0.28	0.36	0.43	0.50	0.57	0.64			
6600	0.00	0.07	0.15	0.22	0.29	0.37	0.44	0.51	0.59	0.66			
6800	0.00	0.08	0.15	0.23	0.30	0.38	0.45	0.53	0.61	0.68			
7000	0.00	0.08	0.16	0.23	0.31	0.39	0.47	0.55	0.62	0.70			
7500	0.00	0.08	0.17	0.25	0.33	0.42	0.50	0.58	0.67	0.75			
8000	0.00	0.09	0.18	0.27	0.36	0.44	0.53	0.62	0.71	0.80			
8500	0.00	0.09	0.19	0.28	0.38	0.47	0.57	0.66	0.76	0.85			
9000	0.00	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90			
10000	0.00	0.11	0.22	0.33	0.45	0.56	0.67	0.78	0.89	1.00			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C_L	Belt ref.	RMA eff. length mm	Corr. factor C_L
XPZ-630	630	0.83	3VX-250	635	0.83
XPZ-670	670	0.84	3VX-265	675	0.84
XPZ-710	710	0.85	3VX-280	710	0.85
XPZ-750	750	0.86	3VX-300	760	0.86
XPZ-800	800	0.87	3VX-315	800	0.87
XPZ-850	850	0.88	3VX-335	850	0.88
XPZ-900	900	0.89	3VX-355	900	0.89
XPZ-950	950	0.90	3VX-375	955	0.91
XPZ-1000	1000	0.91	3VX-400	1015	0.92
XPZ-1060	1060	0.92	3VX-425	1080	0.93
XPZ-1120	1120	0.93	3VX-450	1145	0.94
XPZ-1180	1180	0.94	3VX-475	1205	0.95
XPZ-1250	1250	0.95	3VX-500	1270	0.96
XPZ-1320	1320	0.96	3VX-530	1345	0.97
XPZ-1400	1400	0.98	3VX-560	1420	0.98
XPZ-1500	1500	0.99	3VX-600	1525	0.99
XPZ-1600	1600	1.00	3VX-630	1600	1.00
XPZ-1700	1700	1.01	3VX-670	1700	1.01
XPZ-1800	1800	1.02	3VX-710	1805	1.02
XPZ-1900	1900	1.03	3VX-750	1905	1.03
XPZ-2000	2000	1.04	3VX-800	2030	1.04
XPZ-2120	2120	1.05	3VX-850	2160	1.05
XPZ-2240	2240	1.06	3VX-900	2285	1.07
XPZ-2360	2360	1.07	3VX-950	2415	1.08
XPZ-2500	2500	1.08	3VX-1000	2540	1.08
XPZ-2650	2650	1.09	3VX-1060	2690	1.09
XPZ-2800	2800	1.10	3VX-1120	2845	1.11
XPZ-3000	3000	1.11	3VX-1180	2995	1.11
XPZ-3150	3150	1.12	3VX-1250	3175	1.13
XPZ-3350	3350	1.13	3VX-1320	3355	1.14
XPZ-3550	3550	1.15	3VX-1400	3555	1.15

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$

POWER RATINGS QUAD-POWER II

Basic kW per belt

XPA

RPM of faster shaft	80	85	90	95	100	106	112	118	125	132	140	150	160	170	180	190	200
585	1.13	1.30	1.47	1.64	1.80	2.00	2.20	2.40	2.63	2.86	3.12	3.44	3.77	4.09	4.41	4.73	5.05
700	1.32	1.52	1.72	1.92	2.11	2.35	2.58	2.82	3.09	3.36	3.67	4.05	4.44	4.81	5.19	5.57	5.94
725	1.36	1.57	1.77	1.98	2.18	2.42	2.67	2.91	3.19	3.47	3.79	4.18	4.58	4.97	5.36	5.75	6.14
870	1.59	1.83	2.08	2.32	2.56	2.85	3.14	3.42	3.75	4.09	4.46	4.93	5.40	5.86	6.32	6.78	7.24
950	1.71	1.97	2.24	2.50	2.76	3.08	3.39	3.70	4.06	4.42	4.83	5.34	5.84	6.34	6.84	7.34	7.83
1160	2.02	2.34	2.66	2.97	3.29	3.67	4.04	4.41	4.85	5.28	5.77	6.38	6.98	7.58	8.18	8.77	9.36
1450	2.43	2.82	3.21	3.60	3.99	4.45	4.91	5.37	5.90	6.42	7.02	7.76	8.50	9.23	9.95	10.67	11.38
1750	2.83	3.30	3.76	4.22	4.68	5.23	5.77	6.31	6.94	7.56	8.26	9.14	10.00	10.85	11.70	12.53	13.36
2850	4.15	4.87	5.58	6.29	6.99	7.82	8.64	9.45	10.39	11.32	12.36	13.63	14.87	16.09	17.27	18.42	19.54
3450	4.77	5.61	6.45	7.27	8.09	9.05	10.01	10.94	12.02	13.07	14.25	15.68	17.06	18.39	19.67	20.89	22.06
100	0.24	0.27	0.31	0.34	0.37	0.41	0.45	0.48	0.53	0.57	0.62	0.68	0.74	0.80	0.87	0.93	0.99
200	0.45	0.51	0.57	0.63	0.69	0.76	0.84	0.91	0.99	1.08	1.17	1.29	1.41	1.53	1.65	1.76	1.88
300	0.64	0.73	0.82	0.91	0.99	1.10	1.21	1.31	1.44	1.56	1.70	1.87	2.05	2.22	2.39	2.56	2.73
400	0.82	0.93	1.05	1.17	1.29	1.43	1.57	1.70	1.87	2.03	2.21	2.44	2.66	2.89	3.11	3.34	3.56
500	0.99	1.14	1.28	1.43	1.57	1.74	1.91	2.08	2.28	2.48	2.71	2.99	3.27	3.54	3.82	4.10	4.37
600	1.16	1.33	1.50	1.67	1.84	2.05	2.25	2.45	2.69	2.93	3.19	3.53	3.86	4.19	4.51	4.84	5.17
700	1.32	1.52	1.72	1.92	2.11	2.35	2.58	2.82	3.09	3.36	3.67	4.05	4.44	4.81	5.19	5.57	5.94
800	1.48	1.70	1.93	2.15	2.38	2.64	2.91	3.18	3.48	3.79	4.14	4.57	5.00	5.43	5.86	6.29	6.71
900	1.63	1.89	2.14	2.39	2.64	2.93	3.23	3.53	3.87	4.21	4.60	5.08	5.56	6.04	6.52	6.99	7.46
1000	1.78	2.06	2.34	2.62	2.89	3.22	3.55	3.87	4.25	4.63	5.05	5.59	6.12	6.64	7.16	7.68	8.20
1100	1.93	2.24	2.54	2.84	3.14	3.50	3.86	4.21	4.62	5.04	5.50	6.08	6.66	7.23	7.80	8.37	8.93
1200	2.08	2.41	2.74	3.06	3.39	3.78	4.16	4.55	4.99	5.44	5.94	6.57	7.19	7.81	8.43	9.04	9.64
1300	2.22	2.58	2.93	3.28	3.63	4.05	4.46	4.88	5.36	5.84	6.38	7.05	7.72	8.39	9.04	9.70	10.35
1400	2.36	2.74	3.12	3.49	3.87	4.32	4.76	5.20	5.72	6.23	6.81	7.53	8.24	8.95	9.65	10.35	11.04
1500	2.50	2.90	3.31	3.71	4.11	4.58	5.06	5.53	6.07	6.62	7.23	8.00	8.75	9.51	10.25	10.99	11.72
1600	2.63	3.06	3.49	3.92	4.34	4.84	5.34	5.84	6.42	7.00	7.65	8.46	9.26	10.05	10.84	11.61	12.38
1700	2.77	3.22	3.67	4.12	4.57	5.10	5.63	6.16	6.77	7.37	8.06	8.91	9.76	10.59	11.41	12.23	13.04
1800	2.90	3.38	3.85	4.32	4.79	5.35	5.91	6.47	7.11	7.74	8.47	9.36	10.24	11.12	11.98	12.84	13.68
1900	3.03	3.53	4.03	4.52	5.02	5.61	6.19	6.77	7.44	8.11	8.87	9.80	10.73	11.64	12.54	13.43	14.31
2000	3.15	3.68	4.20	4.72	5.24	5.85	6.46	7.07	7.77	8.47	9.26	10.24	11.20	12.15	13.09	14.01	14.92
2100	3.28	3.83	4.37	4.92	5.45	6.10	6.73	7.37	8.10	8.83	9.65	10.66	11.66	12.65	13.62	14.58	15.52
2200	3.40	3.97	4.54	5.11	5.67	6.34	7.00	7.66	8.42	9.18	10.03	11.08	12.12	13.14	14.15	15.13	16.11
2300	3.52	4.12	4.71	5.30	5.88	6.57	7.26	7.95	8.74	9.52	10.40	11.49	12.57	13.62	14.66	15.68	16.68
2400	3.64	4.26	4.87	5.48	6.09	6.81	7.52	8.23	9.05	9.86	10.77	11.90	13.01	14.09	15.16	16.21	17.23
2500	3.76	4.40	5.03	5.67	6.29	7.04	7.78	8.51	9.36	10.19	11.14	12.30	13.44	14.56	15.65	16.73	17.77
2600	3.87	4.53	5.19	5.85	6.49	7.27	8.03	8.79	9.66	10.52	11.49	12.69	13.86	15.01	16.13	17.23	18.30
2700	3.98	4.67	5.35	6.02	6.69	7.49	8.28	9.06	9.96	10.84	11.84	13.07	14.27	15.45	16.60	17.72	18.81
2800	4.09	4.80	5.50	6.20	6.89	7.71	8.52	9.32	10.25	11.16	12.19	13.45	14.68	15.88	17.05	18.19	19.30
3000	4.31	5.06	5.80	6.54	7.27	8.14	9.00	9.84	10.82	11.78	12.85	14.17	15.46	16.70	17.92	19.09	20.23
3200	4.52	5.31	6.10	6.87	7.64	8.55	9.46	10.34	11.36	12.37	13.49	14.86	16.19	17.48	18.73	19.94	21.09
3400	4.72	5.55	6.38	7.19	8.00	8.96	9.90	10.83	11.89	12.93	14.10	15.52	16.89	18.22	19.49	20.71	21.88
3600	4.91	5.78	6.65	7.50	8.34	9.34	10.32	11.29	12.39	13.47	14.68	16.14	17.55	18.90	20.19	21.42	22.58
3800	5.10	6.01	6.91	7.80	8.68	9.71	10.73	11.73	12.87	13.99	15.23	16.72	18.16	19.53	20.82	22.05	23.20
4000	5.27	6.22	7.16	8.08	8.99	10.07	11.12	12.15	13.33	14.47	15.74	17.27	18.72	20.10	21.40	22.61	23.74
4200	5.44	6.43	7.40	8.36	9.30	10.41	11.49	12.55	13.76	14.93	16.23	17.77	19.24	20.61	21.90	23.09	24.18
4400	5.60	6.62	7.63	8.62	9.59	10.73	11.84	12.93	14.17	15.36	16.67	18.23	19.70	21.07	22.34	23.49	
4600	5.75	6.81	7.84	8.86	9.86	11.03	12.18	13.29	14.55	15.76	17.08	18.65	20.11	21.46	22.70		
4800	5.90	6.98	8.05	9.10	10.12	11.32	12.49	13.62	14.90	16.12	17.46	19.03	20.47	21.79			
5000	6.03	7.15	8.24	9.32	10.37	11.59	12.78	13.93	15.22	16.46	17.79	19.35	20.78	22.06			
5200	6.16	7.30	8.43	9.52	10.59	11.84	13.05	14.22	15.52	16.76	18.09	19.63	21.02				
5400	6.27	7.45	8.60	9.72	10.81	12.08	13.30	14.47	15.78	17.02	18.35	19.86					
5600	6.38	7.58	8.75	9.89	11.00	12.29	13.52	14.71	16.02	17.25	18.56	20.04					
5800	6.48	7.70	8.90	10.06	11.18	12.48	13.73	14.91	16.22	17.44	18.73						
6000	6.57	7.82	9.03	10.21	11.34	12.65	13.90	15.09	16.39	17.59	18.85						
6200	6.64	7.92	9.15	10.34	11.49	12.80	14.06	15.24	16.53	17.71							
6400	6.71	8.00	9.25	10.45	11.61	12.93	14.18	15.36	16.63	17.78							
6600	6.77	8.08	9.34	10.55	11.72	13.04	14.29	15.45	16.69								
6800	6.82	8.14	9.42	10.64	11.80	13.12	14.36	15.51	16.72								
7000	6.85	8.19	9.48	10.70	11.87	13.19	14.41	15.53									
7500	6.90	8.26	9.56	10.79	11.94	13.23	14.41										

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

12000 Hrs

6000 Hrs

0

$d \times \text{RPM}$
394633

$d \times \text{RPM}$
202922



POWER RATINGS QUAD-POWER II

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.2	1.21 to 1.28	1.29 to 1.44	>1.45	D - d / A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.12	0.14	0.00	180	1.00
700	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.14	0.16	0.10	174	0.99
725	0.00	0.02	0.04	0.06	0.07	0.09	0.11	0.13	0.15	0.17	0.20	169	0.97
870	0.00	0.02	0.04	0.07	0.09	0.11	0.13	0.16	0.18	0.20	0.30	163	0.96
950	0.00	0.02	0.05	0.07	0.10	0.12	0.15	0.17	0.20	0.22	0.40	157	0.94
1160	0.00	0.03	0.06	0.09	0.12	0.15	0.18	0.21	0.24	0.27	0.50	151	0.93
1450	0.00	0.04	0.07	0.11	0.15	0.19	0.22	0.26	0.30	0.34	0.60	145	0.91
1750	0.00	0.05	0.09	0.14	0.18	0.23	0.27	0.32	0.36	0.41	0.70	139	0.89
2850	0.00	0.07	0.15	0.22	0.29	0.37	0.44	0.51	0.59	0.66	0.80	133	0.87
3450	0.00	0.09	0.18	0.27	0.36	0.44	0.53	0.62	0.71	0.80	0.90	127	0.85
100	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	1.00	120	0.82
200	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	1.10	113	0.80
300	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.07	1.20	106	0.77
400	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	1.30	99	0.73
500	0.00	0.01	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.12	1.40	91	0.70
600	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.12	0.14	1.50	83	0.65
700	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.14	0.16			
800	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.17	0.19			
900	0.00	0.02	0.05	0.07	0.09	0.12	0.14	0.16	0.19	0.21			
1000	0.00	0.03	0.05	0.08	0.10	0.13	0.15	0.18	0.21	0.23			
1100	0.00	0.03	0.06	0.09	0.11	0.14	0.17	0.20	0.23	0.26			
1200	0.00	0.03	0.06	0.09	0.12	0.15	0.19	0.22	0.25	0.28			
1300	0.00	0.03	0.07	0.10	0.13	0.17	0.20	0.23	0.27	0.30			
1400	0.00	0.04	0.07	0.11	0.14	0.18	0.22	0.25	0.29	0.33			
1500	0.00	0.04	0.08	0.12	0.15	0.19	0.23	0.27	0.31	0.35			
1600	0.00	0.04	0.08	0.12	0.17	0.21	0.25	0.29	0.33	0.37			
1700	0.00	0.04	0.09	0.13	0.18	0.22	0.26	0.31	0.35	0.40			
1800	0.00	0.05	0.09	0.14	0.19	0.23	0.28	0.33	0.37	0.42			
1900	0.00	0.05	0.10	0.15	0.20	0.25	0.29	0.34	0.39	0.44			
2000	0.00	0.05	0.10	0.15	0.21	0.26	0.31	0.36	0.41	0.46			
2100	0.00	0.05	0.11	0.16	0.22	0.27	0.32	0.38	0.43	0.49			
2200	0.00	0.06	0.11	0.17	0.23	0.28	0.34	0.40	0.45	0.51			
2300	0.00	0.06	0.12	0.18	0.24	0.30	0.36	0.42	0.47	0.53			
2400	0.00	0.06	0.12	0.19	0.25	0.31	0.37	0.43	0.50	0.56			
2500	0.00	0.06	0.13	0.19	0.26	0.32	0.39	0.45	0.52	0.58			
2600	0.00	0.07	0.13	0.20	0.27	0.34	0.40	0.47	0.54	0.60			
2700	0.00	0.07	0.14	0.21	0.28	0.35	0.42	0.49	0.56	0.63			
2800	0.00	0.07	0.14	0.22	0.29	0.36	0.43	0.51	0.58	0.65			
3000	0.00	0.08	0.15	0.23	0.31	0.39	0.46	0.54	0.62	0.70			
3200	0.00	0.08	0.16	0.25	0.33	0.41	0.50	0.58	0.66	0.74			
3400	0.00	0.09	0.18	0.26	0.35	0.44	0.53	0.61	0.70	0.79			
3600	0.00	0.09	0.19	0.28	0.37	0.46	0.56	0.65	0.74	0.84			
3800	0.00	0.10	0.20	0.29	0.39	0.49	0.59	0.69	0.78	0.88			
4000	0.00	0.10	0.21	0.31	0.41	0.52	0.62	0.72	0.83	0.93			
4200	0.00	0.11	0.22	0.32	0.43	0.54	0.65	0.76	0.87	0.98			
4400	0.00	0.11	0.23	0.34	0.45	0.57	0.68	0.79	0.91	1.02			
4600	0.00	0.12	0.24	0.36	0.47	0.59	0.71	0.83	0.95	1.07			
4800	0.00	0.12	0.25	0.37	0.50	0.62	0.74	0.87	0.99	1.12			
5000	0.00	0.13	0.26	0.39	0.52	0.64	0.77	0.90	1.03	1.16			
5200	0.00	0.13	0.27	0.40	0.54	0.67	0.80	0.94	1.07	1.21			
5400	0.00	0.14	0.28	0.42	0.56	0.70	0.84	0.98	1.11	1.25			
5600	0.00	0.14	0.29	0.43	0.58	0.72	0.87	1.01	1.16	1.30			
5800	0.00	0.15	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35			
6000	0.00	0.16	0.31	0.46	0.62	0.77	0.93	1.08	1.24	1.39			
6200	0.00	0.16	0.32	0.48	0.64	0.80	0.96	1.12	1.28	1.44			
6400	0.00	0.17	0.33	0.49	0.66	0.83	0.99	1.16	1.32	1.49			
6600	0.00	0.17	0.34	0.51	0.68	0.85	1.02	1.19	1.36	1.53			
6800	0.00	0.18	0.35	0.53	0.70	0.88	1.05	1.23	1.40	1.58			
7000	0.00	0.18	0.36	0.54	0.72	0.90	1.08	1.26	1.45	1.63			
7500	0.00	0.19	0.39	0.58	0.77	0.97	1.16	1.35	1.55	1.74			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L
XPA-800	800	0.82
XPA-850	850	0.83
XPA-900	900	0.84
XPA-950	950	0.85
XPA-1000	1000	0.86
XPA-1060	1060	0.87
XPA-1120	1120	0.88
XPA-1180	1180	0.89
XPA-1250	1250	0.90
XPA-1320	1320	0.91
XPA-1400	1400	0.92
XPA-1500	1500	0.93
XPA-1600	1600	0.94
XPA-1700	1700	0.95
XPA-1800	1800	0.96
XPA-1900	1900	0.97
XPA-2000	2000	0.98
XPA-2120	2120	0.99
XPA-2240	2240	1.00
XPA-2360	2360	1.01
XPA-2500	2500	1.02
XPA-2650	2650	1.03
XPA-2800	2800	1.04
XPA-3000	3000	1.05
XPA-3150	3150	1.06
XPA-3350	3350	1.07
XPA-3550	3550	1.08

Number of belts required = $\frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$

POWER RATINGS QUAD-POWER II

Basic kW per belt

XPB-5VX

RPM of faster shaft	112	118	125	132	140	150	160	170	180	190	200	212	224	236	250	280	315
585	2.62	2.94	3.32	3.69	4.12	4.65	5.18	5.71	6.23	6.75	7.27	7.89	8.51	9.13	9.84	11.36	13.12
700	3.05	3.43	3.88	4.32	4.83	5.45	6.08	6.70	7.32	7.93	8.55	9.28	10.01	10.73	11.58	13.36	15.42
725	3.14	3.54	4.00	4.46	4.98	5.63	6.27	6.91	7.55	8.19	8.82	9.58	10.33	11.08	11.95	13.79	15.92
870	3.67	4.14	4.68	5.22	5.84	6.61	7.37	8.13	8.89	9.64	10.38	11.28	12.16	13.04	14.07	16.23	18.72
950	3.95	4.46	5.05	5.64	6.31	7.14	7.97	8.79	9.61	10.42	11.23	12.19	13.15	14.10	15.21	17.55	20.22
1160	4.67	5.28	5.99	6.70	7.50	8.50	9.49	10.47	11.45	12.42	13.39	14.54	15.68	16.81	18.12	20.88	24.02
1450	5.61	6.36	7.23	8.09	9.07	10.29	11.50	12.70	13.88	15.06	16.23	17.62	18.99	20.35	21.91	25.20	28.90
1750	6.53	7.42	8.44	9.46	10.62	12.05	13.47	14.88	16.27	17.64	19.00	20.61	22.20	23.76	25.56	29.29	33.43
2850	9.44	10.78	12.32	13.85	15.57	17.67	19.73	21.75	23.72	25.63	27.50	29.66	31.75	33.75	35.97		
3450	10.72	12.26	14.04	15.79	17.74	20.12	22.42	24.65	26.79	28.85	30.83	33.07					
100	0.56	0.62	0.69	0.76	0.84	0.94	1.04	1.14	1.24	1.34	1.44	1.56	1.68	1.80	1.94	2.23	2.57
200	1.03	1.15	1.28	1.42	1.58	1.77	1.96	2.16	2.35	2.54	2.73	2.96	3.19	3.41	3.68	4.24	4.89
300	1.47	1.64	1.84	2.04	2.27	2.55	2.84	3.12	3.40	3.68	3.96	4.29	4.63	4.96	5.34	6.16	7.11
400	1.89	2.11	2.38	2.64	2.94	3.31	3.68	4.05	4.42	4.78	5.15	5.59	6.02	6.45	6.96	8.03	9.27
500	2.29	2.57	2.89	3.21	3.58	4.04	4.50	4.95	5.41	5.86	6.31	6.85	7.38	7.91	8.53	9.85	11.37
600	2.67	3.01	3.39	3.78	4.21	4.76	5.30	5.84	6.37	6.91	7.44	8.08	8.71	9.34	10.07	11.63	13.42
700	3.05	3.43	3.88	4.32	4.83	5.45	6.08	6.70	7.32	7.93	8.55	9.28	10.01	10.73	11.58	13.36	15.42
800	3.42	3.85	4.36	4.86	5.43	6.14	6.84	7.55	8.25	8.94	9.64	10.46	11.28	12.10	13.05	15.06	17.38
900	3.78	4.26	4.82	5.38	6.02	6.81	7.60	8.38	9.16	9.93	10.70	11.62	12.54	13.44	14.50	16.73	19.29
1000	4.13	4.66	5.28	5.89	6.60	7.47	8.33	9.20	10.05	10.90	11.75	12.76	13.76	14.76	15.91	18.35	21.15
1100	4.47	5.05	5.73	6.40	7.16	8.11	9.06	10.00	10.93	11.86	12.78	13.88	14.97	16.05	17.30	19.94	22.96
1200	4.80	5.43	6.17	6.89	7.72	8.75	9.77	10.79	11.79	12.79	13.79	14.97	16.15	17.31	18.66	21.49	24.72
1300	5.13	5.81	6.60	7.38	8.27	9.37	10.47	11.56	12.64	13.71	14.78	16.05	17.30	18.55	19.98	23.01	26.43
1400	5.45	6.18	7.02	7.86	8.81	9.99	11.16	12.32	13.47	14.62	15.75	17.10	18.43	19.76	21.28	24.48	28.09
1500	5.77	6.54	7.44	8.33	9.34	10.59	11.84	13.07	14.29	15.50	16.70	18.13	19.54	20.94	22.54	25.91	29.69
1600	6.08	6.90	7.85	8.79	9.86	11.18	12.50	13.80	15.09	16.37	17.64	19.14	20.62	22.09	23.77	27.29	31.23
1700	6.38	7.25	8.25	9.24	10.37	11.77	13.15	14.52	15.88	17.22	18.55	20.13	21.68	23.21	24.97	28.64	32.72
1800	6.68	7.59	8.64	9.69	10.87	12.34	13.79	15.23	16.65	18.06	19.45	21.09	22.71	24.31	26.14	29.93	34.13
1900	6.97	7.92	9.03	10.12	11.36	12.90	14.42	15.92	17.41	18.87	20.32	22.03	23.72	25.37	27.26	31.18	35.49
2000	7.26	8.25	9.41	10.55	11.85	13.45	15.03	16.60	18.14	19.67	21.17	22.95	24.69	26.40	28.36	32.38	36.77
2100	7.53	8.57	9.78	10.97	12.32	13.99	15.64	17.26	18.87	20.45	22.00	23.84	25.64	27.40	29.41	33.53	37.99
2200	7.81	8.89	10.14	11.38	12.78	14.52	16.23	17.91	19.57	21.20	22.81	24.70	26.56	28.37	30.42	34.62	39.13
2300	8.08	9.20	10.50	11.78	13.24	15.04	16.80	18.55	20.26	21.94	23.60	25.54	27.44	29.30	31.40	35.66	40.19
2400	8.34	9.50	10.85	12.18	13.68	15.54	17.37	19.16	20.93	22.66	24.36	26.36	28.30	30.19	32.33	36.64	41.18
2500	8.59	9.80	11.19	12.57	14.12	16.04	17.92	19.77	21.58	23.36	25.10	27.14	29.13	31.05	33.22	37.56	
2600	8.84	10.09	11.52	12.94	14.55	16.52	18.45	20.35	22.21	24.04	25.82	27.90	29.92	31.87	34.06	38.43	
2700	9.09	10.37	11.85	13.31	14.96	16.99	18.98	20.92	22.83	24.69	26.51	28.63	30.67	32.65	34.86	39.22	
2800	9.32	10.64	12.17	13.67	15.37	17.45	19.49	21.48	23.42	25.32	27.17	29.32	31.40	33.39	35.61		
2900	9.56	10.91	12.48	14.02	15.76	17.89	19.98	22.01	24.00	25.93	27.81	29.99	32.09	34.09	36.31		
3000	9.78	11.18	12.78	14.37	16.15	18.33	20.46	22.53	24.56	26.52	28.42	30.63	32.74	34.75	36.97		
3100	10.00	11.43	13.08	14.70	16.52	18.75	20.92	23.04	25.09	27.08	29.01	31.23	33.35	35.36			
3200	10.21	11.68	13.36	15.02	16.88	19.16	21.37	23.52	25.60	27.62	29.56	31.80	33.92	35.93			
3300	10.42	11.92	13.64	15.33	17.23	19.55	21.80	23.98	26.10	28.13	30.09	32.34	34.46				
3400	10.62	12.15	13.91	15.64	17.57	19.93	22.22	24.43	26.56	28.62	30.59	32.84	34.95				
3500	10.81	12.38	14.17	15.93	17.90	20.30	22.62	24.86	27.01	29.08	31.06	33.30					
3600	11.00	12.59	14.42	16.22	18.22	20.65	23.00	25.26	27.44	29.51	31.49	33.73					
3700	11.18	12.80	14.67	16.49	18.52	20.99	23.37	25.65	27.84	29.92	31.90						
3800	11.35	13.01	14.90	16.75	18.82	21.31	23.71	26.02	28.21	30.30	32.27						
3900	11.52	13.20	15.13	17.00	19.10	21.62	24.05	26.36	28.56	30.65							
4000	11.68	13.39	15.34	17.25	19.36	21.92	24.36	26.68	28.89	30.97							
4200	11.97	13.74	15.74	17.70	19.86	22.46	24.93	27.26	29.46								
4400	12.24	14.05	16.11	18.10	20.30	22.93	25.42	27.75									
4600	12.48	14.33	16.43	18.46	20.69	23.34	25.83										
4800	12.68	14.57	16.71	18.77	21.02	23.68											
5000	12.86	14.78	16.95	19.03	21.29	23.95											
5200	13.00	14.95	17.14	19.24	21.51												
5400	13.10	15.08	17.29	19.39	21.65												
5600	13.18	15.17	17.39	19.49													
5800	13.21	15.22	17.44														
6000	13.21	15.23	17.44														

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

$\frac{d \times \text{RPM}}{246548}$

6000 Hrs

$\frac{d \times \text{RPM}}{126791}$



POWER RATINGS QUAD-POWER II

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	Speed Ratio										D - d A	Arc of contact on small pulley (degrees)	Factor G			
	1 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.2	1.21 to 1.28	1.29 to 1.44	>1.45						
585	0.00	0.03	0.07	0.10	0.13	0.17	0.20	0.23	0.27	0.30	0.00	180	1.00			
700	0.00	0.04	0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36	0.10	174	0.99			
725	0.00	0.04	0.08	0.12	0.16	0.21	0.25	0.29	0.33	0.37	0.20	169	0.97			
870	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.39	0.44	0.30	163	0.96			
950	0.00	0.05	0.11	0.16	0.22	0.27	0.32	0.38	0.43	0.48	0.40	157	0.94			
1160	0.00	0.07	0.13	0.20	0.26	0.33	0.39	0.46	0.53	0.59	0.50	151	0.93			
1450	0.00	0.08	0.16	0.25	0.33	0.41	0.49	0.58	0.66	0.74	0.60	145	0.91			
1750	0.00	0.10	0.20	0.30	0.40	0.50	0.59	0.69	0.79	0.89	0.70	139	0.89			
2850	0.00	0.16	0.32	0.48	0.65	0.81	0.97	1.13	1.29	1.45	0.80	133	0.87			
3450	0.00	0.20	0.39	0.59	0.78	0.98	1.17	1.37	1.56	1.76	0.90	127	0.85			
100	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.05	0.05	1.00	120	0.82			
200	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.10	1.10	113	0.80			
300	0.00	0.02	0.03	0.05	0.07	0.08	0.10	0.12	0.14	0.15	1.20	106	0.77			
400	0.00	0.02	0.05	0.07	0.09	0.11	0.14	0.16	0.18	0.20	1.30	99	0.73			
500	0.00	0.03	0.06	0.08	0.11	0.14	0.17	0.20	0.23	0.26	1.40	91	0.70			
600	0.00	0.03	0.07	0.10	0.14	0.17	0.20	0.24	0.27	0.31	1.50	83	0.65			
700	0.00	0.04	0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36						
800	0.00	0.05	0.09	0.14	0.18	0.23	0.27	0.32	0.36	0.41						
900	0.00	0.05	0.10	0.15	0.20	0.25	0.31	0.36	0.41	0.46						
1000	0.00	0.06	0.11	0.17	0.23	0.28	0.34	0.40	0.45	0.51						
1100	0.00	0.06	0.12	0.19	0.25	0.31	0.37	0.44	0.50	0.56						
1200	0.00	0.07	0.14	0.20	0.27	0.34	0.41	0.48	0.54	0.61						
1300	0.00	0.07	0.15	0.22	0.29	0.37	0.44	0.52	0.59	0.66						
1400	0.00	0.08	0.16	0.24	0.32	0.40	0.48	0.56	0.63	0.71						
1500	0.00	0.09	0.17	0.25	0.34	0.42	0.51	0.59	0.68	0.77						
1600	0.00	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.73	0.82	XPB-1250	1250	0.85	5VX-500	1270	0.85
1700	0.00	0.10	0.19	0.29	0.39	0.48	0.58	0.67	0.77	0.87	XPB-1260	1260	0.85	5VX-530	1345	0.86
1800	0.00	0.10	0.20	0.31	0.41	0.51	0.61	0.71	0.82	0.92	XPB-1320	1320	0.86	5VX-560	1420	0.87
1900	0.00	0.11	0.22	0.32	0.43	0.54	0.65	0.75	0.86	0.97	XPB-1340	1340	0.86	5VX-600	1525	0.88
2000	0.00	0.11	0.23	0.34	0.45	0.57	0.68	0.79	0.91	1.02	XPB-1400	1400	0.87	5VX-630	1600	0.89
2100	0.00	0.12	0.24	0.36	0.48	0.59	0.71	0.83	0.95	1.07	XPB-1410	1410	0.87	5VX-670	1700	0.90
2200	0.00	0.12	0.25	0.37	0.50	0.62	0.75	0.87	1.00	1.12	XPB-1500	1500	0.88	5VX-710	1805	0.91
2300	0.00	0.13	0.26	0.39	0.52	0.65	0.78	0.91	1.04	1.17	XPB-1510	1510	0.88	5VX-750	1905	0.92
2400	0.00	0.14	0.27	0.41	0.54	0.68	0.82	0.95	1.09	1.22	XPB-1590	1590	0.89	5VX-800	2030	0.93
2500	0.00	0.14	0.28	0.42	0.57	0.71	0.85	0.99	1.13	1.28	XPB-1600	1600	0.89	5VX-850	2160	0.94
2600	0.00	0.15	0.29	0.44	0.59	0.74	0.88	1.03	1.18	1.33	XPB-1690	1690	0.90	5VX-900	2285	0.95
2700	0.00	0.15	0.31	0.46	0.61	0.76	0.92	1.07	1.22	1.38	XPB-1700	1700	0.90	5VX-950	2415	0.96
2800	0.00	0.16	0.32	0.48	0.63	0.79	0.95	1.11	1.27	1.43	XPB-1800	1800	0.91	5VX-1000	2540	0.96
2900	0.00	0.16	0.33	0.49	0.66	0.82	0.99	1.15	1.32	1.48	XPB-1900	1900	0.92	5VX-1060	2690	0.97
3000	0.00	0.17	0.34	0.51	0.68	0.85	1.02	1.19	1.36	1.53	XPB-2000	2000	0.93	5VX-1120	2845	0.98
3100	0.00	0.18	0.35	0.53	0.70	0.88	1.05	1.23	1.41	1.58	XPB-2020	2020	0.93	5VX-1180	2995	0.99
3200	0.00	0.18	0.36	0.54	0.73	0.91	1.09	1.27	1.45	1.63	XPB-2120	2120	0.93	5VX-1250	3175	1.00
3300	0.00	0.19	0.37	0.56	0.75	0.93	1.12	1.31	1.50	1.68	XPB-2150	2150	0.94	5VX-1320	3355	1.01
3400	0.00	0.19	0.38	0.58	0.77	0.96	1.16	1.35	1.54	1.74	XPB-2240	2240	0.94	5VX-1400	3555	1.02
3500	0.00	0.20	0.40	0.59	0.79	0.99	1.19	1.39	1.59	1.79	XPB-2280	2280	0.95	5VX-1500	3810	1.03
3600	0.00	0.20	0.41	0.61	0.82	1.02	1.22	1.43	1.63	1.84	XPB-2360	2360	0.95	5VX-1600	4065	1.04
3700	0.00	0.21	0.42	0.63	0.84	1.05	1.26	1.47	1.68	1.89	XPB-2410	2410	0.96	5VX-1700	4320	1.05
3800	0.00	0.22	0.43	0.65	0.86	1.08	1.29	1.51	1.72	1.94	XPB-2500	2500	0.96	5VX-1800	4570	1.06
3900	0.00	0.22	0.44	0.66	0.88	1.10	1.33	1.55	1.77	1.99	XPB-2530	2530	0.96	5VX-1900	4825	1.07
4000	0.00	0.23	0.45	0.68	0.91	1.13	1.36	1.59	1.81	2.04	XPB-2650	2650	0.97	5VX-2000	5080	1.08
4200	0.00	0.24	0.48	0.71	0.95	1.19	1.43	1.67	1.90	2.14	XPB-2680	2680	0.97			
4400	0.00	0.25	0.50	0.75	1.00	1.25	1.50	1.75	2.00	2.25	XPB-2800	2800	0.98			
4600	0.00	0.26	0.52	0.78	1.04	1.30	1.56	1.82	2.09	2.35	XPB-2840	2840	0.98			
4800	0.00	0.27	0.54	0.82	1.09	1.36	1.63	1.90	2.18	2.45	XPB-2990	2990	0.99			
5000	0.00	0.28	0.57	0.85	1.13	1.42	1.70	1.98	2.27	2.55	XPB-3000	3000	0.99			
5200	0.00	0.30	0.59	0.88	1.18	1.47	1.77	2.06	2.36	2.65	XPB-3150	3150	1.00			
5400	0.00	0.31	0.61	0.92	1.22	1.53	1.84	2.14	2.45	2.76	XPB-3350	3350	1.01			
5600	0.00	0.32	0.63	0.95	1.27	1.59	1.90	2.22	2.54	2.86	XPB-3550	3550	1.02			
5800	0.00	0.33	0.66	0.99	1.32	1.64	1.97	2.30	2.63	2.96						
6000	0.00	0.34	0.68	1.02	1.36	1.70	2.04	2.38	2.72	3.06						

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C_L	Belt ref.	RMA eff. length mm	Corr. factor C_L
XPB-1250	1250	0.85	5VX-500	1270	0.85
XPB-1260	1260	0.85	5VX-530	1345	0.86
XPB-1320	1320	0.86	5VX-560	1420	0.87
XPB-1340	1340	0.86	5VX-600	1525	0.88
XPB-1400	1400	0.87	5VX-630	1600	0.89
XPB-1410	1410	0.87	5VX-670	1700	0.90
XPB-1500	1500	0.88	5VX-710	1805	0.91
XPB-1510	1510	0.88	5VX-750	1905	0.92
XPB-1590	1590	0.89	5VX-800	2030	0.93
XPB-1600	1600	0.89	5VX-850	2160	0.94
XPB-1690	1690	0.90	5VX-900	2285	0.95
XPB-1700	1700	0.90	5VX-950	2415	0.96
XPB-1800	1800	0.91	5VX-1000	2540	0.96
XPB-1900	1900	0.92	5VX-1060	2690	0.97
XPB-2000	2000	0.93	5VX-1120	2845	0.98
XPB-2020	2020	0.93	5VX-1180	2995	0.99
XPB-2120	2120	0.93	5VX-1250	3175	1.00
XPB-2150	2150	0.94	5VX-1320	3355	1.01
XPB-2240	2240	0.94	5VX-1400	3555	1.02
XPB-2280	2280	0.95	5VX-1500	3810	1.03
XPB-2360	2360	0.95	5VX-1600	4065	1.04
XPB-2410	2410	0.96	5VX-1700	4320	1.05
XPB-2500	2500	0.96	5VX-1800	4570	1.06
XPB-2530	2530	0.96	5VX-1900	4825	1.07
XPB-2650	2650	0.97	5VX-2000	5080	1.08
XPB-2680	2680	0.97			
XPB-2800	2800	0.98			
XPB-2840	2840	0.98			
XPB-2990	2990	0.99			
XPB-3000	3000	0.99			
XPB-3150	3150	1.00			
XPB-3350	3350	1.01			
XPB-3550	3550	1.02			

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$



POWER RATINGS QUAD-POWER II

Basic kW per belt

XPC

RPM of faster shaft	180	190	200	212	224	236	250	265	280	300	315	335	355	375	400	425	450
585	8,0	9,0	10,0	11,1	12,2	13,4	14,7	16,1	17,4	19,3	20,7	22,5	24,3	26,1	28,3	30,5	32,7
700	9,4	10,5	11,6	13,0	14,3	15,6	17,2	18,8	20,5	22,6	24,2	26,4	28,5	30,6	33,2	35,8	38,3
725	9,7	10,8	12,0	13,4	14,8	16,1	17,7	19,4	21,1	23,3	25,0	27,2	29,4	31,6	34,2	36,9	39,5
870	11,3	12,7	14,0	15,7	17,3	18,9	20,8	22,8	24,8	27,4	29,3	31,9	34,4	37,0	40,1	43,2	46,2
950	12,2	13,6	15,1	16,9	18,7	20,4	22,4	24,6	26,7	29,5	31,6	34,4	37,1	39,8	43,2	46,5	49,7
1160	14,3	16,1	17,9	20,0	22,1	24,2	26,6	29,1	31,6	35,0	37,4	40,7	43,9	47,0	50,9	54,6	58,3
1450	17,2	19,3	21,5	24,0	26,5	29,0	31,9	35,0	38,0	41,9	44,8	48,6	52,3	55,9	60,3	64,5	68,6
1750	19,8	22,4	24,9	27,8	30,8	33,6	37,0	40,4	43,9	48,3	51,6	55,8	59,8	63,7			
2850	27,4	31,0	34,4	38,5	42,4												
3450	29,8	33,7															
100	1,7	1,9	2,1	2,3	2,5	2,7	3,0	3,2	3,5	3,9	4,1	4,5	4,8	5,2	5,6	6,0	6,5
200	3,1	3,5	3,8	4,3	4,7	5,1	5,6	6,1	6,6	7,3	7,8	8,5	9,1	9,8	10,7	11,5	12,3
300	4,5	5,0	5,5	6,1	6,7	7,4	8,1	8,8	9,6	10,6	11,3	12,3	13,3	14,2	15,5	16,7	17,9
400	5,8	6,5	7,1	7,9	8,7	9,5	10,4	11,4	12,4	13,7	14,7	16,0	17,2	18,5	20,1	21,7	23,3
500	7,0	7,9	8,7	9,7	10,6	11,6	12,7	14,0	15,2	16,8	18,0	19,5	21,1	22,7	24,6	26,5	28,5
600	8,2	9,2	10,2	11,3	12,5	13,7	15,0	16,4	17,8	19,7	21,1	23,0	24,8	26,7	29,0	31,2	33,5
700	9,4	10,5	11,6	13,0	14,3	15,6	17,2	18,8	20,5	22,6	24,2	26,4	28,5	30,6	33,2	35,8	38,3
800	10,5	11,8	13,1	14,6	16,1	17,6	19,3	21,2	23,0	25,4	27,3	29,7	32,0	34,4	37,3	40,2	43,0
900	11,6	13,0	14,4	16,1	17,8	19,5	21,4	23,5	25,5	28,2	30,2	32,8	35,5	38,1	41,3	44,4	47,5
1000	12,7	14,2	15,8	17,6	19,5	21,3	23,4	25,7	27,9	30,9	33,0	35,9	38,8	41,6	45,1	48,5	51,8
1100	13,7	15,4	17,1	19,1	21,1	23,1	25,4	27,9	30,3	33,5	35,8	38,9	42,0	45,0	48,7	52,4	56,0
1200	14,7	16,6	18,4	20,6	22,7	24,9	27,3	30,0	32,6	36,0	38,5	41,8	45,1	48,3	52,3	56,1	59,9
1300	15,7	17,7	19,6	22,0	24,3	26,6	29,2	32,0	34,8	38,4	41,1	44,6	48,1	51,5	55,6	59,6	63,5
1400	16,7	18,8	20,9	23,3	25,8	28,2	31,0	34,0	36,9	40,8	43,6	47,3	50,9	54,5	58,8	63,0	67,0
1500	17,6	19,8	22,0	24,7	27,3	29,8	32,8	35,9	39,0	43,0	46,0	49,9	53,6	57,3	61,8	66,1	
1600	18,5	20,9	23,2	26,0	28,7	31,4	34,5	37,8	41,0	45,2	48,3	52,3	56,2	60,0	64,6		
1700	19,4	21,9	24,3	27,2	30,1	32,9	36,2	39,6	42,9	47,3	50,5	54,6	58,7	62,5			
1800	20,3	22,8	25,4	28,4	31,4	34,4	37,7	41,3	44,8	49,3	52,6	56,8	61,0				
1900	21,1	23,8	26,4	29,6	32,7	35,8	39,3	42,9	46,5	51,2	54,6	58,9					
2000	21,9	24,7	27,5	30,7	34,0	37,1	40,7	44,5	48,2	53,0	56,4						
2100	22,6	25,6	28,4	31,8	35,1	38,4	42,1	46,0	49,8	54,7	58,2						
2200	23,4	26,4	29,4	32,9	36,3	39,6	43,5	47,4	51,3	56,2							
2300	24,1	27,2	30,3	33,9	37,4	40,8	44,7	48,8	52,7								
2400	24,8	28,0	31,1	34,8	38,4	41,9	45,9	50,0									
2500	25,4	28,7	31,9	35,7	39,4	43,0	47,0	51,2									
2600	26,0	29,4	32,7	36,6	40,3	44,0	48,1										
2700	26,6	30,1	33,4	37,4	41,2	44,9											
2800	27,2	30,7	34,1	38,1	42,0	45,7											
2900	27,7	31,3	34,8	38,8	42,7												
3000	28,1	31,8	35,3	39,5													
3100	28,6	32,3	35,9	40,1													
3200	29,0	32,8	36,4														
3300	29,4	33,2	36,8														
3400	29,7	33,5															
3500	30,0	33,9															
3600	30,2																
3700	30,4																
3800																	
3900																	
4000																	
4200																	
4400																	
4600																	
4800																	
5000																	
5200																	
5400																	
5600																	
5800																	
6000																	

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

12000 Hrs

6000 Hrs

0

$\frac{d \times \text{RPM}}{135925}$

$\frac{d \times \text{RPM}}{69881}$



POWER RATINGS QUAD-POWER II

Additional kW per belt for speed ratio

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.2	1.21 to 1.28	1.29 to 1.44	>1.45
585	0	0,09	0,18	0,27	0,36	0,45	0,54	0,63	0,72	0,81
700	0	0,11	0,21	0,32	0,43	0,54	0,64	0,75	0,86	0,97
725	0	0,11	0,22	0,33	0,45	0,56	0,67	0,78	0,89	1,00
870	0	0,13	0,27	0,40	0,53	0,67	0,80	0,93	1,07	1,20
950	0	0,15	0,29	0,44	0,58	0,73	0,87	1,02	1,17	1,31
1160	0	0,18	0,36	0,53	0,71	0,89	1,07	1,25	1,42	1,60
1450	0	0,22	0,44	0,67	0,89	1,11	1,33	1,56	1,78	2,00
1750	0	0,27	0,54	0,80	1,07	1,34	1,61	1,88	2,15	2,42
2850	0	0,44	0,87	1,31	1,75	2,19	2,62	3,06	3,50	3,94
3450	0	0,53	1,06	1,59	2,12	2,65	3,18	3,71	4,24	4,77
50	0	0,01	0,02	0,02	0,03	0,04	0,05	0,05	0,06	0,07
100	0	0,02	0,03	0,05	0,06	0,08	0,09	0,11	0,12	0,14
150	0	0,02	0,05	0,07	0,09	0,12	0,14	0,16	0,18	0,21
200	0	0,03	0,06	0,09	0,12	0,15	0,18	0,21	0,25	0,28
250	0	0,04	0,08	0,11	0,15	0,19	0,23	0,27	0,31	0,35
300	0	0,05	0,09	0,14	0,18	0,23	0,28	0,32	0,37	0,41
350	0	0,05	0,11	0,16	0,21	0,27	0,32	0,38	0,43	0,48
400	0	0,06	0,12	0,18	0,25	0,31	0,37	0,43	0,49	0,55
450	0	0,07	0,14	0,21	0,28	0,35	0,41	0,48	0,55	0,62
500	0	0,08	0,15	0,23	0,31	0,38	0,46	0,54	0,61	0,69
550	0	0,08	0,17	0,25	0,34	0,42	0,51	0,59	0,68	0,76
600	0	0,09	0,18	0,28	0,37	0,46	0,55	0,64	0,74	0,83
650	0	0,10	0,20	0,30	0,40	0,50	0,60	0,70	0,80	0,90
700	0	0,11	0,21	0,32	0,43	0,54	0,64	0,75	0,86	0,97
750	0	0,12	0,23	0,34	0,46	0,58	0,69	0,81	0,92	1,04
800	0	0,12	0,25	0,37	0,49	0,61	0,74	0,86	0,98	1,11
850	0	0,13	0,26	0,39	0,52	0,65	0,78	0,91	1,04	1,17
900	0	0,14	0,28	0,41	0,55	0,69	0,83	0,97	1,11	1,24
950	0	0,15	0,29	0,44	0,58	0,73	0,87	1,02	1,17	1,31
1000	0	0,15	0,31	0,46	0,61	0,77	0,92	1,07	1,23	1,38
1050	0	0,16	0,32	0,48	0,64	0,81	0,97	1,13	1,29	1,45
1100	0	0,17	0,34	0,51	0,68	0,84	1,01	1,18	1,35	1,52
1150	0	0,18	0,35	0,53	0,71	0,88	1,06	1,24	1,41	1,59
1200	0	0,18	0,37	0,55	0,74	0,92	1,10	1,29	1,47	1,66
1250	0	0,19	0,38	0,57	0,77	0,96	1,15	1,34	1,53	1,73
1300	0	0,20	0,40	0,60	0,80	1,00	1,20	1,40	1,60	1,80
1350	0	0,21	0,41	0,62	0,83	1,04	1,24	1,45	1,66	1,87
1400	0	0,22	0,43	0,64	0,86	1,07	1,29	1,50	1,72	1,93
1450	0	0,22	0,44	0,67	0,89	1,11	1,33	1,56	1,78	2,00
1500	0	0,23	0,46	0,69	0,92	1,15	1,38	1,61	1,84	2,07
1550	0	0,24	0,48	0,71	0,95	1,19	1,43	1,66	1,90	2,14
1600	0	0,25	0,49	0,74	0,98	1,23	1,47	1,72	1,96	2,21
1650	0	0,25	0,51	0,76	1,01	1,27	1,52	1,77	2,03	2,28
1700	0	0,26	0,52	0,78	1,04	1,30	1,56	1,83	2,09	2,35
1750	0	0,27	0,54	0,80	1,07	1,34	1,61	1,88	2,15	2,42
1800	0	0,28	0,55	0,83	1,11	1,38	1,66	1,93	2,21	2,49
1850	0	0,28	0,57	0,85	1,14	1,42	1,70	1,99	2,27	2,56
1900	0	0,29	0,58	0,87	1,17	1,46	1,75	2,04	2,33	2,63
1950	0	0,30	0,60	0,90	1,20	1,50	1,79	2,09	2,39	2,70
2000	0	0,31	0,61	0,92	1,23	1,53	1,84	2,15	2,46	2,76
2050	0	0,32	0,63	0,94	1,26	1,57	1,89	2,20	2,52	2,83
2100	0	0,32	0,64	0,97	1,29	1,61	1,93	2,26	2,58	2,90
2150	0	0,33	0,66	0,99	1,32	1,65	1,98	2,31	2,64	2,97
2200	0	0,34	0,67	1,01	1,35	1,69	2,02	2,36	2,70	3,04
2250	0	0,35	0,69	1,03	1,38	1,73	2,07	2,42	2,76	3,11
2300	0	0,35	0,70	1,06	1,41	1,76	2,12	2,47	2,82	3,18
2350	0	0,36	0,72	1,08	1,44	1,80	2,16	2,52	2,89	3,25
2400	0	0,37	0,74	1,10	1,47	1,84	2,21	2,58	2,95	3,32
2450	0	0,38	0,75	1,13	1,50	1,88	2,25	2,63	3,01	3,39
2500	0	0,38	0,77	1,15	1,54	1,92	2,30	2,69	3,07	3,46

Arc of contact correction factor G

D - d A	Arc of contact on small pulley (degrees)	Factor G
0.00	180	1.00
0.10	174	0.99
0.20	169	0.97
0.30	163	0.96
0.40	157	0.94
0.50	151	0.93
0.60	145	0.91
0.70	139	0.89
0.80	133	0.87
0.90	127	0.85
1.00	120	0.82
1.10	113	0.80
1.20	106	0.77
1.30	99	0.73
1.40	91	0.70
1.50	83	0.65

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L	Belt ref.	RMA eff. length mm	Corr. factor C _L
XPC2000	2000	0,90			
XPC2120	2120	0,91			
XPC2240	2240	0,92			
XPC2360	2360	0,93			
XPC2500	2500	0,94			
XPC2650	2650	0,95			
XPC2800	2800	0,96			
XPC3000	3000	0,97			
XPC3150	3150	0,98			
XPC3350	3350	0,99			
XPC3550	3550	1,00			
XPC3750	3750	1,00			
XPC4000	4000	1,01			
XPC4250	4250	1,02			
XPC4500	4500	1,03			

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$

6

POWER RATINGS SUPER HC® MN / SUPER HC®

Basic kW per belt or rib

SPZ-3V-9J

All values printed in italics are for use with Super HC® Moulded Notch construction only.

RPM of faster shaft	56	60	63	67	71	75	80	85	90	95	100	106	112	118	125	132	140
585	0.38	0.45	0.50	0.57	0.60	0.67	0.77	0.87	0.96	1.06	1.15	1.27	1.38	1.49	1.62	1.75	1.90
700	0.43	0.51	0.57	0.65	0.69	0.78	0.90	1.01	1.12	1.24	1.35	1.48	1.62	1.75	1.90	2.05	2.23
725	0.44	0.52	0.59	0.67	0.71	0.81	0.93	1.04	1.16	1.28	1.39	1.53	1.67	1.80	1.96	2.12	2.30
870	0.50	0.60	0.67	0.77	0.83	0.94	1.08	1.22	1.36	1.49	1.63	1.79	1.95	2.12	2.30	2.49	2.70
950	0.53	0.64	0.72	0.83	0.89	1.01	1.16	1.31	1.46	1.61	1.76	1.94	2.11	2.29	2.49	2.69	2.92
1160	0.61	0.74	0.83	0.96	1.05	1.19	1.37	1.55	1.73	1.91	2.09	2.30	2.51	2.72	2.96	3.20	3.47
1450	0.70	0.86	0.97	1.13	1.25	1.43	1.65	1.87	2.09	2.31	2.52	2.78	3.04	3.29	3.59	3.88	4.21
1750	0.79	0.97	1.11	1.29	1.45	1.66	1.92	2.18	2.44	2.70	2.95	3.26	3.56	3.85	4.20	4.54	4.92
2850	1.03	1.32	1.53	1.81	2.08	2.40	2.80	3.19	3.58	3.96	4.34	4.79	5.23	5.66	6.15	6.64	7.18
3450	1.13	1.47	1.72	2.05	2.36	2.74	3.20	3.65	4.10	4.54	4.97	5.48	5.98	6.46	7.01	7.54	8.12
100	0.10	0.11	0.12	0.13	0.13	0.15	0.17	0.18	0.20	0.22	0.24	0.26	0.28	0.30	0.33	0.35	0.38
200	0.17	0.19	0.21	0.24	0.24	0.27	0.30	0.34	0.37	0.41	0.44	0.49	0.53	0.57	0.62	0.67	0.72
300	0.23	0.27	0.30	0.33	0.34	0.38	0.43	0.48	0.54	0.59	0.64	0.70	0.76	0.82	0.89	0.96	1.04
400	0.28	0.33	0.37	0.42	0.43	0.49	0.56	0.62	0.69	0.76	0.82	0.90	0.98	1.06	1.15	1.25	1.35
500	0.34	0.40	0.44	0.50	0.52	0.59	0.67	0.76	0.84	0.92	1.00	1.10	1.20	1.30	1.41	1.52	1.65
600	0.38	0.46	0.51	0.58	0.61	0.69	0.79	0.89	0.98	1.08	1.18	1.29	1.41	1.52	1.66	1.79	1.94
700	0.43	0.51	0.57	0.65	0.69	0.78	0.90	1.01	1.12	1.24	1.35	1.48	1.62	1.75	1.90	2.05	2.23
800	0.47	0.56	0.63	0.72	0.77	0.88	1.01	1.13	1.26	1.39	1.52	1.67	1.82	1.97	2.14	2.31	2.51
900	0.51	0.61	0.69	0.79	0.85	0.97	1.11	1.25	1.40	1.54	1.68	1.84	2.02	2.21	2.39	2.57	2.78
1000	0.55	0.66	0.75	0.86	0.93	1.06	1.21	1.37	1.53	1.68	1.84	2.00	2.20	2.40	2.60	2.81	3.05
1100	0.59	0.71	0.80	0.92	1.00	1.14	1.31	1.49	1.66	1.83	2.00	2.20	2.40	2.60	2.83	3.06	3.32
1200	0.62	0.75	0.85	0.98	1.08	1.23	1.41	1.60	1.78	1.97	2.15	2.37	2.58	2.80	3.05	3.30	3.58
1300	0.65	0.80	0.90	1.04	1.15	1.31	1.51	1.71	1.91	2.10	2.30	2.54	2.77	3.00	3.27	3.53	3.83
1400	0.68	0.84	0.95	1.10	1.22	1.39	1.60	1.82	2.03	2.24	2.45	2.70	2.95	3.19	3.48	3.76	4.08
1500	0.72	0.88	1.00	1.16	1.29	1.47	1.70	1.92	2.15	2.37	2.60	2.86	3.13	3.39	3.69	3.99	4.33
1600	0.74	0.92	1.04	1.21	1.35	1.55	1.79	2.03	2.27	2.51	2.74	3.02	3.30	3.58	3.90	4.21	4.57
1700	0.77	0.95	1.09	1.27	1.42	1.62	1.88	2.13	2.38	2.63	2.88	3.18	3.47	3.76	4.10	4.43	4.81
1800	0.80	0.99	1.13	1.32	1.48	1.70	1.97	2.23	2.50	2.76	3.02	3.33	3.64	3.94	4.30	4.65	5.04
1900	0.83	1.03	1.17	1.37	1.54	1.77	2.05	2.33	2.61	2.89	3.16	3.48	3.81	4.12	4.49	4.86	5.27
2000	0.85	1.06	1.22	1.42	1.61	1.84	2.14	2.43	2.72	3.01	3.29	3.63	3.97	4.30	4.68	5.06	5.49
2100	0.88	1.09	1.26	1.47	1.67	1.91	2.22	2.53	2.83	3.13	3.43	3.78	4.13	4.47	4.87	5.26	5.71
2200	0.90	1.13	1.30	1.52	1.72	1.98	2.30	2.62	2.93	3.25	3.56	3.92	4.28	4.64	5.06	5.46	5.92
2300	0.92	1.16	1.33	1.57	1.78	2.05	2.38	2.71	3.04	3.36	3.68	4.06	4.44	4.81	5.24	5.66	6.13
2400	0.94	1.19	1.37	1.61	1.84	2.12	2.46	2.80	3.14	3.48	3.81	4.20	4.59	4.97	5.41	5.84	6.33
2500	0.97	1.22	1.41	1.66	1.89	2.18	2.54	2.89	3.24	3.59	3.93	4.34	4.74	5.13	5.58	6.03	6.53
2600	0.99	1.25	1.44	1.70	1.95	2.25	2.62	2.98	3.34	3.70	4.05	4.47	4.88	5.29	5.75	6.21	6.72
2700	1.01	1.28	1.48	1.75	2.00	2.31	2.69	3.07	3.44	3.81	4.17	4.60	5.02	5.44	5.92	6.38	6.91
2800	1.02	1.30	1.51	1.79	2.05	2.37	2.76	3.15	3.53	3.91	4.28	4.73	5.16	5.59	6.08	6.55	7.09
2900	1.04	1.33	1.55	1.83	2.10	2.43	2.83	3.23	3.63	4.01	4.40	4.85	5.29	5.73	6.23	6.72	7.26
3000	1.06	1.36	1.58	1.87	2.15	2.49	2.90	3.31	3.72	4.11	4.51	4.97	5.43	5.87	6.38	6.88	7.43
3100	1.08	1.38	1.61	1.91	2.20	2.55	2.97	3.39	3.81	4.21	4.62	5.09	5.55	6.01	6.53	7.03	7.59
3200	1.09	1.41	1.64	1.95	2.25	2.60	3.04	3.47	3.89	4.31	4.72	5.20	5.68	6.14	6.67	7.18	7.75
3300	1.11	1.43	1.67	1.99	2.29	2.66	3.10	3.54	3.98	4.40	4.82	5.32	5.80	6.27	6.81	7.33	7.90
3400	1.13	1.46	1.70	2.03	2.34	2.71	3.17	3.62	4.06	4.50	4.92	5.43	5.92	6.40	6.94	7.47	8.05
3500	1.14	1.48	1.73	2.07	2.38	2.76	3.23	3.69	4.14	4.58	5.02	5.53	6.03	6.52	7.07	7.60	8.19
3600	1.15	1.50	1.76	2.11	2.42	2.81	3.29	3.76	4.22	4.67	5.12	5.64	6.14	6.64	7.19	7.73	8.32
3700	1.17	1.53	1.79	2.14	2.47	2.86	3.35	3.83	4.30	4.76	5.21	5.74	6.25	6.75	7.31	7.85	8.44
3800	1.18	1.55	1.82	2.18	2.51	2.91	3.41	3.89	4.37	4.84	5.30	5.83	6.35	6.86	7.42	7.97	8.56
3900	1.20	1.57	1.85	2.21	2.54	2.96	3.46	3.96	4.44	4.92	5.38	5.92	6.45	6.96	7.53	8.08	8.67
4000	1.21	1.59	1.87	2.25	2.58	3.00	3.51	4.02	4.51	4.99	5.47	6.01	6.55	7.06	7.64	8.18	8.78
4100	1.22	1.61	1.90	2.28	2.62	3.04	3.57	4.08	4.58	5.07	5.55	6.10	6.64	7.16	7.73	8.28	8.87
4200	1.23	1.63	1.93	2.32	2.65	3.09	3.62	4.14	4.65	5.14	5.62	6.18	6.73	7.25	7.83	8.37	8.96
4300	1.24	1.65	1.95	2.35	2.69	3.13	3.67	4.19	4.71	5.21	5.70	6.26	6.81	7.33	7.91	8.46	9.04
4400	1.25	1.67	1.98	2.38	2.72	3.17	3.71	4.25	4.77	5.28	5.77	6.34	6.89	7.41	7.99	8.54	9.12
4500	1.26	1.69	2.00	2.41	2.75	3.20	3.76	4.30	4.83	5.34	5.84	6.41	6.96	7.49	8.07	8.61	9.18
4600	1.27	1.70	2.02	2.45	2.78	3.24	3.80	4.35	4.88	5.40	5.90	6.48	7.03	7.56	8.14	8.68	9.24
4700	1.28	1.72	2.05	2.48	2.81	3.27	3.84	4.40	4.94	5.46	5.96	6.54	7.10	7.62	8.20	8.74	9.29
4800	1.29	1.74	2.07	2.51	2.83	3.31	3.88	4.44	4.99	5.51	6.02	6.61	7.16	7.69	8.26	8.79	9.33
4900	1.30	1.75	2.09	2.54	2.86	3.34	3.92	4.49	5.04	5.57	6.08	6.66	7.22	7.74	8.31	8.83	9.37
5000	1.31	1.77	2.11	2.57	2.88	3.37	3.96	4.53	5.08	5.62	6.13	6.72	7.27	7.79	8.35	8.87	9.39

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

$\frac{d \times \text{RPM}}{589971}$

6000 Hrs

$\frac{d \times \text{RPM}}{303490}$



POWER RATINGS SUPER HC® MN / SUPER HC®

Additional kW per belt or rib for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.05	1.06 to 1.11	1.12 to 1.18	1.19 to 1.26	1.27 to 1.38	1.39 to 1.57	1.58 to 1.94	1.95 to 3.38	>3.39
585	0.00	0.01	0.02	0.04	0.05	0.07	0.08	0.09	0.09	0.10
700	0.00	0.01	0.03	0.05	0.06	0.08	0.09	0.10	0.11	0.12
725	0.00	0.01	0.03	0.05	0.07	0.08	0.10	0.11	0.12	0.12
870	0.00	0.01	0.03	0.06	0.08	0.10	0.11	0.13	0.14	0.15
950	0.00	0.01	0.04	0.06	0.09	0.11	0.12	0.14	0.15	0.16
1160	0.00	0.02	0.05	0.08	0.11	0.13	0.15	0.17	0.19	0.20
1450	0.00	0.02	0.06	0.10	0.13	0.16	0.19	0.21	0.23	0.25
1750	0.00	0.03	0.07	0.12	0.16	0.20	0.23	0.26	0.28	0.30
2850	0.00	0.04	0.11	0.19	0.26	0.32	0.37	0.42	0.46	0.49
3450	0.00	0.05	0.13	0.23	0.32	0.39	0.45	0.51	0.56	0.59
100	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02
200	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03
300	0.00	0.00	0.01	0.02	0.03	0.03	0.04	0.04	0.05	0.05
400	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.06	0.07
500	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.08	0.09
600	0.00	0.01	0.02	0.04	0.06	0.07	0.08	0.09	0.10	0.10
700	0.00	0.01	0.03	0.05	0.06	0.08	0.09	0.10	0.11	0.12
800	0.00	0.01	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.14
900	0.00	0.01	0.04	0.06	0.08	0.10	0.12	0.13	0.15	0.15
1000	0.00	0.01	0.04	0.07	0.09	0.11	0.13	0.15	0.16	0.17
1100	0.00	0.02	0.04	0.07	0.10	0.12	0.14	0.16	0.18	0.19
1200	0.00	0.02	0.05	0.08	0.11	0.13	0.16	0.18	0.19	0.20
1300	0.00	0.02	0.05	0.09	0.12	0.15	0.17	0.19	0.21	0.22
1400	0.00	0.02	0.05	0.10	0.13	0.16	0.18	0.21	0.23	0.24
1500	0.00	0.02	0.06	0.10	0.14	0.17	0.20	0.22	0.24	0.26
1600	0.00	0.02	0.06	0.11	0.15	0.18	0.21	0.24	0.26	0.27
1700	0.00	0.02	0.07	0.12	0.16	0.19	0.22	0.25	0.27	0.29
1800	0.00	0.03	0.07	0.12	0.17	0.20	0.24	0.27	0.29	0.31
1900	0.00	0.03	0.07	0.13	0.18	0.21	0.25	0.28	0.31	0.32
2000	0.00	0.03	0.08	0.14	0.19	0.22	0.26	0.30	0.32	0.34
2100	0.00	0.03	0.08	0.14	0.19	0.24	0.28	0.31	0.34	0.36
2200	0.00	0.03	0.09	0.15	0.20	0.25	0.29	0.33	0.35	0.38
2300	0.00	0.03	0.09	0.16	0.21	0.26	0.30	0.34	0.37	0.39
2400	0.00	0.03	0.09	0.16	0.22	0.27	0.32	0.36	0.39	0.41
2500	0.00	0.04	0.10	0.17	0.23	0.28	0.33	0.37	0.40	0.43
2600	0.00	0.04	0.10	0.18	0.24	0.29	0.34	0.38	0.42	0.44
2700	0.00	0.04	0.11	0.18	0.25	0.30	0.36	0.40	0.44	0.46
2800	0.00	0.04	0.11	0.19	0.26	0.31	0.37	0.41	0.45	0.48
2900	0.00	0.04	0.11	0.20	0.27	0.33	0.38	0.43	0.47	0.50
3000	0.00	0.04	0.12	0.20	0.28	0.34	0.39	0.44	0.48	0.51
3100	0.00	0.04	0.12	0.21	0.29	0.35	0.41	0.46	0.50	0.53
3200	0.00	0.05	0.12	0.22	0.30	0.36	0.42	0.47	0.52	0.55
3300	0.00	0.05	0.13	0.22	0.31	0.37	0.43	0.49	0.53	0.56
3400	0.00	0.05	0.13	0.23	0.32	0.38	0.45	0.50	0.55	0.58
3500	0.00	0.05	0.14	0.24	0.32	0.39	0.46	0.52	0.56	0.60
3600	0.00	0.05	0.14	0.25	0.33	0.40	0.47	0.53	0.58	0.61
3700	0.00	0.05	0.14	0.25	0.34	0.42	0.49	0.55	0.60	0.63
3800	0.00	0.05	0.15	0.26	0.35	0.43	0.50	0.56	0.61	0.65
3900	0.00	0.06	0.15	0.27	0.36	0.44	0.51	0.58	0.63	0.67
4000	0.00	0.06	0.16	0.27	0.37	0.45	0.53	0.59	0.64	0.68
4100	0.00	0.06	0.16	0.28	0.38	0.46	0.54	0.61	0.66	0.70
4200	0.00	0.06	0.16	0.29	0.39	0.47	0.55	0.62	0.68	0.72
4300	0.00	0.06	0.17	0.29	0.40	0.48	0.57	0.64	0.69	0.73
4400	0.00	0.06	0.17	0.30	0.41	0.49	0.58	0.65	0.71	0.75
4500	0.00	0.06	0.18	0.31	0.42	0.51	0.59	0.67	0.73	0.77
4600	0.00	0.07	0.18	0.31	0.43	0.52	0.60	0.68	0.74	0.79
4700	0.00	0.07	0.18	0.32	0.44	0.53	0.62	0.70	0.76	0.80
4800	0.00	0.07	0.19	0.33	0.44	0.54	0.63	0.71	0.77	0.82
4900	0.00	0.07	0.19	0.33	0.45	0.55	0.64	0.73	0.79	0.84
5000	0.00	0.07	0.20	0.34	0.46	0.56	0.66	0.74	0.81	0.85

D - d A	Arc of contact on small pulley (degrees)	Factor G
0.00	180	1.00
0.10	174	0.99
0.20	169	0.97
0.30	163	0.96
0.40	157	0.94
0.50	151	0.93
0.60	145	0.91
0.70	139	0.89
0.80	133	0.87
0.90	127	0.85
1.00	120	0.82
1.10	113	0.80
1.20	106	0.77
1.30	99	0.73
1.40	91	0.70
1.50	83	0.65

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L	Belt ref.	RMA effective length mm	Corr. factor C _L
SPZ-560	560	0.81	3V-250	635	0.83
SPZ-600	600	0.82	3V-265	675	0.84
SPZ-630	630	0.83	3V-280	710	0.85
SPZ-670	670	0.84	3V-300	760	0.86
SPZ-710	710	0.85	3V-315	800	0.87
SPZ-750	750	0.86	3V-335	850	0.88
SPZ-800	800	0.87	3V-355	900	0.89
SPZ-850	850	0.88	3V-375	955	0.91
SPZ-900	900	0.89	3V-400	1015	0.92
SPZ-950	950	0.90	3V-425	1080	0.93
SPZ-1000	1000	0.91	3V-450	1145	0.94
SPZ-1060	1060	0.92	3V-475	1205	0.95
SPZ-1120	1120	0.93	3V-500	1270	0.96
SPZ-1180	1180	0.94	3V-530	1345	0.97
SPZ-1250	1250	0.95	3V-560	1420	0.98
SPZ-1320	1320	0.96	3V-600	1525	0.99
SPZ-1400	1400	0.98	3V-630	1600	1.00
SPZ-1500	1500	0.99	3V-670	1700	1.01
SPZ-1600	1600	1.00	3V-710	1805	1.02
SPZ-1700	1700	1.01	3V-750	1905	1.03
SPZ-1800	1800	1.02	3V-800	2030	1.04
SPZ-1900	1900	1.03	3V-850	2160	1.05
SPZ-2000	2000	1.04	3V-900	2285	1.07
SPZ-2120	2120	1.05	3V-950	2415	1.08
SPZ-2240	2240	1.06	3V-1000	2540	1.08
SPZ-2360	2360	1.07	3V-1060	2690	1.09
SPZ-2500	2500	1.08	3V-1120	2845	1.11
SPZ-2650	2650	1.09	3V-1180	2995	1.11
SPZ-2800	2800	1.10	3V-1250	3175	1.13
SPZ-3000	3000	1.11	3V-1320	3355	1.14
SPZ-3150	3150	1.12	3V-1400	3555	1.15
SPZ-3350	3350	1.13			
SPZ-3550	3550	1.15			

The sizes printed in colour are available as 9J PowerBand®.

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$



POWER RATINGS SUPER HC[®] MN / SUPER HC[®]

SPA

Basic kW per belt

All values printed in italics are for use with Super HC[®] Moulded Notch construction only.

RPM of faster shaft	80	85	90	95	100	106	112	118	125	132	140	150	160	170	180	190	200
585	0.83	0.97	1.11	1.24	1.35	1.53	1.72	1.91	2.13	2.35	2.59	2.90	3.21	3.51	3.81	4.11	4.41
700	0.94	1.10	1.26	1.43	1.56	1.78	2.01	2.23	2.48	2.74	3.03	3.39	3.75	4.11	4.46	4.82	5.17
725	0.96	1.13	1.30	1.46	1.61	1.84	2.07	2.29	2.56	2.82	3.12	3.50	3.87	4.24	4.60	4.97	5.33
870	1.08	1.28	1.48	1.68	1.86	2.14	2.41	2.68	2.99	3.30	3.66	4.10	4.53	4.96	5.40	5.82	6.25
950	1.15	1.36	1.58	1.79	2.00	2.30	2.59	2.88	3.22	3.56	3.94	4.42	4.89	5.36	5.82	6.28	6.74
1160	1.30	1.56	1.81	2.07	2.34	2.70	3.05	3.40	3.80	4.21	4.66	5.23	5.79	6.35	6.90	7.44	7.98
1450	1.49	1.80	2.11	2.42	2.79	3.22	3.65	4.07	4.57	5.05	5.61	6.29	6.97	7.63	8.29	8.94	9.59
1750	1.66	2.03	2.39	2.75	3.21	3.72	4.22	4.72	5.30	5.87	6.51	7.31	8.09	8.86	9.62	10.36	11.09
2850	2.11	2.67	3.22	3.77	4.46	5.21	5.95	6.67	7.50	8.31	9.21	10.30	11.35	12.35	13.31	14.22	15.08
3450	2.27	2.92	3.58	4.22	4.93	5.78	6.61	7.42	8.34	9.22	10.20	11.36	12.44	13.46	14.39	15.25	16.02
100	0.22	0.25	0.27	0.30	0.30	0.33	0.37	0.41	0.45	0.49	0.54	0.60	0.66	0.72	0.78	0.83	0.89
200	0.37	0.43	0.48	0.53	0.54	0.61	0.68	0.75	0.83	0.91	1.00	1.12	1.23	1.34	1.46	1.57	1.68
300	0.51	0.59	0.66	0.74	0.77	0.87	0.97	1.07	1.19	1.31	1.44	1.61	1.77	1.94	2.10	2.26	2.42
400	0.63	0.73	0.83	0.93	0.98	1.11	1.25	1.38	1.53	1.68	1.86	2.07	2.29	2.50	2.72	2.93	3.14
500	0.74	0.86	0.98	1.10	1.18	1.34	1.51	1.67	1.86	2.05	2.26	2.53	2.79	3.05	3.32	3.58	3.84
600	0.84	0.99	1.13	1.27	1.37	1.57	1.76	1.95	2.18	2.40	2.65	2.97	3.28	3.59	3.90	4.20	4.51
700	0.94	1.10	1.26	1.43	1.56	1.78	2.01	2.23	2.48	2.74	3.03	3.39	3.75	4.11	4.46	4.82	5.17
800	1.03	1.21	1.39	1.58	1.74	1.99	2.24	2.49	2.78	3.07	3.40	3.81	4.21	4.62	5.02	5.41	5.81
900	1.11	1.31	1.52	1.72	1.91	2.20	2.48	2.75	3.08	3.40	3.76	4.22	4.67	5.11	5.56	6.00	6.43
1000	1.19	1.41	1.63	1.86	2.08	2.39	2.70	3.01	3.36	3.72	4.12	4.61	5.11	5.60	6.08	6.56	7.04
1100	1.26	1.51	1.75	1.99	2.25	2.59	2.92	3.25	3.64	4.03	4.46	5.00	5.54	6.07	6.60	7.12	7.63
1200	1.33	1.60	1.86	2.12	2.41	2.77	3.14	3.50	3.91	4.33	4.80	5.38	5.96	6.53	7.10	7.66	8.21
1300	1.40	1.68	1.96	2.24	2.56	2.96	3.34	3.73	4.18	4.62	5.13	5.75	6.37	6.98	7.58	8.18	8.77
1400	1.46	1.76	2.06	2.36	2.72	3.13	3.55	3.96	4.44	4.91	5.45	6.11	6.77	7.42	8.06	8.69	9.32
1500	1.52	1.84	2.16	2.48	2.86	3.31	3.75	4.19	4.69	5.19	5.76	6.47	7.16	7.85	8.52	9.19	9.85
1600	1.58	1.92	2.25	2.59	3.01	3.48	3.94	4.40	4.94	5.47	6.07	6.81	7.54	8.26	8.97	9.67	10.36
1700	1.63	1.99	2.35	2.70	3.14	3.64	4.13	4.62	5.18	5.74	6.37	7.15	7.91	8.67	9.41	10.14	10.85
1800	1.69	2.06	2.43	2.80	3.28	3.80	4.31	4.83	5.42	6.00	6.66	7.47	8.27	9.06	9.83	10.59	11.33
1900	1.74	2.13	2.52	2.91	3.41	3.96	4.49	5.03	5.64	6.25	6.94	7.79	8.62	9.44	10.24	11.02	11.79
2000	1.78	2.20	2.60	3.01	3.54	4.11	4.67	5.23	5.87	6.50	7.22	8.10	8.96	9.80	10.63	11.44	12.22
2100	1.83	2.26	2.68	3.11	3.66	4.25	4.84	5.42	6.08	6.74	7.48	8.39	9.28	10.16	11.01	11.84	12.64
2200	1.87	2.32	2.76	3.20	3.78	4.40	5.00	5.60	6.29	6.98	7.74	8.68	9.60	10.50	11.37	12.22	13.04
2300	1.91	2.38	2.84	3.30	3.90	4.53	5.16	5.78	6.50	7.20	7.99	8.96	9.90	10.82	11.71	12.58	13.42
2400	1.95	2.43	2.91	3.39	4.01	4.67	5.32	5.96	6.69	7.42	8.23	9.23	10.19	11.13	12.04	12.92	13.77
2500	1.99	2.49	2.98	3.48	4.12	4.80	5.47	6.13	6.89	7.63	8.47	9.48	10.47	11.43	12.36	13.25	14.11
2600	2.03	2.54	3.05	3.56	4.22	4.92	5.61	6.29	7.07	7.83	8.69	9.73	10.74	11.71	12.65	13.55	14.42
2700	2.06	2.59	3.12	3.65	4.32	5.04	5.75	6.45	7.25	8.03	8.90	9.97	10.99	11.98	12.93	13.84	14.70
2800	2.09	2.64	3.19	3.73	4.41	5.15	5.88	6.60	7.42	8.22	9.11	10.19	11.23	12.23	13.19	14.10	14.96
2900	2.12	2.69	3.25	3.81	4.51	5.26	6.01	6.74	7.58	8.39	9.30	10.40	11.46	12.47	13.43	14.34	15.20
3000	2.15	2.74	3.32	3.89	4.59	5.37	6.13	6.88	7.73	8.57	9.49	10.60	11.67	12.69	13.65	14.56	15.41
3100	2.18	2.78	3.38	3.97	4.68	5.47	6.25	7.01	7.88	8.73	9.67	10.79	11.87	12.89	13.85	14.75	15.59
3200	2.21	2.82	3.44	4.04	4.75	5.57	6.36	7.14	8.02	8.88	9.83	10.97	12.05	13.07	14.03	14.93	15.75
3300	2.23	2.87	3.49	4.12	4.83	5.66	6.46	7.26	8.15	9.02	9.99	11.13	12.22	13.24	14.19	15.08	15.88
3400	2.26	2.91	3.55	4.19	4.90	5.74	6.56	7.37	8.28	9.16	10.13	11.29	12.37	13.39	14.33	15.20	15.98
3500	2.28	2.94	3.60	4.26	4.96	5.82	6.66	7.47	8.39	9.29	10.26	11.42	12.51	13.52	14.45	15.30	16.05
3600	2.30	2.98	3.66	4.33	5.02	5.90	6.74	7.57	8.50	9.40	10.39	11.55	12.63	13.63	14.55	15.37	16.09
3700	2.32	3.02	3.71	4.39	5.08	5.96	6.82	7.66	8.60	9.51	10.50	11.66	12.74	13.72	14.62	15.41	16.10
3800		3.05	3.76	4.46	5.13	6.03	6.90	7.74	8.69	9.61	10.60	11.76	12.83	13.80	14.67	15.43	16.08
3900		3.08	3.81	4.52	5.18	6.09	6.97	7.82	8.78	9.69	10.68	11.84	12.90	13.85	14.69	15.42	
4000		3.12	3.85	4.59	5.22	6.14	7.03	7.89	8.85	9.77	10.76	11.91	12.95	13.88	14.69	15.38	
100	3.15	3.90	4.65	5.26	6.19	7.08	7.95	8.92	9.83	10.82	11.96	12.99	13.89	14.67			
200	3.18	3.94	4.71	5.29	6.23	7.13	8.00	8.97	9.89	10.87	12.00	13.00	13.88	14.62			
300		3.99	4.77	5.31	6.26	7.17	8.05	9.02	9.93	10.91	12.02	13.00	13.84				
400		4.03	4.82	5.33	6.29	7.21	8.08	9.06	9.97	10.94	12.03	12.98					
500		4.07	4.88	5.35	6.31	7.23	8.11	9.08	9.99	10.95	12.02	12.94					
600			4.93	5.36	6.33	7.25	8.13	9.10	10.00	10.95	11.99	12.88					
700			4.99	5.37	6.34	7.27	8.14	9.11	10.00	10.93	11.95	12.80					
800				5.37	6.34	7.27	8.15	9.11	9.99	10.90	11.89						
900					6.34	7.27	8.14	9.09	9.96	10.86	11.81						
1000						7.26	8.13	9.07	9.93	10.80	11.72						

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

d x RPM
361664

6000 Hrs

d x RPM
185977



POWER RATINGS SUPER HC[®] MN / SUPER HC[®]

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.05	1.06 to 1.11	1.12 to 1.18	1.19 to 1.26	1.27 to 1.38	1.39 to 1.57	1.58 to 1.94	1.95 to 3.38	>3.39	D - d / A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.02	0.05	0.09	0.13	0.15	0.18	0.20	0.22	0.23	0.00	180	1.00
700	0.00	0.02	0.06	0.11	0.15	0.18	0.21	0.24	0.26	0.28	0.10	174	0.99
725	0.00	0.02	0.07	0.11	0.16	0.19	0.22	0.25	0.27	0.29	0.20	169	0.97
870	0.00	0.03	0.08	0.14	0.19	0.23	0.27	0.30	0.33	0.35	0.30	163	0.96
950	0.00	0.03	0.09	0.15	0.20	0.25	0.29	0.33	0.36	0.38	0.40	157	0.94
1160	0.00	0.04	0.11	0.18	0.25	0.30	0.35	0.40	0.43	0.46	0.50	151	0.93
1450	0.00	0.05	0.13	0.23	0.31	0.38	0.44	0.50	0.54	0.58	0.60	145	0.91
1750	0.00	0.06	0.16	0.28	0.38	0.46	0.53	0.60	0.66	0.69	0.70	139	0.89
2850	0.00	0.09	0.26	0.45	0.61	0.74	0.87	0.98	1.07	1.13	0.80	133	0.87
3450	0.00	0.11	0.31	0.55	0.74	0.90	1.05	1.19	1.29	1.37	0.90	127	0.85
100	0.00	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	1.00	120	0.82
200	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.08	1.10	113	0.80
300	0.00	0.01	0.03	0.05	0.06	0.08	0.09	0.10	0.11	0.12	1.20	106	0.77
400	0.00	0.01	0.04	0.06	0.09	0.10	0.12	0.14	0.15	0.16	1.30	99	0.73
500	0.00	0.02	0.05	0.08	0.11	0.13	0.15	0.17	0.19	0.20	1.40	91	0.70
600	0.00	0.02	0.05	0.09	0.13	0.16	0.18	0.21	0.22	0.24	1.50	83	0.65
700	0.00	0.02	0.06	0.11	0.15	0.18	0.21	0.24	0.26	0.28			
800	0.00	0.03	0.07	0.13	0.17	0.21	0.24	0.28	0.30	0.32			
900	0.00	0.03	0.08	0.14	0.19	0.23	0.28	0.31	0.34	0.36			
1000	0.00	0.03	0.09	0.16	0.22	0.26	0.31	0.34	0.37	0.40			
1100	0.00	0.04	0.10	0.17	0.24	0.29	0.34	0.38	0.41	0.44			
1200	0.00	0.04	0.11	0.19	0.26	0.31	0.37	0.41	0.45	0.48			
1300	0.00	0.04	0.12	0.21	0.28	0.34	0.40	0.45	0.49	0.52			
1400	0.00	0.05	0.13	0.22	0.30	0.37	0.43	0.48	0.52	0.56			
1500	0.00	0.05	0.14	0.24	0.32	0.39	0.46	0.52	0.56	0.60			
1600	0.00	0.05	0.15	0.25	0.34	0.42	0.49	0.55	0.60	0.64			
1700	0.00	0.06	0.15	0.27	0.37	0.44	0.52	0.58	0.64	0.67			
1800	0.00	0.06	0.16	0.28	0.39	0.47	0.55	0.62	0.67	0.71			
1900	0.00	0.06	0.17	0.30	0.41	0.50	0.58	0.65	0.71	0.75			
2000	0.00	0.07	0.18	0.32	0.43	0.52	0.61	0.69	0.75	0.79			
2100	0.00	0.07	0.19	0.33	0.45	0.55	0.64	0.72	0.79	0.83			
2200	0.00	0.07	0.20	0.35	0.47	0.57	0.67	0.76	0.82	0.87			
2300	0.00	0.08	0.21	0.36	0.50	0.60	0.70	0.79	0.86	0.91			
2400	0.00	0.08	0.22	0.38	0.52	0.63	0.73	0.83	0.90	0.95			
2500	0.00	0.08	0.23	0.40	0.54	0.65	0.76	0.86	0.94	0.99			
2600	0.00	0.09	0.24	0.41	0.56	0.68	0.79	0.89	0.97	1.03			
2700	0.00	0.09	0.25	0.43	0.58	0.70	0.83	0.93	1.01	1.07			
2800	0.00	0.09	0.25	0.44	0.60	0.73	0.86	0.96	1.05	1.11			
2900	0.00	0.10	0.26	0.46	0.62	0.76	0.89	1.00	1.09	1.15			
3000	0.00	0.10	0.27	0.47	0.65	0.78	0.92	1.03	1.12	1.19			
3100	0.00	0.10	0.28	0.49	0.67	0.81	0.95	1.07	1.16	1.23			
3200	0.00	0.11	0.29	0.51	0.69	0.84	0.98	1.10	1.20	1.27			
3300	0.00	0.11	0.30	0.52	0.71	0.86	1.01	1.14	1.24	1.31			
3400	0.00	0.11	0.31	0.54	0.73	0.89	1.04	1.17	1.27	1.35			
3500	0.00	0.12	0.32	0.55	0.75	0.91	1.07	1.20	1.31	1.39			
3600	0.00	0.12	0.33	0.57	0.78	0.94	1.10	1.24	1.35	1.43			
3700	0.00	0.12	0.34	0.59	0.80	0.97	1.13	1.27	1.39	1.47			
3800	0.00	0.13	0.34	0.60	0.82	0.99	1.16	1.31	1.42	1.51			
3900	0.00	0.13	0.35	0.62	0.84	1.02	1.19	1.34	1.46	1.55			
4000	0.00	0.13	0.36	0.63	0.86	1.04	1.22	1.38	1.50	1.59			
4100	0.00	0.14	0.37	0.65	0.88	1.07	1.25	1.41	1.54	1.63			
4200	0.00	0.14	0.38	0.66	0.90	1.10	1.28	1.44	1.57	1.67			
4300	0.00	0.14	0.39	0.68	0.93	1.12	1.31	1.48	1.61	1.71			
4400	0.00	0.15	0.40	0.70	0.95	1.15	1.34	1.51	1.65	1.75			
4500	0.00	0.15	0.41	0.71	0.97	1.17	1.38	1.55	1.69	1.79			
4600	0.00	0.15	0.42	0.73	0.99	1.20	1.41	1.58	1.72	1.83			
4700	0.00	0.16	0.43	0.74	1.01	1.23	1.44	1.62	1.76	1.87			
4800	0.00	0.16	0.44	0.76	1.03	1.25	1.47	1.65	1.80	1.91			
4900	0.00	0.16	0.44	0.78	1.06	1.28	1.50	1.69	1.84	1.95			
5000	0.00	0.17	0.45	0.79	1.08	1.30	1.53	1.72	1.87	1.98			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L
SPA-800	800	0.82
SPA-850	850	0.83
SPA-900	900	0.84
SPA-950	950	0.85
SPA-1000	1000	0.86
SPA-1060	1060	0.87
SPA-1120	1120	0.88
SPA-1180	1180	0.89
SPA-1250	1250	0.90
SPA-1320	1320	0.91
SPA-1400	1400	0.92
SPA-1500	1500	0.93
SPA-1600	1600	0.94
SPA-1700	1700	0.95
SPA-1800	1800	0.96
SPA-1900	1900	0.97
SPA-2000	2000	0.98
SPA-2120	2120	0.99
SPA-2240	2240	1.00
SPA-2360	2360	1.01
SPA-2500	2500	1.02
SPA-2650	2650	1.03
SPA-2800	2800	1.04
SPA-3000	3000	1.05
SPA-3150	3150	1.06
SPA-3350	3350	1.07
SPA-3550	3550	1.08
SPA-3750	3750	1.09
SPA-4000	4000	1.10
SPA-4250	4250	1.11
SPA-4500	4500	1.12

Number of belts required = $\frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$

POWER RATINGS SUPER HC® MN / SUPER HC®

Basic kW per belt or rib

SPB-SPB PowerBand®-5V-15J

All values printed in italics are for use with Super HC® Moulded Notch construction only.

RPM of faster shaft	112	118	125	132	140	150	160	170	180	190	200	212	224	236	250	265	280
585	1.91	2.17	2.48	2.79	3.14	3.58	3.99	4.48	4.97	5.46	5.95	6.52	7.10	7.67	8.33	9.04	9.74
700	2.17	2.48	2.84	3.20	3.61	4.12	4.64	5.22	5.80	6.37	6.94	7.62	8.29	8.96	9.74	10.56	11.38
725	2.22	2.54	2.92	3.29	3.71	4.24	4.78	5.38	5.97	6.56	7.15	7.85	8.55	9.23	10.03	10.88	11.72
870	2.52	2.90	3.34	3.77	4.27	4.89	5.56	6.27	6.96	7.66	8.35	9.17	9.98	10.78	11.72	12.70	13.68
950	2.67	3.08	3.56	4.03	4.56	5.23	5.98	6.74	7.49	8.24	8.98	9.87	10.74	11.61	12.61	13.67	14.71
1160	3.04	3.53	4.10	4.66	5.30	6.09	7.02	7.92	8.82	9.70	10.58	11.62	12.64	13.66	14.83	16.06	17.27
1450	3.50	4.09	4.77	5.45	6.22	7.18	8.34	9.42	10.49	11.55	12.59	13.82	15.03	16.22	17.58	19.00	20.38
1750	3.90	4.59	5.40	6.19	7.09	8.20	9.56	10.81	12.04	13.25	14.43	15.82	17.18	18.50	20.00	21.55	23.03
2850	4.88	5.91	7.10	8.27	9.58	11.19	12.62	14.25	15.80	17.28	18.68	20.25	21.69	22.99	24.34	25.56	
3450		6.32	7.67	9.00	10.49	12.31	13.18	14.83	16.34	17.73	18.98	20.28					
100	0.49	0.54	0.60	0.67	0.74	0.83	0.86	0.95	1.05	1.14	1.24	1.35	1.46	1.57	1.71	1.84	1.98
200	0.85	0.95	1.07	1.19	1.32	1.49	1.58	1.76	1.94	2.12	2.31	2.52	2.74	2.95	3.20	3.46	3.73
300	1.16	1.31	1.48	1.65	1.84	2.08	2.25	2.52	2.78	3.04	3.31	3.62	3.93	4.25	4.61	4.99	5.38
400	1.44	1.63	1.85	2.07	2.32	2.63	2.89	3.23	3.58	3.92	4.26	4.67	5.08	5.49	5.96	6.46	6.96
500	1.70	1.93	2.20	2.47	2.78	3.15	3.49	3.92	4.34	4.77	5.19	5.69	6.19	6.68	7.26	7.87	8.48
600	1.94	2.22	2.53	2.85	3.20	3.65	4.08	4.58	5.08	5.58	6.08	6.67	7.26	7.84	8.52	9.24	9.95
700	2.17	2.48	2.84	3.20	3.61	4.12	4.64	5.22	5.80	6.37	6.94	7.62	8.29	8.96	9.74	10.56	11.38
800	2.38	2.73	3.14	3.54	4.01	4.58	5.19	5.84	6.49	7.14	7.78	8.54	9.29	10.05	10.91	11.84	12.75
900	2.58	2.97	3.42	3.87	4.38	5.02	5.72	6.45	7.16	7.88	8.59	9.43	10.27	11.09	12.05	13.07	14.07
1000	2.76	3.19	3.69	4.18	4.74	5.44	6.23	7.03	7.82	8.60	9.37	10.29	11.21	12.11	13.15	14.25	15.34
1100	2.94	3.41	3.95	4.48	5.09	5.85	6.73	7.59	8.45	9.29	10.13	11.13	12.11	13.09	14.21	15.40	16.56
1200	3.11	3.61	4.20	4.77	5.43	6.24	7.21	8.14	9.06	9.97	10.87	11.94	12.99	14.03	15.23	16.49	17.73
1300	3.27	3.81	4.43	5.05	5.76	6.62	7.67	8.67	9.65	10.62	11.58	12.71	13.83	14.94	16.20	17.53	18.83
1400	3.42	4.00	4.66	5.32	6.07	7.00	8.12	9.18	10.22	11.24	12.26	13.46	14.64	15.80	17.13	18.52	19.88
1500	3.57	4.18	4.88	5.58	6.37	7.35	8.55	9.67	10.76	11.85	12.91	14.17	15.41	16.63	18.01	19.46	20.86
1600	3.70	4.35	5.09	5.83	6.67	7.70	8.97	10.14	11.29	12.43	13.54	14.86	16.15	17.41	18.85	20.34	21.78
1700	3.83	4.51	5.30	6.07	6.95	8.04	9.37	10.59	11.80	12.98	14.14	15.51	16.85	18.15	19.63	21.16	22.64
1800	3.96	4.67	5.49	6.31	7.23	8.37	9.75	11.02	12.28	13.51	14.71	16.13	17.51	18.85	20.36	21.92	23.42
1900	4.07	4.82	5.68	6.53	7.49	8.68	10.11	11.44	12.74	14.01	15.25	16.71	18.12	19.49	21.04	22.62	24.12
2000	4.18	4.96	5.86	6.75	7.75	8.99	10.46	11.83	13.17	14.48	15.76	17.25	18.70	20.10	21.66	23.25	24.75
2100	4.29	5.10	6.03	6.96	8.00	9.29	10.79	12.20	13.58	14.93	16.24	17.76	19.23	20.65	22.22	23.81	25.30
2200	4.39	5.23	6.20	7.16	8.24	9.57	11.10	12.55	13.97	15.34	16.68	18.23	19.72	21.14	22.72	24.30	25.77
2300	4.48	5.35	6.35	7.35	8.47	9.85	11.39	12.88	14.33	15.73	17.09	18.66	20.16	21.59	23.16	24.72	26.15
2400	4.57	5.47	6.51	7.53	8.69	10.11	11.66	13.18	14.66	16.09	17.47	19.05	20.55	21.98	23.53	25.06	26.44
2500	4.65	5.58	6.65	7.71	8.90	10.37	11.91	13.46	14.96	16.41	17.80	19.39	20.90	22.31	23.84	25.32	26.63
2600	4.72	5.68	6.79	7.88	9.11	10.62	12.14	13.72	15.24	16.70	18.10	19.70	21.19	22.58	24.07	25.49	26.73
2700	4.79	5.78	6.92	8.04	9.30	10.85	12.35	13.95	15.49	16.96	18.36	19.95	21.43	22.79	24.23	25.59	26.74
2800	4.85	5.87	7.04	8.19	9.49	11.08	12.53	14.16	15.71	17.18	18.59	20.16	21.61	22.94	24.32	25.59	
2900	4.91	5.96	7.16	8.34	9.67	11.30	12.70	14.34	15.89	17.37	18.77	20.32	21.74	23.02	24.33		
3000	4.96	6.03	7.27	8.48	9.84	11.50	12.84	14.49	16.05	17.52	18.90	20.43	21.81	23.04	24.27		
3100		6.11	7.37	8.61	10.00	11.70	12.96	14.61	16.18	17.64	19.00	20.49	21.82	22.98			
3200		6.17	7.46	8.73	10.15	11.89	13.05	14.71	16.27	17.71	19.05	20.50	21.77	22.86			
3300			7.55	8.85	10.30	12.06	13.12	14.78	16.32	17.75	19.06	20.45	21.66				
3400			7.63	8.95	10.43	12.23	13.17	14.82	16.35	17.75	19.01	20.35	21.48				
3500				9.05	10.56	12.38	13.19	14.83	16.33	17.70	18.93	20.19					
3600					10.67	12.53	13.18	14.80	16.28	17.61	18.79	19.98					
3700						12.66	13.15	14.75	16.20	17.48	18.60						
3800							13.09	14.66	16.07	17.31	18.36						
3900								14.54	15.91	17.08							

For speeds over 30 m/s we recommend that pulleys be dynamically balanced. Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

d x RPM
228728

6000 Hrs

d x RPM
117647



POWER RATINGS SUPER HC[®] MN / SUPER HC[®]

Additional kW per belt or rib for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.05	1.06 to 1.11	1.12 to 1.18	1.19 to 1.26	1.27 to 1.38	1.39 to 1.57	1.58 to 1.94	1.95 to 3.38	>3.39
585	0.00	0.04	0.12	0.20	0.28	0.34	0.39	0.44	0.48	0.51
700	0.00	0.05	0.14	0.24	0.33	0.40	0.47	0.53	0.58	0.61
725	0.00	0.05	0.14	0.25	0.34	0.42	0.49	0.55	0.60	0.63
870	0.00	0.06	0.17	0.30	0.41	0.50	0.59	0.66	0.72	0.76
950	0.00	0.07	0.19	0.33	0.45	0.55	0.64	0.72	0.78	0.83
1160	0.00	0.09	0.23	0.40	0.55	0.67	0.78	0.88	0.96	1.01
1450	0.00	0.11	0.29	0.50	0.69	0.83	0.98	1.10	1.20	1.27
1750	0.00	0.13	0.35	0.61	0.83	1.01	1.18	1.32	1.44	1.53
2850	0.00	0.21	0.57	0.99	1.35	1.64	1.92	2.16	2.35	2.49
3450	0.00	0.25	0.69	1.20	1.63	1.98	2.32	2.61	2.85	3.01
100	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.08	0.09
200	0.00	0.01	0.04	0.07	0.09	0.11	0.13	0.15	0.16	0.17
300	0.00	0.02	0.06	0.10	0.14	0.17	0.20	0.23	0.25	0.26
400	0.00	0.03	0.08	0.14	0.19	0.23	0.27	0.30	0.33	0.35
500	0.00	0.04	0.10	0.17	0.24	0.29	0.34	0.38	0.41	0.44
600	0.00	0.04	0.12	0.21	0.28	0.34	0.40	0.45	0.49	0.52
700	0.00	0.05	0.14	0.24	0.33	0.40	0.47	0.53	0.58	0.61
800	0.00	0.06	0.16	0.28	0.38	0.46	0.54	0.61	0.66	0.70
900	0.00	0.07	0.18	0.31	0.43	0.52	0.61	0.68	0.74	0.79
1000	0.00	0.07	0.20	0.35	0.47	0.57	0.67	0.76	0.82	0.87
1100	0.00	0.08	0.22	0.38	0.52	0.63	0.74	0.83	0.91	0.96
1200	0.00	0.09	0.24	0.42	0.57	0.69	0.81	0.91	0.99	1.05
1300	0.00	0.10	0.26	0.45	0.62	0.75	0.87	0.98	1.07	1.14
1400	0.00	0.10	0.28	0.49	0.66	0.80	0.94	1.06	1.15	1.22
1500	0.00	0.11	0.30	0.52	0.71	0.86	1.01	1.14	1.24	1.31
1600	0.00	0.12	0.32	0.56	0.76	0.92	1.08	1.21	1.32	1.40
1700	0.00	0.12	0.34	0.59	0.81	0.98	1.14	1.29	1.40	1.49
1800	0.00	0.13	0.36	0.63	0.85	1.03	1.21	1.36	1.48	1.57
1900	0.00	0.14	0.38	0.66	0.90	1.09	1.28	1.44	1.57	1.66
2000	0.00	0.15	0.40	0.70	0.95	1.15	1.35	1.51	1.65	1.75
2100	0.00	0.15	0.42	0.73	1.00	1.21	1.41	1.59	1.73	1.83
2200	0.00	0.16	0.44	0.77	1.04	1.26	1.48	1.67	1.81	1.92
2300	0.00	0.17	0.46	0.80	1.09	1.32	1.55	1.74	1.90	2.01
2400	0.00	0.18	0.48	0.84	1.14	1.38	1.61	1.82	1.98	2.10
2500	0.00	0.18	0.50	0.87	1.18	1.44	1.68	1.89	2.06	2.18
2600	0.00	0.19	0.52	0.91	1.23	1.49	1.75	1.97	2.14	2.27
2700	0.00	0.20	0.54	0.94	1.28	1.55	1.82	2.04	2.23	2.36
2800	0.00	0.21	0.56	0.97	1.33	1.61	1.88	2.12	2.31	2.45
2900	0.00	0.21	0.58	1.01	1.37	1.67	1.95	2.20	2.39	2.53
3000	0.00	0.22	0.60	1.04	1.42	1.72	2.02	2.27	2.47	2.62
3100	0.00	0.23	0.62	1.08	1.47	1.78	2.09	2.35	2.56	2.71
3200	0.00	0.23	0.64	1.11	1.52	1.84	2.15	2.42	2.64	2.80
3300	0.00	0.24	0.66	1.15	1.56	1.90	2.22	2.50	2.72	2.88
3400	0.00	0.25	0.68	1.18	1.61	1.95	2.29	2.57	2.80	2.97
3500	0.00	0.26	0.70	1.22	1.66	2.01	2.35	2.65	2.89	3.06
3600	0.00	0.26	0.72	1.25	1.71	2.07	2.42	2.73	2.97	3.14
3700	0.00	0.27	0.74	1.29	1.75	2.13	2.49	2.80	3.05	3.23
3800	0.00	0.28	0.76	1.32	1.80	2.18	2.56	2.88	3.13	3.32
3900	0.00	0.29	0.78	1.36	1.85	2.24	2.62	2.95	3.22	3.41
4000	0.00	0.29	0.80	1.39	1.90	2.30	2.69	3.03	3.30	3.49
4100	0.00	0.30	0.82	1.43	1.94	2.35	2.76	3.10	3.38	3.58
4200	0.00	0.31	0.84	1.46	1.99	2.41	2.83	3.18	3.46	3.67
4300	0.00	0.32	0.86	1.50	2.04	2.47	2.89	3.26	3.55	3.76
4400	0.00	0.32	0.88	1.53	2.09	2.53	2.96	3.33	3.63	3.84
4500	0.00	0.33	0.90	1.57	2.13	2.58	3.03	3.41	3.71	3.93
4600	0.00	0.34	0.92	1.60	2.18	2.64	3.09	3.48	3.79	4.02
4700	0.00	0.34	0.94	1.64	2.23	2.70	3.16	3.56	3.88	4.11
4800	0.00	0.35	0.96	1.67	2.27	2.76	3.23	3.63	3.96	4.19
4900	0.00	0.36	0.98	1.71	2.32	2.81	3.30	3.71	4.04	4.28
5000	0.00	0.37	1.00	1.74	2.37	2.87	3.36	3.79	4.12	4.37

D - d / A	Arc of contact on small pulley (degrees)	Factor G
0.00	180	1.00
0.10	174	0.99
0.20	169	0.97
0.30	163	0.96
0.40	157	0.94
0.50	151	0.93
0.60	145	0.91
0.70	139	0.89
0.80	133	0.87
0.90	127	0.85
1.00	120	0.82
1.10	113	0.80
1.20	106	0.77
1.30	99	0.73
1.40	91	0.70
1.50	83	0.65

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L	Belt ref.	RMA effective length mm	Corr. factor C _L
SPB-1250	1250	0.85	5V-500	1270	0.85
SPB-1320	1320	0.86	5V-530	1345	0.86
SPB-1400	1400	0.87	5V-560	1420	0.87
SPB-1500	1500	0.88	5V-600	1525	0.88
SPB-1600	1600	0.89	5V-630	1600	0.89
SPB-1700	1700	0.90	5V-670	1700	0.90
SPB-1800	1800	0.91	5V-710	1805	0.91
SPB-1900	1900	0.92	5V-750	1905	0.92
SPB-2000	2000	0.93	5V-800	2030	0.93
SPB-2120	2120	0.93	5V-850	2160	0.94
SPB-2240	2240	0.94	5V-900	2285	0.95
SPB-2360	2360	0.95	5V-950	2415	0.96
SPB-2500	2500	0.96	5V-1000	2540	0.96
SPB-2650	2650	0.97	5V-1060	2690	0.97
SPB-2800	2800	0.98	5V-1120	2845	0.98
SPB-3000	3000	0.99	5V-1180	2995	0.99
SPB-3150	3150	1.00	5V-1250	3175	1.00
SPB-3350	3350	1.01	5V-1320	3355	1.01
SPB-3550	3550	1.02	5V-1400	3555	1.02
SPB-3750	3750	1.03	5V-1500	3810	1.03
SPB-4000	4000	1.04	5V-1600	4065	1.04
SPB-4250	4250	1.05	5V-1700	4320	1.05
SPB-4500	4500	1.06	5V-1800	4570	1.06
SPB-4750	4750	1.07	5V-1900	4825	1.07
SPB-5000	5000	1.07	5V-2000	5080	1.08
SPB-5300	5300	1.08	5V-2120	5385	1.09
SPB-5600	5600	1.09	5V-2240	5690	1.09
SPB-6000	6000	1.10	5V-2360	5995	1.10
SPB-6300	6300	1.11	5V-2500	6350	1.11
SPB-6700	6700	1.12	5V-2650	6730	1.12
SPB-7100	7100	1.13	5V-2800	7110	1.13
SPB-7500	7500	1.14	5V-3000	7620	1.14
SPB-8000	8000	1.15	5V-3150	8000	1.15
			5V-3550	9015	1.17

The sizes printed in colour are available as 15J PowerBand[®].

Number of belts required =
$$\frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$

POWER RATINGS SUPER HC[®] MN / SUPER HC[®]

Basic kW per belt

SPC-SPC PowerBand[®]

All values printed in italics are for use with Super HC[®] Moulded Notch construction only.

RPM of faster shaft	180	190	200	224	236	250	265	280	300	315	335	355	375	400	425	450	475
585	6.6	7.3	8.0	9.6	10.4	11.4	12.7	14.0	15.7	17.0	18.6	20.3	22.0	24.0	26.0	28.0	30.0
700	7.5	8.3	9.1	11.0	12.0	13.2	14.7	16.2	18.2	19.7	21.7	23.6	25.5	27.8	30.1	32.4	34.6
725	7.7	8.5	9.3	11.3	12.3	13.6	15.2	16.7	18.8	20.3	22.3	24.3	26.2	28.6	31.0	33.3	35.6
870	8.7	9.7	10.7	12.9	14.1	15.7	17.6	19.4	21.7	23.5	25.8	28.1	30.3	33.0	35.7	38.3	40.8
950	9.2	10.3	11.3	13.8	15.0	16.8	18.8	20.7	23.3	25.1	27.6	30.0	32.4	35.3	38.1	40.8	43.4
1160	10.5	11.8	13.0	15.9	17.3	19.5	21.8	24.0	27.0	29.1	31.9	34.6	37.2	40.4	43.4	46.3	49.0
1450	12.1	13.5	15.0	18.4	20.1	22.7	25.3	27.9	31.1	33.5	36.6	39.5	42.3	45.5	48.5	51.2	53.6
1750	13.4	15.1	16.8	20.7	22.6	25.1	28.0	30.7	34.2	36.7	39.8	42.6	45.2	48.0	50.5		
2850						25.7	28.0										
3450																	
50	0.9	1.0	1.1	1.3	1.4	1.3	1.5	1.6	1.8	1.9	2.1	2.2	2.4	2.6	2.9	3.1	3.3
100	1.7	1.8	2.0	2.3	2.5	2.5	2.7	3.0	3.3	3.6	3.9	4.2	4.6	5.0	5.4	5.8	6.2
150	2.3	2.5	2.7	3.2	3.5	3.5	3.9	4.3	4.8	5.1	5.6	6.1	6.6	7.2	7.8	8.4	9.0
200	2.9	3.2	3.5	4.1	4.4	4.5	5.0	5.5	6.1	6.6	7.3	7.9	8.5	9.3	10.1	10.9	11.7
250	3.5	3.8	4.1	4.9	5.3	5.5	6.1	6.7	7.5	8.1	8.9	9.7	10.4	11.4	12.4	13.3	14.3
300	4.0	4.4	4.8	5.7	6.2	6.4	7.2	7.9	8.8	9.5	10.4	11.4	12.3	13.4	14.6	15.7	16.8
350	4.5	4.9	5.4	6.5	7.0	7.4	8.2	9.0	10.1	10.9	12.0	13.0	14.1	15.4	16.7	18.0	19.3
400	5.0	5.5	6.0	7.2	7.8	8.3	9.2	10.1	11.3	12.2	13.4	14.6	15.8	17.3	18.8	20.2	21.7
450	5.4	6.0	6.5	7.9	8.5	9.1	10.2	11.2	12.5	13.6	14.9	16.2	17.5	19.2	20.8	22.4	24.0
500	5.9	6.5	7.1	8.5	9.3	10.0	11.1	12.2	13.7	14.8	16.3	17.8	19.2	21.0	22.8	24.5	26.3
550	6.3	7.0	7.6	9.2	10.0	10.8	12.1	13.3	14.9	16.1	17.7	19.3	20.8	22.8	24.7	26.6	28.5
600	6.7	7.4	8.1	9.8	10.7	11.6	13.0	14.3	16.0	17.3	19.1	20.8	22.4	24.5	26.6	28.6	30.6
650	7.1	7.9	8.6	10.4	11.3	12.4	13.9	15.3	17.1	18.5	20.4	22.2	24.0	26.2	28.4	30.5	32.7
700	7.5	8.3	9.1	11.0	12.0	13.2	14.7	16.2	18.2	19.7	21.7	23.6	25.5	27.8	30.1	32.4	34.6
750	7.9	8.7	9.6	11.6	12.6	14.0	15.6	17.2	19.3	20.9	22.9	25.0	27.0	29.4	31.9	34.2	36.6
800	8.2	9.1	10.0	12.2	13.2	14.7	16.4	18.1	20.3	22.0	24.1	26.3	28.4	31.0	33.5	36.0	38.4
850	8.6	9.5	10.5	12.7	13.8	15.4	17.2	19.0	21.3	23.1	25.3	27.6	29.8	32.5	35.1	37.6	40.2
900	8.9	9.9	10.9	13.3	14.4	16.2	18.0	19.9	22.3	24.1	26.5	28.8	31.1	33.9	36.6	39.2	41.8
950	9.2	10.3	11.3	13.8	15.0	16.8	18.8	20.7	23.3	25.1	27.6	30.0	32.4	35.3	38.1	40.8	43.4
1000	9.6	10.7	11.7	14.3	15.6	17.5	19.6	21.6	24.2	26.1	28.7	31.2	33.6	36.6	39.4	42.2	44.9
1050	9.9	11.0	12.1	14.8	16.1	18.2	20.3	22.4	25.1	27.1	29.7	32.3	34.8	37.8	40.8	43.6	46.3
1100	10.2	11.4	12.5	15.3	16.7	18.8	21.0	23.1	26.0	28.0	30.7	33.4	35.9	39.0	42.0	44.9	47.6
1150	10.5	11.7	12.9	15.8	17.2	19.4	21.7	23.9	26.8	28.9	31.7	34.4	37.0	40.2	43.2	46.1	48.8
1200	10.7	12.0	13.3	16.2	17.7	20.0	22.3	24.6	27.6	29.8	32.6	35.4	38.0	41.2	44.3	47.2	49.9
1250	11.0	12.3	13.6	16.7	18.2	20.6	23.0	25.3	28.4	30.6	33.5	36.3	39.0	42.2	45.3	48.2	50.9
1300	11.3	12.7	14.0	17.1	18.7	21.1	23.6	26.0	29.1	31.4	34.3	37.2	39.9	43.2	46.2	49.1	51.7
1350	11.6	13.0	14.3	17.6	19.2	21.7	24.2	26.6	29.8	32.1	35.1	38.0	40.8	44.0	47.1	49.9	52.5
1400	11.8	13.2	14.7	18.0	19.6	22.2	24.8	27.3	30.5	32.9	35.9	38.8	41.5	44.8	47.8	50.6	53.1
1450	12.1	13.5	15.0	18.4	20.1	22.7	25.3	27.9	31.1	33.5	36.6	39.5	42.3	45.5	48.5	51.2	53.6
1500	12.3	13.8	15.3	18.8	20.5	23.1	25.8	28.4	31.8	34.2	37.2	40.2	42.9	46.1	49.1	51.7	54.0
1550	12.5	14.1	15.6	19.2	21.0	23.6	26.3	28.9	32.3	34.8	37.9	40.8	43.5	46.7	49.5	52.1	54.3
1600	12.8	14.3	15.9	19.6	21.4	24.0	26.8	29.4	32.9	35.3	38.4	41.3	44.0	47.2	49.9	52.3	54.4
1650	13.0	14.6	16.2	20.0	21.8	24.4	27.2	29.9	33.3	35.8	38.9	41.8	44.5	47.5	50.2	52.5	
1700	13.2	14.8	16.5	20.3	22.2	24.8	27.6	30.3	33.8	36.3	39.4	42.2	44.9	47.8	50.4	52.5	
1750	13.4	15.1	16.8	20.7	22.6	25.1	28.0	30.7	34.2	36.7	39.8	42.6	45.2	48.0	50.5		
1800	13.6	15.3	17.0	21.0	22.9	25.5	28.4	31.1	34.6	37.0	40.1	42.9	45.4	48.1			
1850	13.8	15.5	17.3	21.3	23.3	25.8	28.7	31.4	34.9	37.4	40.4	43.1	45.6	48.2			
1900	14.0	15.8	17.5	21.6	23.6	26.1	29.0	31.7	35.2	37.6	40.6	43.3	45.6	48.1			
1950	14.1	16.0	17.8	22.0	24.0	26.3	29.2	32.0	35.5	37.9	40.8	43.4	45.6				
2000	14.3	16.2	18.0	22.2	24.3	26.5	29.5	32.2	35.7	38.0	40.9	43.4	45.5				
2050	14.5	16.4	18.2	22.5	24.6	26.7	29.7	32.4	35.8	38.2	40.9	43.3					
2100	14.6	16.5	18.4	22.8	24.9	26.9	29.8	32.6	35.9	38.2	40.9	43.2					
2150	14.8	16.7	18.6	23.1	25.2	27.0	30.0	32.7	36.0	38.2	40.8	43.0					
2200	14.9	16.9	18.8	23.3	25.5	27.1	30.1	32.8	36.0	38.2	40.7						
2250	15.1	17.1	19.0	23.6	25.8	27.2	30.1	32.8	36.0	38.1	40.5						
2300	15.2	17.2	19.2	23.8	26.0	27.3	30.2	32.8	35.9	37.9							
2350	15.3	17.4	19.4	24.0	26.2	27.3	30.2	32.7	35.8	37.7							
2400		17.5	19.5	24.2	26.5	27.3	30.1	32.7	35.6	37.4							
2450			19.7	24.4	26.7	27.3	30.0	32.5	35.4								
2500		19.9	24.6	26.9	27.2	29.9	32.3	35.1									

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

$\frac{d \times \text{RPM}}{128090}$

6000 Hrs

$\frac{d \times \text{RPM}}{65876}$

POWER RATINGS SUPER HC® MN / SUPER HC®

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	Speed Ratio										D - d A	Arc of contact on small pulley (degrees)	Factor G
	1 to 1.01	1.02 to 1.05	1.06 to 1.11	1.12 to 1.18	1.19 to 1.26	1.27 to 1.38	1.39 to 1.57	1.58 to 1.94	1.95 to 3.38	>3.39			
585	0.00	0.12	0.32	0.55	0.75	0.91	1.07	1.20	1.31	1.39	0.00	180	1.00
700	0.00	0.14	0.38	0.66	0.90	1.09	1.28	1.44	1.57	1.66	0.10	174	0.99
725	0.00	0.14	0.39	0.69	0.93	1.13	1.32	1.49	1.62	1.72	0.20	169	0.97
870	0.00	0.17	0.47	0.82	1.12	1.36	1.59	1.79	1.95	2.06	0.30	163	0.96
950	0.00	0.19	0.52	0.90	1.22	1.48	1.74	1.95	2.13	2.25	0.40	157	0.94
1160	0.00	0.23	0.63	1.10	1.49	1.81	2.12	2.38	2.60	2.75	0.50	151	0.93
1450	0.00	0.29	0.79	1.37	1.87	2.26	2.65	2.98	3.25	3.44	0.60	145	0.91
1750	0.00	0.35	0.95	1.65	2.25	2.73	3.20	3.60	3.92	4.15	0.70	139	0.89
2850	0.00	0.57	1.55	2.69	3.67	4.44	5.21	5.86	6.38	6.76	0.80	133	0.87
3450	0.00	0.69	1.87	3.26	4.44	5.38	6.30	7.09	7.73	8.18	0.90	127	0.85
50	0.00	0.01	0.03	0.05	0.06	0.08	0.09	0.10	0.11	0.12	1.00	120	0.82
100	0.00	0.02	0.05	0.09	0.13	0.16	0.18	0.21	0.22	0.24	1.10	113	0.80
150	0.00	0.03	0.08	0.14	0.19	0.23	0.27	0.31	0.34	0.36	1.20	106	0.77
200	0.00	0.04	0.11	0.19	0.26	0.31	0.37	0.41	0.45	0.47	1.30	99	0.73
250	0.00	0.05	0.14	0.24	0.32	0.39	0.46	0.51	0.56	0.59	1.40	91	0.70
300	0.00	0.06	0.16	0.28	0.39	0.47	0.55	0.62	0.67	0.71	1.50	83	0.65
350	0.00	0.07	0.19	0.33	0.45	0.55	0.64	0.72	0.78	0.83			
400	0.00	0.08	0.22	0.38	0.51	0.62	0.73	0.82	0.90	0.95			
450	0.00	0.09	0.24	0.43	0.58	0.70	0.82	0.93	1.01	1.07			
500	0.00	0.10	0.27	0.47	0.64	0.78	0.91	1.03	1.12	1.19			
550	0.00	0.11	0.30	0.52	0.71	0.86	1.00	1.13	1.23	1.30			
600	0.00	0.12	0.33	0.57	0.77	0.94	1.10	1.23	1.34	1.42			
650	0.00	0.13	0.35	0.61	0.84	1.01	1.19	1.34	1.46	1.54			
700	0.00	0.14	0.38	0.66	0.90	1.09	1.28	1.44	1.57	1.66			
750	0.00	0.15	0.41	0.71	0.97	1.17	1.37	1.54	1.68	1.78	SPC-2000	2000	0.86
800	0.00	0.16	0.43	0.76	1.03	1.25	1.46	1.64	1.79	1.90	SPC-2120	2120	0.87
850	0.00	0.17	0.46	0.80	1.09	1.33	1.55	1.75	1.90	2.02	SPC-2240	2240	0.88
900	0.00	0.18	0.49	0.85	1.16	1.40	1.64	1.85	2.02	2.13	SPC-2360	2360	0.89
950	0.00	0.19	0.52	0.90	1.22	1.48	1.74	1.95	2.13	2.25	SPC-2500	2500	0.90
1000	0.00	0.20	0.54	0.95	1.29	1.56	1.83	2.06	2.24	2.37	SPC-2650	2650	0.90
1050	0.00	0.21	0.57	0.99	1.35	1.64	1.92	2.16	2.35	2.49	SPC-2800	2800	0.91
1100	0.00	0.22	0.60	1.04	1.42	1.72	2.01	2.26	2.46	2.61	SPC-3000	3000	0.92
1150	0.00	0.23	0.62	1.09	1.48	1.79	2.10	2.36	2.58	2.73	SPC-3150	3150	0.93
1200	0.00	0.24	0.65	1.13	1.54	1.87	2.19	2.47	2.69	2.85	SPC-3350	3350	0.94
1250	0.00	0.25	0.68	1.18	1.61	1.95	2.28	2.57	2.80	2.97	SPC-3550	3550	0.95
1300	0.00	0.26	0.71	1.23	1.67	2.03	2.37	2.67	2.91	3.08	SPC-3750	3750	0.96
1350	0.00	0.27	0.73	1.28	1.74	2.11	2.47	2.78	3.02	3.20	SPC-4000	4000	0.97
1400	0.00	0.28	0.76	1.32	1.80	2.18	2.56	2.88	3.14	3.32	SPC-4250	4250	0.98
1450	0.00	0.29	0.79	1.37	1.87	2.26	2.65	2.98	3.25	3.44	SPC-4500	4500	0.98
1500	0.00	0.30	0.81	1.42	1.93	2.34	2.74	3.08	3.36	3.56	SPC-4750	4750	0.99
1550	0.00	0.31	0.84	1.47	1.99	2.42	2.83	3.19	3.47	3.68	SPC-5000	5000	1.00
1600	0.00	0.32	0.87	1.51	2.06	2.50	2.92	3.29	3.58	3.80	SPC-5300	5300	1.01
1650	0.00	0.33	0.89	1.56	2.12	2.57	3.01	3.39	3.70	3.91	SPC-5600	5600	1.02
1700	0.00	0.34	0.92	1.61	2.19	2.65	3.11	3.49	3.81	4.03	SPC-6000	6000	1.03
1750	0.00	0.35	0.95	1.65	2.25	2.73	3.20	3.60	3.92	4.15	SPC-6300	6300	1.03
1800	0.00	0.36	0.98	1.70	2.32	2.81	3.29	3.70	4.03	4.27	SPC-6700	6700	1.04
1850	0.00	0.37	1.00	1.75	2.38	2.89	3.38	3.80	4.14	4.39	SPC-7100	7100	1.05
1900	0.00	0.38	1.03	1.80	2.44	2.96	3.47	3.91	4.25	4.51	SPC-7500	7500	1.06
1950	0.00	0.39	1.06	1.84	2.51	3.04	3.56	4.01	4.37	4.63	SPC-8000	8000	1.07
2000	0.00	0.40	1.08	1.89	2.57	3.12	3.65	4.11	4.48	4.74	SPC-8500	8500	1.08
2050	0.00	0.41	1.11	1.94	2.64	3.20	3.74	4.21	4.59	4.86	SPC-9000	9000	1.09
2100	0.00	0.42	1.14	1.99	2.70	3.28	3.84	4.32	4.70	4.98			
2150	0.00	0.43	1.17	2.03	2.77	3.35	3.93	4.42	4.81	5.10			
2200	0.00	0.44	1.19	2.08	2.83	3.43	4.02	4.52	4.93	5.22			
2250	0.00	0.45	1.22	2.13	2.90	3.51	4.11	4.63	5.04	5.34			
2300	0.00	0.46	1.25	2.17	2.96	3.59	4.20	4.73	5.15	5.46			
2350	0.00	0.47	1.27	2.22	3.02	3.66	4.29	4.83	5.26	5.57			
2400	0.00	0.48	1.30	2.27	3.09	3.74	4.38	4.93	5.37	5.69			
2450	0.00	0.49	1.33	2.32	3.15	3.82	4.48	5.04	5.49	5.81			
2500	0.00	0.50	1.36	2.36	3.22	3.90	4.57	5.14	5.60	5.93			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L
SPC-2000	2000	0.86
SPC-2120	2120	0.87
SPC-2240	2240	0.88
SPC-2360	2360	0.89
SPC-2500	2500	0.90
SPC-2650	2650	0.90
SPC-2800	2800	0.91
SPC-3000	3000	0.92
SPC-3150	3150	0.93
SPC-3350	3350	0.94
SPC-3550	3550	0.95
SPC-3750	3750	0.96
SPC-4000	4000	0.97
SPC-4250	4250	0.98
SPC-4500	4500	0.98
SPC-4750	4750	0.99
SPC-5000	5000	1.00
SPC-5300	5300	1.01
SPC-5600	5600	1.02
SPC-6000	6000	1.03
SPC-6300	6300	1.03
SPC-6700	6700	1.04
SPC-7100	7100	1.05
SPC-7500	7500	1.06
SPC-8000	8000	1.07
SPC-8500	8500	1.08
SPC-9000	9000	1.09

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$



POWER RATINGS SUPER HC®

Basic kW per belt or rib

8V-25J

RPM of faster shaft	315	335	355	375	400	425	450	475	500	530	560	600	630	670	710	750	800
585	19.9	22.5	25.0	27.6	30.7	33.8	36.8	39.9	42.8	46.3	49.8	54.3	57.6	61.9	66.0	70.1	74.9
700	22.9	25.9	28.9	31.8	35.4	38.9	42.4	45.8	49.2	53.1	57.0	62.0	65.6	70.2	74.6	78.9	83.8
725	23.5	26.6	29.7	32.7	36.4	40.0	43.6	47.1	50.5	54.5	58.4	63.5	67.1	71.8	76.3	80.5	85.4
870	26.9	30.5	34.0	37.4	41.6	45.7	49.7	53.5	57.3	61.7	65.9	71.2	74.9	79.6	84.0	87.9	92.3
950	28.7	32.4	36.1	39.7	44.2	48.5	52.6	56.6	60.5	65.0	69.2	74.5	78.2	82.8	86.8	90.4	94.1
1160	32.5	36.8	40.9	45.0	49.8	54.4	58.8	63.0	66.9	71.3	75.3	80.0	83.0				
1450	36.3	41.0	45.4	49.7	54.6	59.1	63.3	66.9	70.2								
1750	37.9	42.6	47.0	50.9	55.2	58.9											
2850																	
3450																	
50	2.4	2.6	2.9	3.2	3.5	3.8	4.2	4.5	4.8	5.2	5.6	6.1	6.5	7.0	7.5	8.1	8.7
100	4.4	4.9	5.4	5.9	6.6	7.2	7.8	8.5	9.1	9.8	10.6	11.6	12.3	13.3	14.3	15.2	16.5
150	6.3	7.0	7.8	8.5	9.4	10.4	11.3	12.2	13.1	14.2	15.3	16.7	17.8	19.2	20.7	22.1	23.8
200	8.1	9.0	10.0	11.0	12.2	13.4	14.6	15.8	17.0	18.4	19.8	21.7	23.1	24.9	26.8	28.6	30.9
250	9.8	11.0	12.2	13.4	14.9	16.3	17.8	19.3	20.7	22.5	24.2	26.5	28.2	30.4	32.7	34.9	37.6
300	11.4	12.9	14.3	15.7	17.4	19.2	20.9	22.6	24.3	26.4	28.4	31.1	33.1	35.7	38.3	40.9	44.1
350	13.0	14.7	16.3	17.9	19.9	21.9	23.9	25.9	27.8	30.2	32.5	35.5	37.8	40.8	43.8	46.7	50.3
400	14.6	16.4	18.3	20.1	22.4	24.6	26.8	29.0	31.2	33.9	36.4	39.8	42.4	45.7	49.0	52.2	56.2
450	16.1	18.1	20.2	22.2	24.7	27.2	29.7	32.1	34.5	37.4	40.2	44.0	46.7	50.4	53.9	57.4	61.7
500	17.5	19.8	22.0	24.2	27.0	29.7	32.4	35.1	37.7	40.8	43.9	47.9	50.9	54.8	58.7	62.4	66.9
550	18.9	21.4	23.8	26.2	29.2	32.1	35.0	37.9	40.8	44.1	47.4	51.7	54.9	59.1	63.1	67.0	71.8
600	20.3	23.0	25.6	28.1	31.3	34.5	37.6	40.7	43.7	47.3	50.8	55.3	58.7	63.0	67.2	71.3	76.2
650	21.6	24.5	27.2	30.0	33.4	36.8	40.1	43.3	46.5	50.3	54.0	58.7	62.2	66.8	71.1	75.3	80.2
700	22.9	25.9	28.9	31.8	35.4	38.9	42.4	45.8	49.2	53.1	57.0	62.0	65.6	70.2	74.6	78.9	83.8
750	24.2	27.3	30.4	33.5	37.3	41.0	44.7	48.3	51.8	55.8	59.8	64.9	68.6	73.4	77.8	82.0	86.9
800	25.4	28.7	32.0	35.2	39.2	43.0	46.8	50.5	54.2	58.4	62.5	67.7	71.5	76.2	80.7	84.8	89.5
850	26.5	30.0	33.4	36.8	40.9	44.9	48.9	52.7	56.4	60.8	64.9	70.2	74.0	78.7	83.1	87.1	91.6
900	27.6	31.2	34.8	38.3	42.6	46.7	50.8	54.7	58.6	63.0	67.2	72.5	76.3	80.9	85.2	89.0	93.2
950	28.7	32.4	36.1	39.7	44.2	48.5	52.6	56.6	60.5	65.0	69.2	74.5	78.2	82.8	86.8	90.4	94.1
1000	29.7	33.6	37.4	41.1	45.7	50.1	54.3	58.4	62.3	66.8	71.1	76.3	79.9	84.2	88.0	91.3	
1050	30.6	34.6	38.6	42.4	47.1	51.6	55.9	60.0	64.0	68.5	72.7	77.8	81.2	85.3	88.8		
1100	31.5	35.7	39.7	43.6	48.4	52.9	57.3	61.5	65.4	69.9	74.0	79.0	82.2	86.0			
1150	32.4	36.6	40.7	44.8	49.6	54.2	58.6	62.8	66.7	71.1	75.1	79.8	82.9				
1200	33.2	37.5	41.7	45.8	50.7	55.3	59.8	63.9	67.8	72.1	75.9	80.4	83.2				
1250	33.9	38.3	42.6	46.8	51.7	56.4	60.8	64.9	68.7	72.8	76.5	80.6					
1300	34.6	39.1	43.4	47.6	52.6	57.3	61.6	65.7	69.4	73.4	76.8						
1350	35.2	39.8	44.2	48.4	53.4	58.0	62.3	66.3	69.9	73.6	76.8						
1400	35.8	40.4	44.9	49.1	54.0	58.7	62.9	66.7	70.1	73.6							
1450	36.3	41.0	45.4	49.7	54.6	59.1	63.3	66.9	70.2								
1500	36.7	41.4	45.9	50.1	55.0	59.5	63.5	67.0	70.0								
1550	37.1	41.8	46.3	50.5	55.3	59.7	63.5	66.8									
1600	37.4	42.2	46.6	50.8	55.5	59.7	63.4	66.4									
1650	37.7	42.4	46.8	50.9	55.6	59.6	63.0										
1700	37.8	42.6	47.0	51.0	55.5	59.3											
1750	37.9	42.6	47.0	50.9	55.2	58.9											
1800	38.0	42.6	46.9	50.7	54.9												
1850	37.9	42.5	46.7	50.4	54.3												
1900	37.8	42.4	46.4	50.0	53.7												
1950	37.6	42.1	46.0	49.4													
2000	37.4	41.7	45.5	48.7													
2050	37.0	41.2	44.9														
2100	36.6	40.7	44.1														
2150	36.0	40.0	43.3														
2200	35.4	39.2															
2250	34.7	38.3															
2300	34.0																
2350	33.1																
2400	32.1																
2450																	
2500																	

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

12000 Hrs

6000 Hrs

0

$\frac{d \times \text{RPM}}{91575}$

$\frac{d \times \text{RPM}}{47103}$

POWER RATINGS SUPER HC®

Additional kW per belt or rib for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.05	1.06 to 1.11	1.12 to 1.18	1.19 to 1.26	1.27 to 1.38	1.39 to 1.57	1.58 to 1.94	1.95 to 3.38	>3.39	D - d A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.24	0.64	1.12	1.53	1.85	2.17	2.44	2.66	2.82	0.00	180	1.00
700	0.00	0.28	0.77	1.34	1.83	2.22	2.60	2.92	3.19	3.37	0.10	174	0.99
725	0.00	0.29	0.80	1.39	1.90	2.30	2.69	3.03	3.30	3.50	0.20	169	0.97
870	0.00	0.35	0.96	1.67	2.28	2.76	3.23	3.63	3.96	4.19	0.30	163	0.96
950	0.00	0.38	1.05	1.83	2.48	3.01	3.53	3.97	4.32	4.58	0.40	157	0.94
1160	0.00	0.47	1.28	2.23	3.03	3.68	4.31	4.85	5.28	5.59	0.50	151	0.93
1450	0.00	0.59	1.60	2.79	3.79	4.60	5.38	6.06	6.60	6.99	0.60	145	0.91
1750	0.00	0.71	1.93	3.36	4.58	5.55	6.50	7.31	7.96	8.44	0.70	139	0.89
2850	0.00	1.15	3.14	5.48	7.45	9.03	10.58	11.91	12.97	13.74	0.80	133	0.87
3450	0.00	1.40	3.80	6.63	9.02	10.93	12.81	14.41	15.70	16.63	0.90	127	0.85
50	0.00	0.02	0.06	0.10	0.13	0.16	0.19	0.21	0.23	0.24	1.00	120	0.82
100	0.00	0.04	0.11	0.19	0.26	0.32	0.37	0.42	0.46	0.48	1.10	113	0.80
150	0.00	0.06	0.17	0.29	0.39	0.48	0.56	0.63	0.68	0.72	1.20	106	0.77
200	0.00	0.08	0.22	0.38	0.52	0.63	0.74	0.84	0.91	0.96	1.30	99	0.73
250	0.00	0.10	0.28	0.48	0.65	0.79	0.93	1.04	1.14	1.21	1.40	91	0.70
300	0.00	0.12	0.33	0.58	0.78	0.95	1.11	1.25	1.37	1.45	1.50	83	0.65
350	0.00	0.14	0.39	0.67	0.92	1.11	1.30	1.46	1.59	1.69			
400	0.00	0.16	0.44	0.77	1.05	1.27	1.48	1.67	1.82	1.93			
450	0.00	0.18	0.50	0.86	1.18	1.43	1.67	1.88	2.05	2.17			
500	0.00	0.20	0.55	0.96	1.31	1.58	1.86	2.09	2.28	2.41			
550	0.00	0.22	0.61	1.06	1.44	1.74	2.04	2.30	2.50	2.65			
600	0.00	0.24	0.66	1.15	1.57	1.90	2.23	2.51	2.73	2.89			
650	0.00	0.26	0.72	1.25	1.70	2.06	2.41	2.72	2.96	3.13			
700	0.00	0.28	0.77	1.34	1.83	2.22	2.60	2.92	3.19	3.37			
750	0.00	0.30	0.83	1.44	1.96	2.38	2.78	3.13	3.41	3.62			
800	0.00	0.32	0.88	1.54	2.09	2.54	2.97	3.34	3.64	3.86			
850	0.00	0.34	0.94	1.63	2.22	2.69	3.16	3.55	3.87	4.10			
900	0.00	0.36	0.99	1.73	2.35	2.85	3.34	3.76	4.10	4.34			
950	0.00	0.38	1.05	1.83	2.48	3.01	3.53	3.97	4.32	4.58			
1000	0.00	0.40	1.10	1.92	2.62	3.17	3.71	4.18	4.55	4.82			
1050	0.00	0.42	1.16	2.02	2.75	3.33	3.90	4.39	4.78	5.06			
1100	0.00	0.44	1.21	2.11	2.88	3.49	4.08	4.60	5.01	5.30			
1150	0.00	0.47	1.27	2.21	3.01	3.64	4.27	4.80	5.23	5.54			
1200	0.00	0.49	1.32	2.31	3.14	3.80	4.45	5.01	5.46	5.79			
1250	0.00	0.51	1.38	2.40	3.27	3.96	4.64	5.22	5.69	6.03			
1300	0.00	0.53	1.43	2.50	3.40	4.12	4.83	5.43	5.92	6.27			
1350	0.00	0.55	1.49	2.59	3.53	4.28	5.01	5.64	6.14	6.51			
1400	0.00	0.57	1.54	2.69	3.66	4.44	5.20	5.85	6.37	6.75			
1450	0.00	0.59	1.60	2.79	3.79	4.60	5.38	6.06	6.60	6.99			
1500	0.00	0.61	1.65	2.88	3.92	4.75	5.57	6.27	6.83	7.23			
1550	0.00	0.63	1.71	2.98	4.05	4.91	5.75	6.48	7.05	7.47			
1600	0.00	0.65	1.76	3.07	4.18	5.07	5.94	6.68	7.28	7.71			
1650	0.00	0.67	1.82	3.17	4.32	5.23	6.13	6.89	7.51	7.95			
1700	0.00	0.69	1.87	3.27	4.45	5.39	6.31	7.10	7.74	8.20			
1750	0.00	0.71	1.93	3.36	4.58	5.55	6.50	7.31	7.96	8.44			
1800	0.00	0.73	1.98	3.46	4.71	5.71	6.68	7.52	8.19	8.68			
1850	0.00	0.75	2.04	3.55	4.84	5.86	6.87	7.73	8.42	8.92			
1900	0.00	0.77	2.09	3.65	4.97	6.02	7.05	7.94	8.65	9.16			
1950	0.00	0.79	2.15	3.75	5.10	6.18	7.24	8.15	8.88	9.40			
2000	0.00	0.81	2.20	3.84	5.23	6.34	7.42	8.36	9.10	9.64			
2050	0.00	0.83	2.26	3.94	5.36	6.50	7.61	8.56	9.33	9.88			
2100	0.00	0.85	2.31	4.03	5.49	6.66	7.80	8.77	9.56	10.12			
2150	0.00	0.87	2.37	4.13	5.62	6.81	7.98	8.98	9.79	10.36			
2200	0.00	0.89	2.43	4.23	5.75	6.97	8.17	9.19	10.01	10.61			
2250	0.00	0.91	2.48	4.32	5.88	7.13	8.35	9.40	10.24	10.85			
2300	0.00	0.93	2.54	4.42	6.02	7.29	8.54	9.61	10.47	11.09			
2350	0.00	0.95	2.59	4.52	6.15	7.45	8.72	9.82	10.70	11.33			
2400	0.00	0.97	2.65	4.61	6.28	7.61	8.91	10.03	10.92	11.57			
2450	0.00	0.99	2.70	4.71	6.41	7.77	9.09	10.24	11.15	11.81			
2500	0.00	1.01	2.76	4.80	6.54	7.92	9.28	10.44	11.38	0.00			

Belt length correction factor C_L

Belt ref.	RMA effective length mm	Corr. factor C _L
8V-1000	2540	0.87
8V-1060	2690	0.87
8V-1120	2845	0.88
8V-1180	2995	0.89
8V-1250	3175	0.90
8V-1320	3355	0.91
8V-1400	3555	0.92
8V-1500	3810	0.93
8V-1600	4065	0.93
8V-1700	4320	0.94
8V-1800	4570	0.95
8V-1900	4825	0.96
8V-2000	5080	0.97
8V-2120	5385	0.98
8V-2240	5690	0.98
8V-2360	5995	0.99
8V-2500	6350	1.00
8V-2650	6730	1.01
8V-2800	7110	1.02
8V-3000	7620	1.03
8V-3150	8000	1.03
8V-3350	8510	1.05
8V-3550	9015	1.05
8V-3750	9525	1.06
8V-4000	10160	1.07
8V-4500	11430	1.09
8V-4750	12065	1.09
8V-5000	12700	1.10
8V-5600	14225	1.12

The sizes printed in colour are available in 8V PowerBand®.
8V PowerBands are designed both for use in 8V and 25J pulleys.

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$

POWER RATINGS SUPER HC®

Basic kW per belt

8VK

RPM of faster shaft	425	437	450	462	475	487	500	515	530	545	560	600	630	670	710	750	800
585	36.5	38.8	41.4	43.8	46.3	48.6	51.2	54.0	56.9	59.8	62.6	70.1	75.6	82.9	90.0	97.0	105.5
700	41.6	44.4	47.3	50.1	53.0	55.7	58.6	61.9	65.2	68.5	71.7	80.2	86.5	94.6	102.6	110.3	119.7
725	42.7	45.5	48.5	51.3	54.4	57.1	60.1	63.5	66.9	70.2	73.5	82.3	88.6	97.0	105.1	112.9	122.4
870	48.2	51.5	55.0	58.2	61.6	64.8	68.1	72.0	75.8	79.6	83.3	92.9	100.0	109.1	117.8	126.1	135.9
950	50.9	54.4	58.1	61.5	65.1	68.4	72.0	76.1	80.0	84.0	87.9	97.9	105.2	114.5	123.3	131.7	141.4
1160	56.7	60.5	64.7	68.5	72.5	76.2	80.1	84.5	88.8	93.0	97.1	107.7	115.0				
1450	60.9	65.1	69.6	73.6	77.8	81.6	85.6	90.0									
1750	60.2																
2850																	
3450																	
50	4.6	4.9	5.1	5.4	5.6	5.9	6.2	6.5	6.8	7.1	7.4	8.2	8.8	9.7	10.5	11.3	12.3
100	8.4	8.9	9.4	9.9	10.4	10.9	11.4	12.0	12.6	13.2	13.8	15.3	16.5	18.1	19.6	21.2	23.1
150	11.9	12.6	13.4	14.1	14.8	15.5	16.3	17.1	18.0	18.9	19.7	22.0	23.7	26.0	28.2	30.5	33.2
200	15.2	16.2	17.1	18.0	19.0	19.9	20.9	22.0	23.2	24.3	25.4	28.4	30.6	33.5	36.4	39.3	43.0
250	18.4	19.5	20.7	21.8	23.0	24.1	25.3	26.7	28.1	29.5	30.8	34.5	36.1	40.4	43.6	47.8	52.3
300	21.4	22.7	24.1	25.5	26.9	28.2	29.6	31.2	32.9	34.5	36.1	40.4	43.6	47.8	52.0	56.1	61.3
350	24.3	25.8	27.4	29.0	30.6	32.1	33.7	35.6	37.4	39.3	41.1	46.0	49.7	54.5	59.3	64.0	69.9
400	27.1	28.8	30.6	32.3	34.2	35.9	37.7	39.8	41.9	44.0	46.0	51.5	55.6	61.0	66.4	71.6	78.2
450	29.7	31.6	33.7	35.6	37.6	39.5	41.5	43.8	46.1	48.5	50.7	56.8	61.3	67.3	73.1	78.9	86.1
500	32.3	34.4	36.6	38.7	40.9	43.0	45.2	47.7	50.3	52.8	55.3	61.9	66.8	73.3	79.6	85.9	93.6
550	34.8	37.0	39.5	41.7	44.1	46.4	48.8	51.5	54.2	57.0	59.7	66.8	72.1	79.0	85.9	92.6	100.8
600	37.2	39.6	42.2	44.6	47.2	49.6	52.2	55.1	58.0	61.0	63.9	71.5	77.1	84.5	91.8	98.9	107.5
650	39.4	42.0	44.8	47.4	50.2	52.7	55.4	58.6	61.7	64.8	67.9	76.0	81.9	89.7	97.3	104.8	113.8
700	41.6	44.4	47.3	50.1	53.0	55.7	58.6	61.9	65.2	68.5	71.7	80.2	86.5	94.6	102.6	110.3	119.7
750	43.7	46.6	49.7	52.6	55.7	58.5	61.6	65.1	68.5	71.9	75.3	84.2	90.8	99.3	107.5	115.5	125.1
800	45.7	48.7	52.0	55.0	58.3	61.2	64.4	68.1	71.7	75.2	78.8	88.0	94.8	103.6	112.0	120.2	129.9
850	47.5	50.7	54.2	57.3	60.7	63.8	67.1	70.9	74.6	78.4	82.0	91.6	98.6	107.6	116.2	124.5	134.3
900	49.3	52.6	56.2	59.5	63.0	66.2	69.6	73.6	77.4	81.3	85.1	94.9	102.0	111.2	120.0	128.3	138.1
950	50.9	54.4	58.1	61.5	65.1	68.4	72.0	76.1	80.0	84.0	87.9	97.9	105.2	114.5	123.3	131.7	141.4
1000	52.5	56.1	59.9	63.4	67.1	70.5	74.2	78.4	82.5	86.5	90.5	100.7	108.1	117.4	126.3	134.5	
1050	53.9	57.6	61.5	65.1	69.0	72.5	76.2	80.5	84.7	88.8	92.8	103.2	110.6	120.0	128.7		
1100	55.2	59.0	63.1	66.7	70.7	74.3	78.1	82.4	86.7	90.8	94.9	105.4	112.8	122.2			
1150	56.4	60.3	64.4	68.2	72.2	75.9	79.8	84.2	88.5	92.7	96.8	107.3	114.7				
1200	57.5	61.5	65.7	69.5	73.6	77.3	81.2	85.7	90.0	94.3	98.4	108.9	116.2				
1250	58.4	62.5	66.8	70.7	74.8	78.5	82.5	87.0	91.4	95.6	99.8	110.2					
1300	59.3	63.4	67.7	71.6	75.8	79.6	83.6	88.1	92.5	96.7	100.8						
1350	59.9	64.1	68.5	72.5	76.7	80.5	84.5	89.0	93.3	97.5	101.6						
1400	60.5	64.7	69.1	73.1	77.3	81.1	85.1	89.6	93.9	98.1							
1450	60.9	65.1	69.6	73.6	77.8	81.6	85.6	90.0									
1500	61.2	65.4	69.9	73.9	78.1	81.9	85.8										
1550	61.3	65.5	70.0	74.0	78.2	81.9											
1600	61.2	65.5	69.9	73.9	78.0												
1650	61.1	65.3	69.7	73.6													
1700	60.7	64.9															
1750	60.2																

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

$\frac{d \times \text{RPM}}{168124}$

6000 Hrs

$\frac{d \times \text{RPM}}{40933}$



POWER RATINGS SUPER HC®

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.21	1.22 to 1.29	1.3 to 1.46	>1.47	D - d / A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.51	1.02	1.53	2.04	2.55	3.06	3.57	4.08	4.60	0.00	180	1.00
700	0.00	0.61	1.23	1.83	2.45	3.05	3.66	4.28	4.89	5.50	0.10	174	0.99
725	0.00	0.63	1.27	1.90	2.53	3.16	3.80	4.43	5.06	5.70	0.20	169	0.97
870	0.00	0.76	1.52	2.28	3.04	3.80	4.55	5.31	6.07	6.84	0.30	163	0.96
950	0.00	0.83	1.66	2.49	3.32	4.15	4.97	5.80	6.63	7.47	0.40	157	0.94
1160	0.00	1.01	2.03	3.03	4.05	5.06	6.07	7.09	8.10	9.12	0.50	151	0.93
1450	0.00	1.26	2.54	3.79	5.07	6.33	7.59	8.86	10.12	11.40	0.60	145	0.91
1750	0.00	1.52	3.06	4.58	6.11	7.64	9.16	10.69	12.22	13.76	0.70	139	0.89
2850	0.00	2.48	4.99	7.46	9.96	12.44	14.92	17.41	19.90	22.41	0.80	133	0.87
3450	0.00	3.00	6.04	9.03	12.05	15.06	18.06	21.07	24.09	27.13	0.90	127	0.85
50	0.00	0.04	0.09	0.13	0.17	0.22	0.26	0.31	0.35	0.39	1.00	120	0.82
100	0.00	0.09	0.18	0.26	0.35	0.44	0.52	0.61	0.70	0.79	1.10	113	0.80
150	0.00	0.13	0.26	0.39	0.52	0.65	0.79	0.92	1.05	1.18	1.20	106	0.77
200	0.00	0.17	0.35	0.52	0.70	0.87	1.05	1.22	1.40	1.57	1.30	99	0.73
250	0.00	0.22	0.44	0.65	0.87	1.09	1.31	1.53	1.75	1.97	1.40	91	0.70
300	0.00	0.26	0.53	0.78	1.05	1.31	1.57	1.83	2.09	2.36	1.50	83	0.65
350	0.00	0.30	0.61	0.92	1.22	1.53	1.83	2.14	2.44	2.75			
400	0.00	0.35	0.70	1.05	1.40	1.75	2.09	2.44	2.79	3.14			
450	0.00	0.39	0.79	1.18	1.57	1.96	2.36	2.75	3.14	3.54			
500	0.00	0.43	0.88	1.31	1.75	2.18	2.62	3.05	3.49	3.93			
550	0.00	0.48	0.96	1.44	1.92	2.40	2.88	3.36	3.84	4.32			
600	0.00	0.52	1.05	1.57	2.10	2.62	3.14	3.66	4.19	4.72			
650	0.00	0.56	1.14	1.70	2.27	2.84	3.40	3.97	4.54	5.11			
700	0.00	0.61	1.23	1.83	2.45	3.05	3.66	4.28	4.89	5.50			
750	0.00	0.65	1.31	1.96	2.62	3.27	3.93	4.58	5.24	5.90			
800	0.00	0.70	1.40	2.09	2.80	3.49	4.19	4.89	5.59	6.29			
850	0.00	0.74	1.49	2.22	2.97	3.71	4.45	5.19	5.93	6.68			
900	0.00	0.78	1.58	2.35	3.14	3.93	4.71	5.50	6.28	7.08			
950	0.00	0.83	1.66	2.49	3.32	4.15	4.97	5.80	6.63	7.47			
1000	0.00	0.87	1.75	2.62	3.49	4.36	5.24	6.11	6.98	7.86			
1050	0.00	0.91	1.84	2.75	3.67	4.58	5.50	6.41	7.33	8.26			
1100	0.00	0.96	1.93	2.88	3.84	4.80	5.76	6.72	7.68	8.65			
1150	0.00	1.00	2.01	3.01	4.02	5.02	6.02	7.02	8.03	9.04			
1200	0.00	1.04	2.10	3.14	4.19	5.24	6.28	7.33	8.38	9.43			
1250	0.00	1.09	2.19	3.27	4.37	5.45	6.54	7.64	8.73	9.83			
1300	0.00	1.13	2.28	3.40	4.54	5.67	6.81	7.94	9.08	10.22			
1350	0.00	1.17	2.36	3.53	4.72	5.89	7.07	8.25	9.42	10.61			
1400	0.00	1.22	2.45	3.66	4.89	6.11	7.33	8.55	9.77	11.01			
1450	0.00	1.26	2.54	3.79	5.07	6.33	7.59	8.86	10.12	11.40			
1500	0.00	1.30	2.63	3.92	5.24	6.55	7.85	9.16	10.47	11.79			
1550	0.00	1.35	2.71	4.06	5.42	6.76	8.12	9.47	10.82	12.19			
1600	0.00	1.39	2.80	4.19	5.59	6.98	8.38	9.77	11.17	12.58			
1650	0.00	1.43	2.89	4.32	5.76	7.20	8.64	10.08	11.52	12.97			
1700	0.00	1.48	2.98	4.45	5.94	7.42	8.90	10.38	11.87	13.37			
1750	0.00	1.52	3.06	4.58	6.11	7.64	9.16	10.69	12.22	13.76			

Belt length correction factor C_L

Belt ref.	RMA effective length mm	Corr. factor C _L
8VK-1250	3175	0.90
8VK-1320	3355	0.91
8VK-1400	3555	0.92
8VK-1500	3810	0.93
8VK-1600	4065	0.93
8VK-1700	4320	0.94
8VK-1800	4570	0.95
8VK-1900	4825	0.96
8VK-2000	5080	0.97
8VK-2120	5385	0.98
8VK-2240	5690	0.98
8VK-2360	5995	0.99
8VK-2500	6350	1.00
8VK-2650	6730	1.01
8VK-2800	7110	1.02
8VK-3000	7620	1.03
8VK-3150	8000	1.03
8VK-3350	8510	1.05
8VK-3550	9015	1.05
8VK-3750	9525	1.06
8VK-4000	10160	1.07
8VK-4500	11430	1.09
8VK-4750	12065	1.09
8VK-5000	12700	1.10
8VK-5600	14225	1.12

We recommend that all 8VK PowerBand® be matched in sets to one single match number only. To help alleviate some matching problems, the 8VK belts are now available in 3, 4, 5, 8, 10 and 12 strands. These are to be ordered in minimum quantities. Consult your Gates representative.

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$

POWER RATINGS HI-POWER[®] MN / HI-POWER[®]

Basic kW per belt

All values printed in italics are for use with Hi-Power[®] Moulded Notch construction only.

Z

RPM of faster shaft	40	45	48	50	53	56	60	63	67	71	75	80	85	90	95	100	106
585	0.13	0.20	0.23	0.26	0.30	0.34	0.35	0.39	0.45	0.50	0.56	0.63	0.69	0.76	0.83	0.89	0.97
700	0.14	0.22	0.26	0.29	0.34	0.38	0.40	0.45	0.52	0.58	0.65	0.72	0.80	0.88	0.96	1.04	1.13
725	0.14	0.22	0.27	0.30	0.34	0.39	0.41	0.47	0.53	0.60	0.66	0.75	0.83	0.91	0.99	1.07	1.16
870	0.15	0.24	0.30	0.33	0.39	0.44	0.48	0.53	0.61	0.69	0.77	0.86	0.96	1.06	1.15	1.24	1.35
950	0.15	0.25	0.31	0.35	0.41	0.46	0.51	0.57	0.66	0.74	0.82	0.93	1.03	1.13	1.24	1.34	1.46
1160		0.28	0.35	0.39	0.46	0.53	0.59	0.66	0.76	0.86	0.96	1.09	1.21	1.33	1.45	1.57	1.72
1450		0.30	0.38	0.44	0.52	0.60	0.68	0.78	0.90	1.02	1.14	1.29	1.44	1.59	1.74	1.88	2.05
1750		0.31	0.41	0.48	0.57	0.67	0.78	0.89	1.03	1.17	1.32	1.49	1.67	1.84	2.01	2.18	2.38
2850			0.46	0.55	0.70	0.84	1.04	1.21	1.42	1.64	1.85	2.11	2.36	2.61	2.86	3.10	3.38
3450				0.57	0.73	0.90	1.14	1.34	1.59	1.83	2.07	2.37	2.66	2.94	3.22	3.49	3.80
100	0.04	0.06	0.07	0.07	0.08	0.09	0.09	0.09	0.10	0.12	0.13	0.14	0.15	0.17	0.18	0.19	0.21
200	0.07	0.10	0.11	0.12	0.14	0.15	0.15	0.17	0.19	0.21	0.23	0.25	0.28	0.31	0.33	0.36	0.39
300	0.09	0.13	0.15	0.17	0.19	0.21	0.21	0.23	0.26	0.29	0.33	0.37	0.41	0.46	0.50	0.55	0.60
400	0.11	0.16	0.18	0.20	0.23	0.26	0.26	0.29	0.33	0.37	0.41	0.46	0.50	0.55	0.60	0.65	0.70
500	0.12	0.18	0.21	0.24	0.27	0.30	0.31	0.35	0.40	0.44	0.49	0.55	0.61	0.67	0.72	0.78	0.85
600	0.13	0.20	0.24	0.26	0.30	0.34	0.36	0.40	0.46	0.51	0.57	0.64	0.71	0.78	0.84	0.91	0.99
700	0.14	0.22	0.26	0.29	0.34	0.38	0.40	0.45	0.52	0.58	0.65	0.72	0.80	0.88	0.96	1.04	1.13
800	0.15	0.23	0.28	0.32	0.37	0.42	0.45	0.50	0.57	0.65	0.72	0.81	0.90	0.98	1.07	1.16	1.26
900	0.15	0.25	0.30	0.34	0.39	0.45	0.49	0.55	0.63	0.71	0.79	0.89	0.99	1.08	1.18	1.28	1.39
1000	0.16	0.26	0.32	0.36	0.42	0.48	0.53	0.59	0.68	0.77	0.86	0.97	1.07	1.18	1.29	1.39	1.52
1100	0.16	0.27	0.34	0.38	0.44	0.51	0.56	0.64	0.73	0.83	0.92	1.04	1.16	1.28	1.39	1.51	1.64
1200	0.16	0.28	0.35	0.40	0.47	0.54	0.60	0.68	0.78	0.89	0.99	1.12	1.24	1.37	1.49	1.62	1.76
1300	0.16	0.29	0.36	0.41	0.49	0.56	0.63	0.72	0.83	0.94	1.05	1.19	1.32	1.46	1.59	1.72	1.88
1400	0.16	0.30	0.38	0.43	0.51	0.59	0.67	0.76	0.88	1.00	1.11	1.26	1.40	1.55	1.69	1.83	2.00
1500	0.16	0.30	0.39	0.44	0.53	0.61	0.70	0.80	0.92	1.05	1.17	1.33	1.48	1.63	1.78	1.93	2.11
1600		0.31	0.40	0.46	0.55	0.63	0.73	0.83	0.97	1.10	1.23	1.39	1.56	1.72	1.88	2.03	2.22
1700		0.31	0.41	0.47	0.56	0.66	0.76	0.87	1.01	1.15	1.29	1.46	1.63	1.80	1.97	2.13	2.33
1800		0.32	0.42	0.48	0.58	0.68	0.79	0.90	1.05	1.20	1.34	1.52	1.70	1.88	2.05	2.23	2.43
1900		0.32	0.42	0.49	0.59	0.70	0.82	0.94	1.09	1.25	1.40	1.59	1.77	1.96	2.14	2.32	2.53
2000		0.32	0.43	0.50	0.61	0.71	0.85	0.97	1.13	1.29	1.45	1.65	1.84	2.03	2.22	2.41	2.63
2100			0.44	0.51	0.62	0.73	0.87	1.00	1.17	1.34	1.50	1.71	1.91	2.11	2.31	2.50	2.73
2200			0.44	0.52	0.63	0.75	0.90	1.03	1.21	1.38	1.55	1.76	1.97	2.18	2.39	2.59	2.83
2300			0.44	0.53	0.65	0.76	0.92	1.06	1.24	1.42	1.60	1.82	2.04	2.25	2.46	2.67	2.92
2400			0.45	0.53	0.66	0.78	0.95	1.09	1.28	1.46	1.65	1.88	2.10	2.32	2.54	2.76	3.01
2500			0.45	0.54	0.67	0.79	0.97	1.12	1.31	1.50	1.70	1.93	2.16	2.39	2.61	2.84	3.10
2600			0.45	0.54	0.68	0.81	0.99	1.14	1.34	1.54	1.74	1.98	2.22	2.46	2.69	2.91	3.18
2700			0.46	0.55	0.68	0.82	1.01	1.17	1.38	1.58	1.78	2.03	2.28	2.52	2.76	2.99	3.27
2800			0.46	0.55	0.69	0.83	1.03	1.19	1.41	1.62	1.83	2.08	2.33	2.58	2.83	3.06	3.35
2900			0.46	0.56	0.70	0.84	1.05	1.22	1.44	1.65	1.87	2.13	2.39	2.64	2.89	3.14	3.42
3000			0.46	0.56	0.71	0.85	1.07	1.24	1.47	1.69	1.91	2.18	2.44	2.70	2.96	3.21	3.50
3100				0.56	0.71	0.86	1.09	1.26	1.50	1.72	1.95	2.22	2.49	2.76	3.02	3.27	3.57
3200				0.56	0.72	0.87	1.11	1.29	1.52	1.76	1.98	2.27	2.54	2.81	3.08	3.34	3.64
3300				0.56	0.72	0.88	1.12	1.31	1.55	1.79	2.02	2.31	2.59	2.87	3.14	3.40	3.71
3400				0.56	0.73	0.89	1.14	1.33	1.57	1.82	2.06	2.35	2.64	2.92	3.19	3.46	3.77
3500				0.57	0.73	0.90	1.15	1.34	1.60	1.85	2.09	2.39	2.68	2.97	3.25	3.52	3.83
3600				0.57	0.74	0.91	1.17	1.36	1.62	1.87	2.12	2.43	2.73	3.02	3.30	3.57	3.89
3700				0.56	0.74	0.91	1.18	1.38	1.64	1.90	2.15	2.46	2.77	3.06	3.35	3.62	3.94
3800				0.56	0.74	0.92	1.19	1.40	1.66	1.93	2.19	2.50	2.81	3.10	3.39	3.67	4.00
3900				0.56	0.75	0.93	1.20	1.41	1.68	1.95	2.21	2.53	2.84	3.15	3.44	3.72	4.05
4000					0.75	0.93	1.21	1.43	1.70	1.98	2.24	2.57	2.88	3.19	3.48	3.77	4.09
4200					0.75	0.94	1.23	1.45	1.74	2.02	2.29	2.63	2.95	3.26	3.56	3.85	4.18
4400					0.75	0.95	1.25	1.48	1.77	2.06	2.34	2.68	3.01	3.32	3.63	3.92	4.25
4600						0.96	1.26	1.49	1.80	2.09	2.38	2.73	3.06	3.38	3.69	3.98	4.31
4800						0.96	1.27	1.51	1.82	2.12	2.41	2.77	3.11	3.43	3.74	4.03	4.35
5000							1.28	1.52	1.84	2.15	2.44	2.80	3.14	3.47	3.77	4.06	4.38
5200							1.28	1.53	1.85	2.17	2.47	2.83	3.17	3.50	3.80	4.09	4.40
5400								1.53	1.86	2.18	2.49	2.85	3.19	3.52	3.82	4.10	4.40
5600								1.54	1.87	2.19	2.50	2.86	3.21	3.53	3.83	4.10	4.39
5800									1.87	2.19	2.50	2.87	3.21	3.53	3.82	4.08	4.36
6000									1.87	2.19	2.50	2.87	3.21	3.52	3.80	4.06	4.32

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs	12000 Hrs	6000 Hrs
0	$\frac{d \times RPM}{581734}$	$\frac{d \times RPM}{299133}$

POWER RATINGS HI-POWER® MN / HI-POWER®

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.06	1.07 to 1.08	1.09 to 1.12	1.13 to 1.16	1.17 to 1.22	1.23 to 1.32	1.33 to 1.5	>1.5	D - d / A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	0.00	180	1.00
700	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.05	0.06	0.10	174	0.99
725	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.20	169	0.97
870	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.30	163	0.96
950	0.00	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.08	0.40	157	0.94
1160	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.50	151	0.93
1450	0.00	0.01	0.03	0.04	0.05	0.07	0.08	0.09	0.11	0.12	0.60	145	0.91
1750	0.00	0.02	0.03	0.05	0.06	0.08	0.10	0.11	0.13	0.14	0.70	139	0.89
2850	0.00	0.03	0.05	0.08	0.10	0.13	0.16	0.18	0.21	0.23	0.80	133	0.87
3450	0.00	0.03	0.06	0.09	0.13	0.16	0.19	0.22	0.25	0.28	0.90	127	0.85
100	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	1.00	120	0.82
200	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02	1.10	113	0.80
300	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	1.20	106	0.77
400	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	1.30	99	0.73
500	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	1.40	91	0.70
600	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	1.50	83	0.65
700	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.05	0.06			
800	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.07			
900	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.07			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L	Belt ref.	ISO datum length mm	Corr. factor C _L
Z-17 1/2	470	0.73	Z-49	1270	1.04
Z-18 1/2	495	0.75	Z-50	1295	1.04
Z-19	505	0.75	Z-51	1320	1.05
Z-19 1/2	520	0.76	Z-52	1340	1.05
Z-20 1/2	550	0.78	Z-55	1420	1.70
Z-22	580	0.79	Z-57	1470	1.08
Z-22 1/2	595	0.80	Z-59	1520	1.09
Z-23 1/2	620	0.81	Z-63 1/2	1630	1.11
Z-24	630	0.82	Z-67	1720	1.13
Z-25	655	0.83	Z-71	1820	1.16
Z-26 1/2	695	0.85	Z-75	1920	1.16
Z-28	730	0.87			
Z-29	755	0.88			
Z-29 1/2	770	0.88			
Z-30 1/2	795	0.89			
Z-31	805	0.90			
Z-31 1/2	820	0.90			
Z-32 1/2	845	0.91			
Z-33 1/2	870	0.92			
Z-34 1/2	895	0.93			
Z-35 1/2	920	0.94			
Z-36	930	0.94			
Z-37	955	0.95			
Z-37 1/2	970	0.95			
Z-38 1/2	995	0.96			
Z-39	1005	0.96			
Z-39 1/2	1020	0.97			
Z-41 1/2	1070	0.98			
Z-42	1080	0.99			
Z-44	1140	1.00			
Z-45	1170	1.01			
Z-45 1/2	1180	1.01			
Z-46	1200	1.02			
Z-47	1220	1.02			
Z-48	1245	1.03			
Z-48 1/2	1255	1.03			

Number of belts required = $\frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$

POWER RATINGS HI-POWER® MN / HI-POWER®

Basic kW per belt

A

All values printed in italics are for use with Hi-Power® Moulded Notch construction only.

RPM of faster shaft	60	63	67	71	75	80	85	90	95	100	106	112	118	125	132	140	150	
585	0.34	0.39	0.47	0.55	0.62	0.72	0.77	0.88	0.98	1.09	1.21	1.34	1.46	1.61	1.75	1.91	2.11	
700	0.37	0.43	0.52	0.61	0.70	0.81	0.88	1.01	1.13	1.26	1.40	1.55	1.69	1.86	2.03	2.22	2.46	
725	0.37	0.44	0.53	0.62	0.71	0.83	0.91	1.04	1.16	1.29	1.44	1.59	1.74	1.92	2.09	2.29	2.53	
870	0.40	0.48	0.59	0.69	0.80	0.93	1.04	1.19	1.34	1.49	1.67	1.85	2.02	2.22	2.43	2.66	2.94	
950	0.41	0.50	0.61	0.73	0.84	0.98	1.11	1.27	1.43	1.60	1.79	1.98	2.17	2.39	2.61	2.85	3.16	
1160	0.43	0.53	0.67	0.81	0.94	1.11	1.28	1.47	1.67	1.86	2.09	2.31	2.54	2.80	3.06	3.35	3.71	
1450		0.57	0.73	0.89	1.05	1.25	1.49	1.73	1.96	2.19	2.47	2.74	3.01	3.32	3.63	3.98	4.41	
1750		0.58	0.77	0.96	1.15	1.38	1.68	1.96	2.23	2.50	2.83	3.14	3.46	3.82	4.17	4.58	5.07	
2850			0.79	1.07	1.34	1.68	2.20	2.60	2.99	3.38	3.84	4.28	4.72	5.21	5.68	6.21	6.83	
3450				1.05	1.37	1.77	2.35	2.80	3.24	3.68	4.18	4.67	5.13	5.66	6.16	6.69	7.31	
100	0.11	0.12	0.14	0.16	0.17	0.19	0.19	0.21	0.23	0.25	0.28	0.30	0.33	0.35	0.38	0.42	0.46	
200	0.18	0.20	0.23	0.26	0.29	0.33	0.33	0.37	0.41	0.45	0.50	0.54	0.59	0.65	0.70	0.76	0.84	
300	0.23	0.27	0.31	0.35	0.39	0.45	0.46	0.52	0.57	0.63	0.70	0.77	0.84	0.92	0.99	1.08	1.19	
400	0.28	0.32	0.37	0.43	0.48	0.55	0.57	0.65	0.72	0.80	0.89	0.98	1.07	1.17	1.27	1.39	1.53	
500	0.31	0.36	0.43	0.50	0.56	0.64	0.68	0.78	0.87	0.96	1.07	1.18	1.28	1.41	1.53	1.67	1.85	
600	0.34	0.40	0.48	0.56	0.63	0.73	0.79	0.89	1.00	1.11	1.24	1.37	1.49	1.64	1.79	1.95	2.16	
700	0.37	0.43	0.52	0.61	0.70	0.81	0.88	1.01	1.13	1.26	1.40	1.55	1.69	1.86	2.03	2.22	2.46	
800	0.39	0.46	0.56	0.66	0.76	0.88	0.98	1.12	1.26	1.40	1.56	1.73	1.89	2.08	2.27	2.48	2.74	
900	0.40	0.49	0.60	0.71	0.81	0.95	1.06	1.22	1.38	1.53	1.71	1.90	2.08	2.29	2.49	2.73	3.02	
1000	0.42	0.51	0.63	0.75	0.87	1.01	1.15	1.32	1.49	1.66	1.86	2.06	2.26	2.49	2.72	2.97	3.29	
1100	0.43	0.52	0.66	0.78	0.91	1.07	1.23	1.42	1.60	1.78	2.00	2.22	2.43	2.68	2.93	3.21	3.55	
1200	0.43	0.54	0.68	0.82	0.96	1.13	1.31	1.51	1.71	1.91	2.14	2.37	2.61	2.87	3.14	3.44	3.81	
1300	0.44	0.55	0.70	0.85	1.00	1.18	1.38	1.60	1.81	2.02	2.27	2.52	2.77	3.06	3.34	3.66	4.05	
1400	0.44	0.56	0.72	0.88	1.04	1.23	1.45	1.68	1.91	2.14	2.40	2.67	2.93	3.24	3.54	3.88	4.29	
1500	0.44	0.57	0.74	0.90	1.07	1.27	1.52	1.77	2.01	2.25	2.53	2.81	3.09	3.41	3.73	4.08	4.52	
1600	0.44	0.57	0.75	0.93	1.10	1.32	1.59	1.85	2.10	2.35	2.65	2.95	3.24	3.58	3.91	4.29	4.75	
1700	0.44	0.58	0.76	0.95	1.13	1.36	1.65	1.92	2.19	2.45	2.77	3.08	3.39	3.74	4.09	4.48	4.96	
1800	0.43	0.58	0.78	0.97	1.16	1.40	1.71	2.00	2.28	2.55	2.88	3.21	3.53	3.90	4.26	4.67	5.17	
1900	0.42	0.58	0.78	0.99	1.19	1.43	1.77	2.07	2.36	2.65	2.99	3.33	3.66	4.05	4.43	4.85	5.37	
2000	0.42	0.58	0.79	1.00	1.21	1.47	1.83	2.13	2.44	2.74	3.10	3.45	3.80	4.19	4.59	5.02	5.56	
2100		0.57	0.80	1.02	1.23	1.50	1.88	2.20	2.52	2.83	3.20	3.56	3.92	4.33	4.74	5.19	5.74	
2200		0.57	0.80	1.03	1.25	1.53	1.93	2.26	2.59	2.91	3.30	3.67	4.04	4.47	4.89	5.35	5.92	
2300		0.56	0.80	1.04	1.27	1.56	1.98	2.32	2.66	2.99	3.39	3.78	4.16	4.60	5.03	5.50	6.08	
2400		0.55	0.80	1.05	1.29	1.58	2.02	2.38	2.73	3.07	3.48	3.88	4.27	4.72	5.16	5.65	6.24	
2500		0.54	0.80	1.05	1.30	1.61	2.06	2.43	2.79	3.15	3.57	3.98	4.38	4.84	5.29	5.79	6.39	
2600		0.53	0.80	1.06	1.31	1.63	2.11	2.48	2.85	3.22	3.65	4.07	4.48	4.95	5.41	5.92	6.53	
2700		0.52	0.79	1.06	1.33	1.65	2.14	2.53	2.91	3.29	3.73	4.16	4.58	5.06	5.53	6.04	6.66	
2800		0.51	0.79	1.06	1.34	1.67	2.18	2.58	2.97	3.35	3.80	4.24	4.67	5.16	5.63	6.16	6.78	
2900		0.49	0.78	1.07	1.35	1.69	2.21	2.62	3.02	3.41	3.87	4.32	4.76	5.25	5.73	6.26	6.89	
3000			0.77	1.07	1.35	1.71	2.24	2.66	3.07	3.47	3.94	4.39	4.84	5.34	5.83	6.36	6.99	
3100			0.77	1.06	1.36	1.72	2.27	2.70	3.11	3.52	4.00	4.46	4.92	5.42	5.91	6.45	7.08	
3200			0.76	1.06	1.36	1.74	2.29	2.73	3.15	3.57	4.06	4.53	4.98	5.50	5.99	6.53	7.16	
3300			0.74	1.06	1.37	1.75	2.32	2.76	3.19	3.62	4.11	4.59	5.05	5.57	6.06	6.60	7.23	
3400			0.73	1.05	1.37	1.76	2.34	2.79	3.23	3.66	4.16	4.64	5.11	5.63	6.13	6.66	7.29	
3500			0.72	1.05	1.37	1.77	2.35	2.81	3.26	3.70	4.20	4.69	5.16	5.68	6.18	6.72	7.33	
3600			0.70	1.04	1.37	1.78	2.37	2.83	3.29	3.73	4.24	4.73	5.21	5.73	6.23	6.76	7.37	
3700			0.69	1.03	1.37	1.79	2.38	2.85	3.31	3.76	4.28	4.77	5.25	5.77	6.27	6.80	7.40	
3800			0.67	1.02	1.37	1.79	2.39	2.87	3.33	3.79	4.31	4.81	5.28	5.81	6.30	6.82	7.41	
3900			0.66	1.01	1.36	1.80	2.40	2.88	3.35	3.81	4.33	4.83	5.31	5.83	6.32	6.84	7.41	
4000				1.00	1.36	1.80	2.40	2.89	3.37	3.82	4.35	4.86	5.33	5.85	6.34	6.84	7.40	
4100				0.99	1.35	1.80	2.40	2.90	3.38	3.84	4.37	4.87	5.35	5.87	6.34	6.84	7.37	
4200				0.97	1.35	1.80	2.40	2.90	3.38	3.85	4.38	4.88	5.36	5.87	6.34	6.82	7.34	
4300				0.96	1.34	1.80	2.40	2.90	3.39	3.85	4.39	4.89	5.36	5.87	6.33	6.79	7.29	
4400				0.95	1.33	1.80	2.39	2.90	3.39	3.85	4.39	4.89	5.35	5.85	6.30	6.76	7.22	
4500				0.93	1.32	1.80	2.38	2.89	3.38	3.85	4.38	4.88	5.34	5.83	6.27	6.71	7.15	
4600				0.91	1.31	1.80	2.36	2.88	3.37	3.84	4.37	4.87	5.32	5.80	6.23	6.65	7.06	
4700				0.89	1.30	1.79	2.35	2.87	3.36	3.83	4.36	4.85	5.30	5.77	6.18	6.58	6.95	
4800				0.87	1.28	1.79	2.33	2.85	3.34	3.81	4.34	4.82	5.26	5.72	6.12	6.49	6.83	
4900				0.86	1.27	1.78	2.31	2.83	3.32	3.79	4.31	4.79		5.22	5.67	6.05	6.40	6.70
5000				0.83	1.26	1.77	2.28	2.80	3.30	3.76	4.28	4.75		5.17	5.61	5.97	6.29	6.55

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

12000 Hrs

6000 Hrs

0

$\frac{d \times \text{RPM}}{380518}$

$\frac{d \times \text{RPM}}{195695}$

POWER RATINGS HI-POWER® MN / HI-POWER®

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.06	1.07 to 1.08	1.09 to 1.12	1.13 to 1.16	1.17 to 1.22	1.23 to 1.32	1.33 to 1.5	>1.5	D - d / A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.10	0.00	180	1.00
700	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.10	0.11	0.13	0.10	174	0.99
725	0.00	0.01	0.03	0.04	0.06	0.07	0.09	0.10	0.12	0.13	0.20	169	0.97
870	0.00	0.02	0.03	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.30	163	0.96
950	0.00	0.02	0.04	0.06	0.08	0.09	0.11	0.13	0.15	0.17	0.40	157	0.94
1160	0.00	0.02	0.05	0.07	0.09	0.12	0.14	0.16	0.18	0.21	0.50	151	0.93
1450	0.00	0.03	0.06	0.09	0.12	0.14	0.17	0.20	0.23	0.26	0.60	145	0.91
1750	0.00	0.03	0.07	0.10	0.14	0.17	0.21	0.24	0.28	0.31	0.70	139	0.89
2850	0.00	0.06	0.11	0.17	0.23	0.28	0.34	0.40	0.45	0.51	0.80	133	0.87
3450	0.00	0.07	0.14	0.21	0.27	0.34	0.41	0.48	0.55	0.62	0.90	127	0.85
100	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	1.00	120	0.82
200	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.04	1.10	113	0.80
300	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.05	1.20	106	0.77
400	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.07	1.30	99	0.73
500	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	1.40	91	0.70
600	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.08	0.10	0.11	1.50	83	0.65
700	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.10	0.11	0.13			
800	0.00	0.02	0.03	0.05	0.06	0.08	0.10	0.11	0.13	0.14			
900	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.14	0.16			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L	Belt ref.	ISO datum length mm	Corr. factor C _L
A-21	570	0.70	A-68	1765	1.01
A-22	595	0.71	A-69	1790	1.01
A-23	620	0.72	A-70	1815	1.01
A-23 1/2	630	0.73	A-71	1840	1.02
A-24	645	0.73	A-72	1865	1.02
A-24 1/2	655	0.74	A-73	1890	1.02
A-25	680	0.75	A-74	1915	1.03
A-26	705	0.76	A-75	1940	1.03
A-27	720	0.76	A-76	1965	1.03
A-27 1/2	730	0.77	A-77	1990	1.04
A-28	745	0.77	A-78	2020	1.04
A-28 1/2	755	0.77	A-79	2040	1.05
A-29 1/2	780	0.78	A-80	2070	1.05
A-30	805	0.79	A-81	2095	1.05
A-31	825	0.80	A-82	2120	1.06
A-32	850	0.81	A-83	2145	1.06
A-33	875	0.81	A-84	2170	1.06
A-34	900	0.82	A-85	2195	1.07
A-35	925	0.83	A-86	2220	1.07
A-36	950	0.84	A-87	2245	1.07
A-37	975	0.84	A-88	2270	1.07
A-38	1000	0.85	A-89	2295	1.07
A-39	1025	0.86	A-90	2325	1.08
A-40	1055	0.87	A-91	2350	1.08
A-41	1080	0.87	A-92	2375	1.09
A-42	1105	0.88	A-93	2400	1.09
A-43	1130	0.88	A-94	2425	1.09
A-44	1155	0.89	A-95	2450	1.09
A-45	1180	0.90	A-96	2475	1.10
A-46	1205	0.90	A-97	2500	1.10
A-47	1230	0.91	A-98	2525	1.10
A-48	1255	0.91	A-100	2575	1.11
A-49	1280	0.92	A-102	2625	1.11
A-50	1310	0.92	A-104	2680	1.12
A-51	1330	0.93	A-105	2705	1.12
A-52	1355	0.93	A-108	2780	1.13
A-53	1385	0.94	A-110	2830	1.13
A-54	1410	0.94	A-112	2880	1.14
A-55	1435	0.95	A-118	3035	1.15
A-56	1460	0.95	A-120	3085	1.16
A-57	1485	0.96	A-124	3185	1.17
A-58	1510	0.96	A-128	3290	1.18
A-59	1535	0.97	A-130	3340	1.18
A-60	1560	0.97	A-134	3440	1.19
A-61	1585	0.98	A-136	3490	1.19
A-62	1610	0.98	A-140	3590	1.20
A-63	1635	0.98	A-144	3695	1.21
A-64	1660	0.99	A-147	3770	1.21
A-65	1690	0.99	A-158	4050	1.23
A-66	1715	1.00	A-173	4430	1.26
A-67	1735	1.00	A-180	4610	1.27

Number of belts required = $\frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$



POWER RATINGS HI-POWER[®] MN / HI-POWER[®]

Basic kW per belt

B

All values printed in italics are for use with Hi-Power[®] Moulded Notch construction only.

RPM of faster shaft	80	85	90	95	100	106	112	118	125	132	140	150	160	170	180	190	200
585	0.47	0.62	0.76	0.90	1.04	1.21	1.35	1.54	1.77	2.00	2.25	2.57	2.89	3.20	3.52	3.83	4.13
700	0.49	0.66	0.83	0.99	1.15	1.35	1.53	1.76	2.03	2.29	2.59	2.97	3.34	3.70	4.07	4.43	4.79
725	0.50	0.67	0.84	1.01	1.18	1.38	1.57	1.81	2.08	2.36	2.67	3.05	3.43	3.81	4.18	4.56	4.93
870	0.50	0.70	0.90	1.10	1.30	1.53	1.78	2.06	2.38	2.70	3.06	3.51	3.96	4.40	4.84	5.27	5.70
950	0.50	0.72	0.93	1.14	1.35	1.60	1.89	2.19	2.53	2.88	3.27	3.76	4.24	4.71	5.18	5.65	6.11
1160	0.47	0.73	0.98	1.23	1.48	1.77	2.14	2.50	2.91	3.32	3.78	4.36	4.92	5.48	6.03	6.57	7.11
1450			1.01	1.31	1.61	1.96	2.44	2.87	3.37	3.86	4.41	5.09	5.76	6.42	7.07	7.70	8.33
1750				1.35	1.70	2.11	2.69	3.19	3.76	4.33	4.97	5.75	6.51	7.26	7.98	8.69	9.38
2850					1.70	2.31	3.06	3.75	4.53	5.29	6.12	7.11	8.04	8.91	9.72	10.46	11.14
3450						2.24	2.89	3.63	4.46	5.24	6.09	7.06	7.94	8.72	9.39	9.95	10.39
50	0.11	0.13	0.15	0.16	0.18	0.20	0.19	0.21	0.24	0.26	0.29	0.32	0.36	0.39	0.43	0.46	0.49
100	0.19	0.22	0.25	0.28	0.31	0.34	0.34	0.38	0.43	0.47	0.52	0.59	0.65	0.72	0.78	0.84	0.91
150	0.24	0.29	0.33	0.37	0.42	0.47	0.47	0.53	0.60	0.66	0.74	0.83	0.93	1.02	1.11	1.20	1.29
200	0.29	0.35	0.40	0.46	0.51	0.58	0.60	0.67	0.76	0.84	0.94	1.06	1.18	1.30	1.42	1.54	1.66
250	0.33	0.40	0.47	0.53	0.60	0.68	0.71	0.80	0.91	1.01	1.13	1.28	1.43	1.58	1.72	1.87	2.01
300	0.36	0.44	0.52	0.60	0.68	0.78	0.82	0.92	1.05	1.17	1.32	1.49	1.67	1.84	2.01	2.18	2.35
350	0.39	0.48	0.57	0.67	0.76	0.86	0.92	1.04	1.19	1.33	1.49	1.69	1.90	2.09	2.29	2.49	2.68
400	0.41	0.52	0.62	0.72	0.83	0.95	1.02	1.16	1.32	1.48	1.66	1.89	2.12	2.34	2.56	2.79	3.01
450	0.44	0.55	0.66	0.78	0.89	1.02	1.11	1.27	1.45	1.63	1.83	2.08	2.33	2.58	2.83	3.08	3.32
500	0.45	0.58	0.70	0.83	0.95	1.09	1.20	1.37	1.57	1.77	1.99	2.27	2.54	2.82	3.09	3.36	3.63
550	0.47	0.60	0.74	0.87	1.01	1.16	1.29	1.47	1.69	1.90	2.15	2.45	2.75	3.05	3.34	3.64	3.93
600	0.48	0.63	0.77	0.91	1.06	1.23	1.37	1.57	1.81	2.04	2.30	2.63	2.95	3.27	3.59	3.91	4.22
650	0.49	0.64	0.80	0.95	1.11	1.29	1.45	1.67	1.92	2.17	2.45	2.80	3.15	3.49	3.83	4.17	4.51
700	0.49	0.66	0.83	0.99	1.15	1.35	1.53	1.76	2.03	2.29	2.59	2.97	3.34	3.70	4.07	4.43	4.79
750	0.50	0.68	0.85	1.03	1.20	1.40	1.61	1.85	2.13	2.42	2.74	3.13	3.53	3.91	4.30	4.68	5.06
800	0.50	0.69	0.87	1.06	1.24	1.46	1.68	1.94	2.24	2.54	2.88	3.29	3.71	4.12	4.53	4.93	5.33
850	0.50	0.70	0.89	1.09	1.28	1.51	1.75	2.02	2.34	2.65	3.01	3.45	3.89	4.32	4.75	5.17	5.59
900	0.50	0.71	0.91	1.12	1.32	1.56	1.82	2.11	2.44	2.77	3.14	3.61	4.06	4.52	4.97	5.41	5.85
950	0.50	0.72	0.93	1.14	1.35	1.60	1.89	2.19	2.53	2.88	3.27	3.76	4.24	4.71	5.18	5.65	6.11
1000	0.50	0.72	0.94	1.17	1.39	1.65	1.95	2.26	2.63	2.99	3.40	3.91	4.41	4.90	5.39	5.87	6.35
1050	0.49	0.72	0.96	1.19	1.42	1.69	2.01	2.34	2.72	3.10	3.52	4.05	4.57	5.09	5.59	6.10	6.59
1100	0.48	0.73	0.97	1.21	1.45	1.73	2.07	2.41	2.81	3.20	3.64	4.19	4.73	5.27	5.79	6.32	6.83
1150	0.47	0.73	0.98	1.23	1.47	1.77	2.13	2.49	2.90	3.30	3.76	4.33	4.89	5.44	5.99	6.53	7.06
1200			0.99	1.25	1.50	1.80	2.19	2.55	2.98	3.40	3.88	4.46	5.04	5.62	6.18	6.74	7.29
1250			0.99	1.26	1.53	1.84	2.24	2.62	3.06	3.50	3.99	4.60	5.20	5.79	6.37	6.94	7.51
1300			1.00	1.28	1.55	1.87	2.29	2.69	3.14	3.59	4.10	4.73	5.34	5.95	6.55	7.14	7.72
1350			1.00	1.29	1.57	1.90	2.35	2.75	3.22	3.68	4.21	4.85	5.49	6.11	6.73	7.33	7.93
1400			1.01	1.30	1.59	1.93	2.40	2.81	3.30	3.77	4.31	4.97	5.63	6.27	6.90	7.52	8.13
1450			1.01	1.31	1.61	1.96	2.44	2.87	3.37	3.86	4.41	5.09	5.76	6.42	7.07	7.70	8.33
1500			1.01	1.32	1.63	1.99	2.49	2.93	3.44	3.94	4.51	5.21	5.90	6.57	7.23	7.88	8.52
1600			1.01	1.33	1.66	2.04	2.57	3.04	3.58	4.11	4.70	5.43	6.15	6.86	7.55	8.22	8.88
1700				1.34	1.68	2.09	2.65	3.14	3.70	4.26	4.88	5.65	6.39	7.13	7.84	8.54	9.22
1800				1.35	1.71	2.13	2.73	3.24	3.82	4.40	5.05	5.84	6.62	7.38	8.12	8.84	9.54
1900				1.35	1.72	2.16	2.79	3.32	3.93	4.53	5.21	6.03	6.83	7.62	8.37	9.11	9.83
2000				1.35	1.74	2.19	2.85	3.40	4.03	4.66	5.35	6.20	7.03	7.83	8.61	9.36	10.09
2100					1.75	2.22	2.90	3.47	4.13	4.77	5.49	6.36	7.21	8.03	8.83	9.59	10.32
2200					1.75	2.25	2.95	3.54	4.21	4.87	5.61	6.51	7.38	8.21	9.02	9.79	10.53
2300					1.75	2.26	2.99	3.59	4.29	4.97	5.72	6.64	7.53	8.38	9.19	9.97	10.71
2400						2.28	3.02	3.64	4.35	5.05	5.82	6.76	7.66	8.52	9.34	10.12	10.86
2500						2.29	3.04	3.68	4.41	5.12	5.91	6.86	7.77	8.64	9.47	10.25	10.98
2600						2.30	3.06	3.71	4.46	5.18	5.99	6.95	7.87	8.75	9.57	10.34	11.06
2700							3.07	3.73	4.50	5.23	6.05	7.03	7.95	8.83	9.65	10.41	11.12
2800							3.07	3.75	4.52	5.27	6.10	7.08	8.01	8.89	9.70	10.45	11.14
2900								3.76	4.54	5.30	6.14	7.13	8.06	8.93	9.73	10.46	11.12
3000								3.75	4.55	5.32	6.16	7.15	8.08	8.94	9.73	10.44	11.08
3100									4.55	5.32	6.17	7.16	8.09	8.93	9.70	10.39	10.99
3200										5.32	6.16	7.16	8.07	8.90	9.65	10.31	10.87
3300											6.14	7.13	8.03	8.85	9.57	10.19	10.71
3400												7.09	7.98	8.77	9.46	10.04	10.51
3500													7.90	8.66	9.31	9.85	10.27

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

12000 Hrs

6000 Hrs

0

$d \times RPM$
246609

$d \times RPM$
126823



POWER RATINGS HI-POWER® MN / HI-POWER®

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft											D - d A	Arc of contact on small pulley (degrees)	Factor G			
	1 to 1.01	1.02 to 1.03	1.04 to 1.06	1.07 to 1.08	1.09 to 1.12	1.13 to 1.16	1.17 to 1.22	1.23 to 1.32	1.33 to 1.5	>1.5						
585	0.00	0.03	0.05	0.08	0.10	0.13	0.15	0.18	0.21	0.23	0.00	180	1.00			
700	0.00	0.03	0.06	0.09	0.12	0.15	0.18	0.22	0.25	0.28	0.10	174	0.99			
725	0.00	0.03	0.06	0.10	0.13	0.16	0.19	0.22	0.26	0.29	0.20	169	0.97			
870	0.00	0.04	0.08	0.11	0.15	0.19	0.23	0.27	0.31	0.34	0.30	163	0.96			
950	0.00	0.04	0.08	0.13	0.17	0.21	0.25	0.29	0.33	0.38	0.40	157	0.94			
1160	0.00	0.05	0.10	0.15	0.20	0.26	0.31	0.36	0.41	0.46	0.50	151	0.93			
1450	0.00	0.06	0.13	0.19	0.25	0.32	0.38	0.45	0.51	0.57	0.60	145	0.91			
1750	0.00	0.08	0.15	0.23	0.31	0.38	0.46	0.54	0.62	0.69	0.70	139	0.89			
2850	0.00	0.13	0.25	0.38	0.50	0.63	0.75	0.88	1.00	1.13	0.80	133	0.87			
3450	0.00	0.15	0.30	0.46	0.61	0.76	0.91	1.06	1.21	1.36	0.90	127	0.85			
50	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	1.00	120	0.82			
100	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	1.10	113	0.80			
150	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.06	1.20	106	0.77			
200	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.07	0.08	1.30	99	0.73			
250	0.00	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	1.40	91	0.70			
300	0.00	0.01	0.03	0.04	0.05	0.07	0.08	0.09	0.11	0.12	1.50	83	0.65			
350	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.12	0.14						
400	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.12	0.14	0.16						
450	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18						
500	0.00	0.02	0.04	0.07	0.09	0.11	0.13	0.15	0.18	0.20						
550	0.00	0.02	0.05	0.07	0.10	0.12	0.15	0.17	0.19	0.22						
600	0.00	0.03	0.05	0.08	0.11	0.13	0.16	0.18	0.21	0.24						
650	0.00	0.03	0.06	0.09	0.11	0.14	0.17	0.20	0.23	0.26						
700	0.00	0.03	0.06	0.09	0.12	0.15	0.18	0.22	0.25	0.28						
750	0.00	0.03	0.07	0.10	0.13	0.16	0.20	0.23	0.26	0.30	B-25	695	0.70	B-84	2185	0.99
800	0.00	0.04	0.07	0.11	0.14	0.18	0.21	0.25	0.28	0.32	B-26	710	0.70	B-85	2210	0.99
850	0.00	0.04	0.07	0.11	0.15	0.19	0.22	0.26	0.30	0.34	B-27	735	0.71	B-86	2235	0.99
900	0.00	0.04	0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36	B-27 1/2	745	0.72	B-87	2260	1.00
950	0.00	0.04	0.08	0.13	0.17	0.21	0.25	0.29	0.33	0.38	B-28	770	0.72	B-88	2285	1.00
1000	0.00	0.04	0.09	0.13	0.18	0.22	0.26	0.31	0.35	0.40	B-29	795	0.73	B-89	2310	1.00
1050	0.00	0.05	0.09	0.14	0.18	0.23	0.28	0.32	0.37	0.42	B-30	815	0.74	B-90	2335	1.01
1100	0.00	0.05	0.10	0.15	0.19	0.24	0.29	0.34	0.39	0.44	B-31	845	0.75	B-91	2365	1.01
1150	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	B-32	870	0.76	B-92	2390	1.01
1200	0.00	0.05	0.11	0.16	0.21	0.26	0.32	0.37	0.42	0.47	B-33	895	0.76	B-93	2415	1.01
1250	0.00	0.05	0.11	0.17	0.22	0.27	0.33	0.38	0.44	0.49	B-34	920	0.77	B-94	2440	1.02
1300	0.00	0.06	0.11	0.17	0.23	0.29	0.34	0.40	0.46	0.51	B-35	940	0.78	B-95	2465	1.02
1350	0.00	0.06	0.12	0.18	0.24	0.30	0.36	0.42	0.48	0.53	B-36	965	0.78	B-96	2490	1.02
1400	0.00	0.06	0.12	0.19	0.25	0.31	0.37	0.43	0.49	0.55	B-37	990	0.79	B-97	2515	1.02
1450	0.00	0.06	0.13	0.19	0.25	0.32	0.38	0.45	0.51	0.57	B-38	1015	0.79	B-98	2540	1.03
1500	0.00	0.07	0.13	0.20	0.26	0.33	0.40	0.46	0.53	0.59	B-39	1040	0.80	B-99	2565	1.03
1600	0.00	0.07	0.14	0.21	0.28	0.35	0.42	0.49	0.56	0.63	B-40	1065	0.81	B-100	2590	1.03
1700	0.00	0.07	0.15	0.22	0.30	0.37	0.45	0.52	0.60	0.67	B-41	1095	0.81	B-102	2640	1.04
1800	0.00	0.08	0.16	0.24	0.32	0.40	0.48	0.55	0.63	0.71	B-42	1120	0.82	B-103	2665	1.04
1900	0.00	0.08	0.17	0.25	0.33	0.42	0.50	0.58	0.67	0.75	B-43	1145	0.83	B-104	2695	1.04
2000	0.00	0.09	0.18	0.26	0.35	0.44	0.53	0.62	0.70	0.79	B-44	1170	0.83	B-105	2720	1.04
2100	0.00	0.09	0.18	0.28	0.37	0.46	0.55	0.65	0.74	0.83	B-45	1195	0.84	B-106	2745	1.05
2200	0.00	0.10	0.19	0.29	0.39	0.48	0.58	0.68	0.77	0.87	B-46	1220	0.84	B-108	2795	1.05
2300	0.00	0.10	0.20	0.30	0.40	0.51	0.61	0.71	0.81	0.91	B-47	1245	0.85	B-110	2845	1.06
2400	0.00	0.11	0.21	0.32	0.42	0.53	0.63	0.74	0.84	0.95	B-48	1270	0.85	B-112	2895	1.06
2500	0.00	0.11	0.22	0.33	0.44	0.55	0.66	0.77	0.88	0.99	B-49	1295	0.86	B-114	2945	1.06
2600	0.00	0.11	0.23	0.34	0.46	0.57	0.69	0.80	0.91	1.03	B-50	1320	0.86	B-116	3000	1.07
2700	0.00	0.12	0.24	0.36	0.47	0.59	0.71	0.83	0.95	1.07	B-51	1345	0.87	B-118	3050	1.07
2800	0.00	0.12	0.25	0.37	0.49	0.62	0.74	0.86	0.99	1.11	B-52	1370	0.87	B-120	3100	1.08
2900	0.00	0.13	0.26	0.38	0.51	0.64	0.77	0.89	1.02	1.15	B-53	1395	0.88	B-124	3200	1.09
3000	0.00	0.13	0.26	0.40	0.53	0.66	0.79	0.92	1.06	1.19	B-54	1425	0.88	B-128	3300	1.09
3100	0.00	0.14	0.27	0.41	0.55	0.68	0.82	0.95	1.09	1.23	B-55	1450	0.89	B-131	3380	1.10
3200	0.00	0.14	0.28	0.42	0.56	0.70	0.84	0.98	1.13	1.27	B-56	1475	0.89	B-133	3430	1.10
3300	0.00	0.15	0.29	0.44	0.58	0.73	0.87	1.01	1.16	1.31	B-57	1500	0.89	B-134	3455	1.10
3400	0.00	0.15	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	B-58	1525	0.90	B-136	3505	1.11
3500	0.00	0.15	0.31	0.46	0.62	0.77	0.92	1.08	1.23	1.38	B-59	1550	0.90	B-140	3610	1.12
											B-60	1575	0.91	B-144	3710	1.12
											B-61	1600	0.91	B-147	3785	1.13
											B-62	1625	0.91	B-148	3810	1.13
											B-63	1650	0.92	B-152	3910	1.14
											B-64	1675	0.92	B-157	4040	1.14
											B-65	1700	0.93	B-158	4065	1.15
											B-66	1730	0.93	B-162	4165	1.15
											B-67	1755	0.93	B-165	4240	1.16
											B-68	1780	0.94	B-167	4295	1.16
											B-69	1805	0.94	B-173	4445	1.17
											B-70	1830	0.94	B-177	4545	1.17
											B-71	1855	0.95	B-180	4625	1.18
											B-72	1880	0.95	B-186	4775	1.19
											B-73	1905	0.95	B-195	5005	1.20
											B-74	1930	0.96	B-196	5030	1.20
											B-75	1955	0.96	B-208	5335	1.21
											B-76	1980	0.96	B-210	5385	1.22
											B-77	2005	0.97	B-221	5625	1.23
											B-78	2030	0.97	B-225	5730	1.23
											B-79	2060	0.97	B-240	6110	1.25
											B-80	2085	0.98	B-241	6340	1.26
											B-81	2110	0.98	B-270	6870	1.28
											B-82	2135	0.98	B-300	7635	1.31
											B-83	2160	0.99			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L	Belt ref.	ISO datum length mm	Corr. factor C _L
B-84	2185	0.99	B-208	5335	1.21
B-85	2210	0.99	B-210	5385	1.22
B-86	2235	0.99	B-221	5625	1.23
B-87	2260	1.00	B-225	5730	1.23
B-88	2285	1.00	B-240	6110	1.25
B-89	2310	1.00	B-241	6340	1.26
B-90	2335	1.01	B-270	6870	1.28
B-91	2365	1.01	B-300	7635	1.31
B-92	2390	1.01			
B-93	2415	1.01			
B-94	2440	1.02			
B-95	2465	1.02			
B-96	2490	1.02			
B-97	2515	1.02			
B-98	2540	1.03		</	

POWER RATINGS HI-POWER® MN / HI-POWER®

C

Basic kW per belt

All values printed in italics are for use with Hi-Power® Moulded Notch construction only.

RPM of faster shaft	150	160	170	180	190	200	212	224	236	250	265	280	300	315	335	355
585	2.91	3.28	3.64	4.04	4.54	5.02	5.61	6.18	6.75	7.42	8.12	8.81	9.73	10.41	11.31	12.19
700	3.24	3.67	4.08	4.63	5.20	5.77	6.45	7.12	7.78	8.55	9.37	10.17	11.23	12.01	13.04	14.05
725	3.31	3.75	4.18	4.75	5.34	5.93	6.62	7.32	8.00	8.79	9.63	10.45	11.54	12.34	13.40	14.43
870	3.67	4.17	4.66	5.42	6.11	6.79	7.60	8.40	9.19	10.10	11.06	12.01	13.25	14.16	15.36	16.52
950	3.84	4.38	4.90	5.76	6.50	7.23	8.10	8.96	9.80	10.78	11.80	12.81	14.12	15.09	16.34	17.57
1160	4.24	4.86	5.47	6.58	7.44	8.29	9.30	10.29	11.27	12.38	13.55	14.69	16.16	17.23	18.60	19.92
1450	4.65	5.38	6.10	7.50	8.51	9.51	10.67	11.81	12.92	14.18	15.47	16.72	18.31	19.43	20.85	22.16
1750	4.95	5.78	6.59	8.20	9.33	10.43	11.71	12.95	14.14	15.47	16.81	18.07	19.62	20.68	21.94	23.03
2850		6.15	7.22	8.20	9.39	10.47	11.62	12.59	13.39	14.09	14.54					
3450				6.17	7.07	7.78	8.38									
50	0.48	0.53	0.58	0.53	0.59	0.64	0.70	0.77	0.83	0.90	0.98	1.06	1.16	1.23	1.34	1.44
100	0.84	0.92	1.01	0.96	1.07	1.16	1.28	1.40	1.52	1.66	1.80	1.95	2.14	2.28	2.47	2.66
150	1.14	1.26	1.38	1.36	1.50	1.64	1.82	1.99	2.16	2.36	2.57	2.78	3.06	3.26	3.54	3.81
200	1.41	1.56	1.71	1.72	1.91	2.10	2.32	2.54	2.76	3.02	3.29	3.57	3.93	4.20	4.55	4.91
250	1.65	1.84	2.02	2.06	2.29	2.52	2.80	3.07	3.34	3.65	3.99	4.32	4.76	5.09	5.53	5.96
300	1.88	2.09	2.30	2.39	2.66	2.93	3.26	3.58	3.90	4.27	4.66	5.05	5.57	5.95	6.47	6.97
350	2.09	2.33	2.57	2.71	3.02	3.33	3.70	4.07	4.43	4.86	5.31	5.76	6.35	6.79	7.38	7.96
400	2.28	2.55	2.82	3.01	3.36	3.71	4.13	4.54	4.95	5.43	5.94	6.44	7.11	7.60	8.26	8.91
450	2.47	2.77	3.06	3.30	3.69	4.08	4.54	5.00	5.46	5.99	6.55	7.11	7.84	8.39	9.12	9.83
500	2.64	2.97	3.29	3.59	4.01	4.44	4.95	5.45	5.95	6.53	7.14	7.75	8.56	9.16	9.95	10.73
550	2.80	3.15	3.50	3.86	4.32	4.79	5.34	5.89	6.43	7.06	7.72	8.38	9.26	9.90	10.76	11.60
600	2.96	3.33	3.70	4.12	4.63	5.12	5.72	6.31	6.89	7.57	8.29	9.00	9.93	10.63	11.54	12.44
650	3.11	3.50	3.90	4.38	4.92	5.45	6.09	6.72	7.34	8.07	8.83	9.59	10.59	11.33	12.30	13.26
700	3.24	3.67	4.08	4.63	5.20	5.77	6.45	7.12	7.78	8.55	9.37	10.17	11.23	12.01	13.04	14.05
750	3.38	3.82	4.26	4.87	5.48	6.08	6.80	7.51	8.21	9.02	9.88	10.73	11.85	12.67	13.75	14.81
800	3.50	3.97	4.43	5.10	5.75	6.38	7.14	7.89	8.63	9.48	10.39	11.28	12.45	13.31	14.44	15.54
850	3.62	4.11	4.60	5.33	6.00	6.67	7.47	8.25	9.03	9.93	10.87	11.80	13.02	13.92	15.10	16.25
900	3.73	4.25	4.75	5.55	6.26	6.96	7.79	8.61	9.42	10.36	11.34	12.32	13.58	14.52	15.73	16.92
950	3.84	4.38	4.90	5.76	6.50	7.23	8.10	8.96	9.80	10.78	11.80	12.81	14.12	15.09	16.34	17.57
1000	3.94	4.50	5.05	5.97	6.74	7.50	8.40	9.29	10.17	11.18	12.24	13.28	14.64	15.64	16.93	18.18
1050	4.04	4.62	5.19	6.16	6.96	7.76	8.69	9.62	10.53	11.57	12.67	13.74	15.14	16.16	17.48	18.76
1100	4.13	4.73	5.32	6.35	7.19	8.01	8.98	9.93	10.87	11.95	13.08	14.18	15.62	16.66	18.01	19.31
1150	4.22	4.84	5.44	6.54	7.40	8.25	9.25	10.23	11.20	12.31	13.47	14.60	16.07	17.14	18.51	19.83
1200	4.30	4.94	5.57	6.72	7.60	8.48	9.51	10.53	11.52	12.66	13.85	15.01	16.50	17.59	18.98	20.31
1250	4.38	5.04	5.68	6.89	7.80	8.70	9.76	10.81	11.83	12.99	14.21	15.39	16.91	18.01	19.42	20.75
1300	4.45	5.13	5.79	7.05	7.99	8.92	10.01	11.07	12.12	13.31	14.55	15.75	17.30	18.41	19.82	21.16
1350	4.52	5.22	5.90	7.21	8.17	9.12	10.24	11.33	12.40	13.61	14.88	16.10	17.66	18.78	20.20	21.53
1400	4.59	5.30	6.00	7.36	8.35	9.32	10.46	11.58	12.67	13.90	15.19	16.42	18.00	19.12	20.54	21.87
1450	4.65	5.38	6.10	7.50	8.51	9.51	10.67	11.81	12.92	14.18	15.47	16.72	18.31	19.43	20.85	22.16
1500	4.71	5.46	6.19	7.63	8.67	9.68	10.87	12.03	13.16	14.43	15.75	17.00	18.60	19.72	21.12	22.41
1550	4.76	5.53	6.28	7.76	8.82	9.85	11.06	12.24	13.38	14.67	16.00	17.26	18.86	19.97	21.36	22.62
1600	4.81	5.60	6.36	7.88	8.96	10.01	11.24	12.44	13.60	14.90	16.23	17.50	19.09	20.20	21.56	22.79
1650	4.86	5.66	6.44	7.99	9.09	10.16	11.41	12.62	13.79	15.10	16.44	17.71	19.29	20.39	21.73	22.92
1700	4.91	5.72	6.52	8.10	9.21	10.30	11.57	12.79	13.97	15.29	16.64	17.91	19.47	20.55	21.86	23.00
1750	4.95	5.78	6.59	8.20	9.33	10.43	11.71	12.95	14.14	15.47	16.81	18.07	19.62	20.68	21.94	23.03
1800	4.98	5.83	6.66	8.29	9.44	10.55	11.85	13.09	14.29	15.62	16.96	18.21	19.74	20.77	21.99	23.02
1850	5.02	5.88	6.72	8.37	9.53	10.66	11.97	13.23	14.43	15.76	17.09	18.33	19.83	20.83	22.00	22.96
1900	5.05	5.92	6.78	8.44	9.62	10.76	12.08	13.34	14.55	15.87	17.20	18.42	19.89	20.86	21.97	22.85
1950	5.07	5.96	6.84	8.51	9.70	10.85	12.18	13.44	14.65	15.97	17.29	18.49	19.92	20.85	21.89	22.69
2000	5.10	6.00	6.89	8.57	9.77	10.93	12.26	13.53	14.74	16.05	17.35	18.53	19.91	20.80	21.77	22.48
2100	5.14	6.07	6.98	8.66	9.88	11.05	12.40	13.67	14.86	16.15	17.41	18.53	19.81	20.59	21.39	21.90
2200		6.12	7.06	8.72	9.95	11.13	12.48	13.74	14.91	16.17	17.37	18.42	19.57	20.23	20.83	
2300		6.16	7.12	8.74	9.98	11.17	12.51	13.75	14.89	16.10	17.23	18.19	19.18	19.70		
2400		6.19	7.17	8.73	9.97	11.15	12.48	13.69	14.80	15.95	16.99	17.84	18.65	19.01		
2500			7.20	8.68	9.92	11.09	12.39	13.57	14.63	15.70	16.65	17.37	17.97			
2600			7.22	8.59	9.83	10.98	12.25	13.38	14.38	15.36	16.19	16.77				
2700				8.46	9.69	10.82	12.04	13.12	14.05	14.93	15.62	16.03				
2800					9.50	10.60	11.77	12.79	13.63	14.40	14.93					
2900						10.33	11.44	12.38	13.13	13.76						
3000							11.04	11.89	12.54	13.01						

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

$\frac{d \times \text{RPM}}{162549}$

6000 Hrs

$\frac{d \times \text{RPM}}{83612}$



POWER RATINGS HI-POWER[®] MN / HI-POWER[®]

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.06	1.07 to 1.08	1.09 to 1.12	1.13 to 1.16	1.17 to 1.22	1.23 to 1.32	1.33 to 1.5	>1.5
585	0.00	0.06	0.11	0.17	0.22	0.28	0.33	0.39	0.44	0.50
700	0.00	0.07	0.13	0.20	0.26	0.33	0.40	0.46	0.53	0.59
725	0.00	0.07	0.14	0.21	0.27	0.34	0.41	0.48	0.55	0.61
870	0.00	0.08	0.16	0.25	0.33	0.41	0.49	0.57	0.66	0.74
950	0.00	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.72	0.81
1160	0.00	0.11	0.22	0.33	0.44	0.55	0.66	0.76	0.87	0.98
1450	0.00	0.14	0.27	0.41	0.55	0.68	0.82	0.96	1.09	1.23
1750	0.00	0.17	0.33	0.50	0.66	0.82	0.99	1.15	1.32	1.48
2850	0.00	0.27	0.54	0.81	1.07	1.34	1.61	1.88	2.15	2.42
3450	0.00	0.33	0.65	0.98	1.30	1.63	1.95	2.27	2.60	2.93
50	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04
100	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08
150	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.10	0.11	0.13
200	0.00	0.02	0.04	0.06	0.08	0.09	0.11	0.13	0.15	0.17
250	0.00	0.02	0.05	0.07	0.09	0.12	0.14	0.16	0.19	0.21
300	0.00	0.03	0.06	0.08	0.11	0.14	0.17	0.20	0.23	0.25
350	0.00	0.03	0.07	0.10	0.13	0.16	0.20	0.23	0.26	0.30
400	0.00	0.04	0.08	0.11	0.15	0.19	0.23	0.26	0.30	0.34
450	0.00	0.04	0.08	0.13	0.17	0.21	0.25	0.30	0.34	0.38
500	0.00	0.05	0.09	0.14	0.19	0.24	0.28	0.33	0.38	0.42
550	0.00	0.05	0.10	0.16	0.21	0.26	0.31	0.36	0.41	0.47
600	0.00	0.06	0.11	0.17	0.23	0.28	0.34	0.40	0.45	0.51
650	0.00	0.06	0.12	0.18	0.24	0.31	0.37	0.43	0.49	0.55
700	0.00	0.07	0.13	0.20	0.26	0.33	0.40	0.46	0.53	0.59
750	0.00	0.07	0.14	0.21	0.28	0.35	0.42	0.49	0.57	0.64
800	0.00	0.08	0.15	0.23	0.30	0.38	0.45	0.53	0.60	0.68
850	0.00	0.08	0.16	0.24	0.32	0.40	0.48	0.56	0.64	0.72
900	0.00	0.08	0.17	0.25	0.34	0.42	0.51	0.59	0.68	0.76
950	0.00	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.72	0.81
1000	0.00	0.09	0.19	0.28	0.38	0.47	0.57	0.66	0.75	0.85
1050	0.00	0.10	0.20	0.30	0.40	0.49	0.59	0.69	0.79	0.89
1100	0.00	0.10	0.21	0.31	0.41	0.52	0.62	0.73	0.83	0.93
1150	0.00	0.11	0.22	0.33	0.43	0.54	0.65	0.76	0.87	0.98
1200	0.00	0.11	0.23	0.34	0.45	0.57	0.68	0.79	0.91	1.02
1250	0.00	0.12	0.24	0.35	0.47	0.59	0.71	0.82	0.94	1.06
1300	0.00	0.12	0.25	0.37	0.49	0.61	0.74	0.86	0.98	1.10
1350	0.00	0.13	0.25	0.38	0.51	0.64	0.76	0.89	1.02	1.14
1400	0.00	0.13	0.26	0.40	0.53	0.66	0.79	0.92	1.06	1.19
1450	0.00	0.14	0.27	0.41	0.55	0.68	0.82	0.96	1.09	1.23
1500	0.00	0.14	0.28	0.42	0.57	0.71	0.85	0.99	1.13	1.27
1550	0.00	0.15	0.29	0.44	0.58	0.73	0.88	1.02	1.17	1.31
1600	0.00	0.15	0.30	0.45	0.60	0.75	0.91	1.05	1.21	1.36
1650	0.00	0.16	0.31	0.47	0.62	0.78	0.93	1.09	1.24	1.40
1700	0.00	0.16	0.32	0.48	0.64	0.80	0.96	1.12	1.28	1.44
1750	0.00	0.17	0.33	0.50	0.66	0.82	0.99	1.15	1.32	1.48
1800	0.00	0.17	0.34	0.51	0.68	0.85	1.02	1.19	1.36	1.53
1850	0.00	0.17	0.35	0.52	0.70	0.87	1.05	1.22	1.40	1.57
1900	0.00	0.18	0.36	0.54	0.72	0.90	1.08	1.25	1.43	1.61
1950	0.00	0.18	0.37	0.55	0.73	0.92	1.10	1.29	1.47	1.65
2000	0.00	0.19	0.38	0.57	0.75	0.94	1.13	1.32	1.51	1.70
2100	0.00	0.20	0.40	0.59	0.79	0.99	1.19	1.38	1.58	1.78
2200	0.00	0.21	0.42	0.62	0.83	1.04	1.24	1.45	1.66	1.87
2300	0.00	0.22	0.43	0.65	0.87	1.08	1.30	1.52	1.73	1.95
2400	0.00	0.23	0.45	0.68	0.90	1.13	1.36	1.58	1.81	2.04
2500	0.00	0.24	0.47	0.71	0.94	1.18	1.41	1.65	1.89	2.12
2600	0.00	0.25	0.49	0.74	0.98	1.23	1.47	1.71	1.96	2.20
2700	0.00	0.25	0.51	0.76	1.02	1.27	1.53	1.78	2.04	2.29
2800	0.00	0.26	0.53	0.79	1.06	1.32	1.58	1.85	2.11	2.37
2900	0.00	0.27	0.55	0.82	1.09	1.37	1.64	1.91	2.19	2.46
3000	0.00	0.28	0.57	0.85	1.13	1.41	1.70	1.98	2.26	2.54

D - d A	Arc of contact on small pulley (degrees)	Factor G
0.00	180	1.00
0.10	174	0.99
0.20	169	0.97
0.30	163	0.96
0.40	157	0.94
0.50	151	0.93
0.60	145	0.91
0.70	139	0.89
0.80	133	0.87
0.90	127	0.85
1.00	120	0.82
1.10	113	0.80
1.20	106	0.77
1.30	99	0.73
1.40	91	0.70
1.50	83	0.65

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L	Belt ref.	ISO datum length mm	Corr. factor C _L
C-42	1145	0.74	C-108	2815	0.94
C-43	1165	0.74	C-110	2865	0.95
C-46	1245	0.76	C-112	2920	0.95
C-48	1290	0.77	C-115	2995	0.96
C-49	1320	0.77	C-116	3020	0.96
C-51	1370	0.78	C-118	3070	0.96
C-53	1420	0.79	C-120	3120	0.96
C-54	1445	0.79	C-124	3225	0.97
C-55	1470	0.79	C-128	3325	0.98
C-59	1570	0.81	C-132	3425	0.99
C-60	1595	0.81	C-134	3475	0.99
C-62	1650	0.82	C-136	3525	0.99
C-65	1725	0.83	C-140	3630	1.00
C-66	1750	0.83	C-144	3730	1.01
C-68	1800	0.84	C-147	3805	1.01
C-70	1850	0.85	C-153	3960	1.02
C-71	1875	0.85	C-158	4085	1.03
C-72	1900	0.85	C-162	4190	1.03
C-74	1950	0.86	C-165	4265	1.04
C-75	1980	0.86	C-173	4465	1.05
C-78	2055	0.87	C-177	4570	1.05
C-81	2130	0.88	C-180	4645	1.05
C-82	2155	0.88	C-195	5025	1.07
C-83	2180	0.88	C-208	5355	1.09
C-85	2230	0.89	C-210	5405	1.09
C-88	2310	0.90	C-222	5660	1.10
C-90	2360	0.90	C-225	5735	1.10
C-92	2410	0.91	C-238	6065	1.11
C-93	2435	0.91	C-240	6120	1.12
C-95	2485	0.91	C-250	6370	1.13
C-96	2510	0.92	C-255	6500	1.13
C-97	2535	0.92	C-265	6755	1.14
C-98	2560	0.92	C-270	6880	1.14
C-99	2590	0.92	C-280	7135	1.15
C-100	2610	0.92	C-285	7260	1.16
C-102	2665	0.93	C-300	7640	1.17
C-104	2715	0.93	C-330	8405	1.19
C-105	2740	0.94			

Number of belts required =

$$\frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$

POWER RATINGS HI-POWER®

Basic kW per belt

D

RPM of faster shaft	300	315	335	355	375	400	425	450	475	500	530	560	600	630	670	710	750
585	12.3	13.6	15.3	17.0	18.7	20.8	22.8	24.8	26.8	28.7	30.9	33.1	36.0	38.1	40.7	43.3	45.7
700	13.9	15.4	17.4	19.3	21.2	23.6	25.9	28.1	30.3	32.4	34.9	37.3	40.3	42.5	45.2	47.7	50.1
725	14.2	15.8	17.8	19.8	21.8	24.2	26.5	28.8	31.0	33.2	35.7	38.1	41.1	43.3	46.0	48.5	50.8
870	15.9	17.7	20.0	22.2	24.4	27.1	29.6	32.1	34.5	36.7	39.3	41.7	44.7	46.7	49.1	51.2	52.9
950	16.7	18.6	21.0	23.4	25.7	28.4	31.1	33.6	36.0	38.2	40.8	43.1	45.9	47.7	49.8	51.4	52.6
1160	18.4	20.4	23.1	25.6	28.0	30.9	33.5	36.0	38.2	40.2	42.4	44.1	45.9	46.7			
1450	19.3	21.5	24.2	26.7	29.0	31.5	33.7	35.5	36.9	37.9							
1750	18.5	20.5	22.9	25.0	26.7	28.3	29.2										
2850																	
3450																	
50	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.1	3.3	3.6	3.8	4.1	4.5	4.8	5.1	5.5	5.8
100	3.0	3.2	3.6	4.0	4.3	4.8	5.2	5.7	6.1	6.6	7.1	7.6	8.3	8.8	9.5	10.2	10.9
150	4.2	4.6	5.1	5.6	6.2	6.8	7.4	8.1	8.7	9.4	10.1	10.9	11.9	12.6	13.6	14.6	15.5
200	5.3	5.8	6.5	7.2	7.9	8.7	9.5	10.4	11.2	12.0	13.0	13.9	15.2	16.2	17.4	18.7	19.9
250	6.4	7.0	7.8	8.7	9.5	10.5	11.5	12.5	13.5	14.5	15.7	16.9	18.4	19.6	21.1	22.6	24.1
300	7.4	8.1	9.1	10.1	11.0	12.2	13.4	14.6	15.8	16.9	18.3	19.7	21.5	22.8	24.6	26.3	28.0
350	8.3	9.2	10.3	11.4	12.5	13.9	15.2	16.6	17.9	19.2	20.8	22.4	24.4	25.9	27.9	29.8	31.8
400	9.2	10.2	11.4	12.7	13.9	15.5	17.0	18.5	20.0	21.4	23.2	24.9	27.2	28.8	31.0	33.1	35.2
450	10.1	11.1	12.5	13.9	15.3	17.0	18.7	20.3	21.9	23.5	25.4	27.3	29.8	31.6	33.9	36.2	38.4
500	10.9	12.1	13.6	15.1	16.6	18.4	20.3	22.0	23.8	25.5	27.6	29.6	32.2	34.1	36.6	39.0	41.4
550	11.7	13.0	14.6	16.2	17.8	19.8	21.8	23.7	25.6	27.4	29.6	31.7	34.5	36.5	39.1	41.6	44.0
600	12.5	13.8	15.6	17.3	19.0	21.1	23.2	25.3	27.3	29.2	31.5	33.7	36.6	38.7	41.4	43.9	46.4
650	13.2	14.6	16.5	18.3	20.2	22.4	24.6	26.7	28.8	30.9	33.3	35.6	38.5	40.7	43.4	46.0	48.4
700	13.9	15.4	17.4	19.3	21.2	23.6	25.9	28.1	30.3	32.4	34.9	37.3	40.3	42.5	45.2	47.7	50.1
750	14.5	16.1	18.2	20.2	22.3	24.7	27.1	29.4	31.7	33.8	36.4	38.8	41.8	44.0	46.7	49.1	51.4
800	15.1	16.8	19.0	21.1	23.2	25.7	28.2	30.6	32.9	35.1	37.7	40.1	43.2	45.3	47.9	50.3	52.3
850	15.7	17.4	19.7	21.9	24.1	26.7	29.3	31.7	34.1	36.3	38.9	41.3	44.3	46.4	48.9	51.0	52.8
900	16.2	18.0	20.4	22.7	24.9	27.6	30.2	32.7	35.1	37.3	39.9	42.3	45.2	47.2	49.5	51.4	53.0
950	16.7	18.6	21.0	23.4	25.7	28.4	31.1	33.6	36.0	38.2	40.8	43.1	45.9	47.7	49.8	51.4	52.6
1000	17.2	19.1	21.6	24.0	26.3	29.1	31.8	34.3	36.7	39.0	41.4	43.7	46.3	48.0	49.8	51.1	51.8
1050	17.6	19.6	22.1	24.6	27.0	29.8	32.5	35.0	37.4	39.5	41.9	44.1	46.5	47.9	49.4	50.3	
1100	18.0	20.0	22.6	25.1	27.5	30.3	33.0	35.5	37.8	40.0	42.2	44.2	46.4	47.6	48.6		
1150	18.3	20.4	23.0	25.5	27.9	30.8	33.5	35.9	38.2	40.2	42.4	44.1	46.0	46.9			
1200	18.6	20.7	23.4	25.9	28.3	31.2	33.8	36.2	38.4	40.3	42.3	43.8	45.3	45.9			
1250	18.8	20.9	23.6	26.2	28.6	31.5	34.0	36.4	38.4	40.2	42.0	43.3	44.3				
1300	19.0	21.2	23.9	26.4	28.9	31.6	34.1	36.4	38.3	39.9	41.4	42.5					
1350	19.2	21.3	24.0	26.6	29.0	31.7	34.1	36.2	38.0	39.4	40.7	41.4					
1400	19.3	21.4	24.2	26.7	29.0	31.7	34.0	36.0	37.6	38.8	39.7						
1450	19.3	21.5	24.2	26.7	29.0	31.5	33.7	35.5	36.9	37.9							
1500	19.3	21.5	24.2	26.6	28.8	31.3	33.3	34.9	36.1	36.8							
1550	19.3	21.4	24.1	26.5	28.6	30.9	32.8	34.2	35.1								
1600	19.2	21.3	23.9	26.2	28.3	30.4	32.1	33.3	33.9								
1650	19.0	21.1	23.6	25.9	27.9	29.8	31.3	32.2									
1700	18.8	20.8	23.3	25.5	27.3	29.1	30.3										
1750	18.5	20.5	22.9	25.0	26.7	28.3	29.2										
1800	18.2	20.2	22.5	24.4	25.9	27.3											
1850	17.8	19.7	21.9	23.7	25.1	26.2											
1900	17.4	19.2	21.3	22.9	24.1	24.9											
1950	16.8	18.6	20.5	22.0	23.0												
2000	16.3	17.9	19.7	21.0	21.8												

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

Additional kW per belt for belt life

25000 Hrs

0

12000 Hrs

$\frac{d \times \text{RPM}}{88652}$

6000 Hrs

$\frac{d \times \text{RPM}}{45600}$

POWER RATINGS HI-POWER®

Additional kW per belt for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.01	1.02 to 1.03	1.04 to 1.06	1.07 to 1.08	1.09 to 1.12	1.13 to 1.16	1.17 to 1.22	1.23 to 1.32	1.33 to 1.5	>1.5	D - d A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.17	0.33	0.50	0.67	0.84	1.00	1.17	1.34	1.50	0.00	180	1.00
700	0.00	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	0.10	174	0.99
725	0.00	0.21	0.41	0.62	0.83	1.03	1.24	1.45	1.66	1.86	0.20	169	0.97
870	0.00	0.25	0.50	0.75	0.99	1.24	1.49	1.74	1.99	2.23	0.30	163	0.96
950	0.00	0.27	0.54	0.81	1.08	1.36	1.63	1.90	2.17	2.44	0.40	157	0.94
1160	0.00	0.33	0.66	1.00	1.32	1.66	1.99	2.32	2.65	2.98	0.50	151	0.93
1450	0.00	0.41	0.83	1.24	1.65	2.07	2.48	2.89	3.31	3.72	0.60	145	0.91
1750	0.00	0.50	1.00	1.50	2.00	2.50	3.00	3.49	4.00	4.49	0.70	139	0.89
2850	0.00	0.81	1.63	2.44	3.25	4.07	4.88	5.69	6.51	7.32	0.80	133	0.87
3450	0.00	0.99	1.97	2.96	3.94	4.92	5.91	6.89	7.88	8.86	0.90	127	0.85
50	0.00	0.01	0.03	0.04	0.06	0.07	0.09	0.10	0.11	0.13	1.00	120	0.82
100	0.00	0.03	0.06	0.09	0.11	0.14	0.17	0.20	0.23	0.26	1.10	113	0.80
150	0.00	0.04	0.09	0.13	0.17	0.21	0.26	0.30	0.34	0.39	1.20	106	0.77
200	0.00	0.06	0.11	0.17	0.23	0.29	0.34	0.40	0.46	0.51	1.30	99	0.73
250	0.00	0.07	0.14	0.21	0.29	0.36	0.43	0.50	0.57	0.64	1.40	91	0.70
300	0.00	0.09	0.17	0.26	0.34	0.43	0.51	0.60	0.69	0.77	1.50	83	0.65
350	0.00	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90			
400	0.00	0.11	0.23	0.34	0.46	0.57	0.69	0.80	0.91	1.03			
450	0.00	0.13	0.26	0.39	0.51	0.64	0.77	0.90	1.03	1.16			
500	0.00	0.14	0.29	0.43	0.57	0.71	0.86	1.00	1.14	1.28			
550	0.00	0.16	0.31	0.47	0.63	0.79	0.94	1.10	1.26	1.41			
600	0.00	0.17	0.34	0.51	0.68	0.86	1.03	1.20	1.37	1.54			
650	0.00	0.19	0.37	0.56	0.74	0.93	1.11	1.30	1.48	1.67			
700	0.00	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80			
750	0.00	0.21	0.43	0.64	0.86	1.07	1.29	1.50	1.71	1.93			
800	0.00	0.23	0.46	0.69	0.91	1.14	1.37	1.60	1.83	2.05			
850	0.00	0.24	0.49	0.73	0.97	1.21	1.46	1.70	1.94	2.18			
900	0.00	0.26	0.51	0.77	1.03	1.28	1.54	1.80	2.06	2.31			
950	0.00	0.27	0.54	0.81	1.08	1.36	1.63	1.90	2.17	2.44			
1000	0.00	0.29	0.57	0.86	1.14	1.43	1.71	2.00	2.28	2.57			
1050	0.00	0.30	0.60	0.90	1.20	1.50	1.80	2.10	2.40	2.70			
1100	0.00	0.31	0.63	0.94	1.26	1.57	1.88	2.20	2.51	2.82			
1150	0.00	0.33	0.66	0.99	1.31	1.64	1.97	2.30	2.63	2.95			
1200	0.00	0.34	0.69	1.03	1.37	1.71	2.06	2.40	2.74	3.08			
1250	0.00	0.36	0.71	1.07	1.43	1.78	2.14	2.50	2.85	3.21			
1300	0.00	0.37	0.74	1.12	1.48	1.86	2.23	2.60	2.97	3.34			
1350	0.00	0.39	0.77	1.16	1.54	1.93	2.31	2.69	3.08	3.47			
1400	0.00	0.40	0.80	1.20	1.60	2.00	2.40	2.79	3.20	3.60			
1450	0.00	0.41	0.83	1.24	1.65	2.07	2.48	2.89	3.31	3.72			
1500	0.00	0.43	0.86	1.29	1.71	2.14	2.57	2.99	3.43	3.85			
1550	0.00	0.44	0.89	1.33	1.77	2.21	2.66	3.09	3.54	3.98			
1600	0.00	0.46	0.91	1.37	1.83	2.28	2.74	3.19	3.65	4.11			
1650	0.00	0.47	0.94	1.42	1.88	2.36	2.83	3.29	3.77	4.24			
1700	0.00	0.49	0.97	1.46	1.94	2.43	2.91	3.39	3.88	4.37			
1750	0.00	0.50	1.00	1.50	2.00	2.50	3.00	3.49	4.00	4.49			
1800	0.00	0.51	1.03	1.54	2.05	2.57	3.08	3.59	4.11	4.62			
1850	0.00	0.53	1.06	1.59	2.11	2.64	3.17	3.69	4.23	4.75			
1900	0.00	0.54	1.09	1.63	2.17	2.71	3.26	3.79	4.34	4.88			
1950	0.00	0.56	1.11	1.67	2.23	2.78	3.34	3.89	4.45	5.01			
2000	0.00	0.57	1.14	1.72	2.28	2.85	3.43	3.99	4.57	5.14			

Belt length correction factor C_L

Belt ref.	ISO datum length mm	Corr. factor C _L
D-98	2570	0.83
D-104	2720	0.84
D-110	2875	0.85
D-120	3130	0.87
D-124	3230	0.88
D-128	3330	0.88
D-137	3560	0.90
D-140	3635	0.90
D-144	3740	0.91
D-158	4095	0.92
D-162	4195	0.93
D-170	4400	0.94
D-173	4475	0.94
D-177	4575	0.95
D-180	4650	0.95
D-187	4830	0.96
D-195	5035	0.97
D-197	5085	0.97
D-204	5260	0.97
D-210	5415	0.98
D-223	5680	0.99
D-240	6115	1.01
D-250	6365	1.01
D-270	6875	1.03
D-282	7180	1.04
D-298	7585	1.05
D-300	7635	1.05
D-330	8400	1.07
D-360	9160	1.09

$$\text{Number of belts required} = \frac{\text{Design kW}}{(A + B + C) \times G \times C_L}$$



POWER RATINGS MICRO-V®

Basic Watt per rib

PJ

RPM of faster shaft	20	24	26	28	30	32	34	36	38	40	42	45	48	50	53	56	63
585	11	20	25	29	34	39	43	48	52	57	61	68	75	79	86	92	107
700	12	23	29	34	39	45	50	56	61	66	72	79	87	92	100	108	126
725	12	24	29	35	41	46	52	57	63	68	74	82	90	95	103	111	130
870	13	27	34	40	47	54	60	67	73	80	86	96	105	112	121	130	152
950	14	29	36	43	51	58	65	72	79	86	93	103	114	120	131	141	164
1160	15	33	42	51	59	68	76	85	93	102	110	122	135	143	155	167	195
1450	17	39	49	60	71	81	91	102	112	122	133	148	163	173	188	202	237
1750	18	44	57	69	82	94	106	119	131	143	155	173	191	203	220	238	278
2850	20	60	79	99	118	137	156	175	194	212	231	259	286	304	331	357	419
3450	19	67	90	113	136	158	181	203	225	247	269	301	334	355	386	417	489
100	3	5	6	7	8	9	9	10	11	12	13	14	16	17	18	19	22
200	5	9	10	12	14	16	17	19	21	22	24	27	29	31	33	36	41
300	7	12	15	17	20	22	25	27	30	32	34	38	42	44	48	51	60
400	8	15	18	22	25	28	31	35	38	41	44	49	54	57	61	66	77
500	10	18	22	26	30	34	38	42	46	50	54	59	65	69	75	80	94
600	11	20	25	30	35	40	44	49	53	58	63	70	76	81	88	94	110
700	12	23	29	34	39	45	50	56	61	66	72	79	87	92	100	108	126
800	13	25	32	38	44	50	56	62	68	74	80	89	98	104	113	121	141
900	14	28	35	42	48	55	62	69	75	82	89	99	108	115	125	134	157
1000	14	30	37	45	53	60	68	75	82	90	97	108	119	126	136	147	172
1100	15	32	40	49	57	65	73	81	89	97	105	117	129	137	148	160	186
1200	16	34	43	52	61	70	78	87	96	104	113	126	139	147	160	172	201
1300	16	36	46	55	65	74	84	93	102	112	121	135	148	157	171	184	215
1400	17	38	48	58	69	79	89	99	109	119	129	143	158	168	182	196	230
1500	17	40	51	62	72	83	94	105	115	126	136	152	168	178	193	208	244
1600	18	41	53	65	76	88	99	110	122	133	144	160	177	188	204	220	258
1700	18	43	55	68	80	92	104	116	128	140	151	169	186	198	215	232	271
1800	18	45	58	71	84	96	109	121	134	146	159	177	195	207	225	243	285
1900	19	46	60	74	87	100	114	127	140	153	166	185	204	217	236	255	298
2000	19	48	62	76	91	105	118	132	146	160	173	193	213	227	246	266	311
2200	19	51	67	82	97	113	128	143	158	172	187	209	231	245	267	288	337
2400	20	54	71	87	104	120	137	153	169	185	201	225	248	264	287	310	363
2600	20	57	75	93	110	128	146	163	180	197	214	240	265	282	307	331	388
2800	20	59	78	98	117	135	154	173	191	210	228	255	282	299	326	352	413
3000	20	62	82	102	123	143	163	182	202	221	241	269	298	317	345	373	437
3200	20	64	86	107	129	150	171	192	212	233	253	284	314	334	363	393	460
3400	19	66	89	112	134	157	179	201	223	244	266	298	330	351	382	413	483
3600	19	68	92	116	140	163	187	210	233	256	278	312	345	367	400	432	506
3800	19	70	95	121	145	170	194	219	243	267	290	325	360	383	417	451	528
4000	18	72	98	125	151	176	202	227	252	277	302	339	375	399	435	470	550
4200	18	74	101	129	156	183	209	236	262	288	314	352	390	414	451	488	571
4400	17	75	104	133	161	189	217	244	271	298	325	365	404	430	468	506	592
4600	17	77	107	137	166	195	224	252	280	308	336	377	418	445	484	524	613
4800	17	79	110	140	171	201	231	260	289	318	347	390	432	459	500	541	633
5000	17	80	112	144	175	207	238	268	298	328	358	402	445	474	516	558	652
5200	17	81	115	148	180	212	244	276	307	338	369	414	458	488	531	574	671
5400	17	83	117	151	185	218	251	283	315	347	379	426	471	502	546	590	690
5600	17	84	119	154	189	223	257	291	324	357	389	437	484	515	561	606	708
5800	17	85	121	158	193	229	263	298	332	366	399	448	497	529	575	622	726
6000	17	86	124	161	197	234	270	305	340	375	409	459	509	541	590	637	743
6200	17	87	126	164	201	239	276	312	348	383	418	470	521	554	603	651	759
6400	17	88	128	167	205	244	281	319	355	392	428	481	533	567	617	666	776
6600	17	89	129	170	209	248	287	325	363	400	437	491	544	579	630	680	791
6800	17	89	131	172	213	253	293	332	370	408	446	501	555	590	642	693	806
7000	17	90	133	175	217	258	298	338	377	416	455	511	566	602	655	706	821
7500	17	91	137	181	225	269	311	353	395	435	476	535	592	629	684	737	855
8000	17	92	140	187	233	279	324	368	411	453	495	557	616	655	711	766	886
8500	17	93	143	192	241	288	335	381	426	470	514	577	639	678	736	792	913
9000	17	93	145	197	247	297	346	393	440	486	531	596	659	700	759	815	937
10000	17	92	149	204	259	312	364	415	465	514	561	629	695	736	797	853	972



POWER RATINGS MICRO-V®

Additional Watt per rib for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.02	1.03 to 1.06	1.07 to 1.10	1.11 to 1.16	1.17 to 1.23	1.24 to 1.33	1.34 to 1.47	1.48 to 1.71	1.72 to 2.31	>2.32	D - d A	Arc of contact on small pulley (degrees)	Factor G
85	0	1	1	2	3	3	4	5	6	6	0.00	180	1.00
700	0	1	2	2	3	4	5	6	7	7	0.10	174	0.99
725	0	1	2	3	3	4	5	6	7	8	0.20	169	0.97
870	0	1	2	3	4	5	6	7	8	9	0.30	163	0.96
950	0	1	2	3	5	6	7	8	9	10	0.40	157	0.94
1160	0	1	3	4	5	7	8	10	11	12	0.50	151	0.93
1450	0	2	3	5	7	9	10	12	14	15	0.60	145	0.91
1750	0	2	4	6	8	10	12	15	17	19	0.70	139	0.89
2850	0	3	7	10	14	17	20	24	27	30	0.80	133	0.87
3450	0	4	8	12	16	20	25	29	33	37	0.90	127	0.85
100	0	0	0	0	0	1	1	1	1	1	1.00	120	0.82
200	0	0	0	1	1	1	1	2	2	2	1.10	113	0.80
300	0	0	1	1	1	2	2	2	3	3	1.20	106	0.77
400	0	0	1	1	2	2	3	3	4	4	1.30	99	0.73
500	0	1	1	2	2	3	4	4	5	5	1.40	91	0.70
600	0	1	1	2	3	4	4	5	6	6	1.50	83	0.65
700	0	1	2	2	3	4	5	6	7	7			
800	0	1	2	3	4	5	6	7	8	9			
900	0	1	2	3	4	5	6	7	9	10			
1000	0	1	2	4	5	6	7	8	9	11			
1100	0	1	3	4	5	7	8	9	10	12			
1200	0	1	3	4	6	7	9	10	11	13			
1300	0	2	3	5	6	8	9	11	12	14			
1400	0	2	3	5	7	8	10	12	13	15			
1500	0	2	4	5	7	9	11	12	14	16	PJ	457 0.76	
1600	0	2	4	6	8	9	11	13	15	17	PJ	483 0.78	
1700	0	2	4	6	8	10	12	14	16	18	PJ	508 0.79	
1800	0	2	4	6	9	11	13	15	17	19	PJ	559 0.82	
1900	0	2	5	7	9	11	14	16	18	20	PJ	584 0.83	
2000	0	2	5	7	9	12	14	17	19	21	PJ	610 0.85	
2200	0	3	5	8	10	13	16	18	21	23	PJ	660 0.87	
2400	0	3	6	9	11	14	17	20	23	26	PJ	711 0.89	
2600	0	3	6	9	12	15	18	22	25	28	PJ	762 0.91	
2800	0	3	7	10	13	17	20	23	27	30	PJ	813 0.93	
3000	0	4	7	11	14	18	21	25	28	32	PJ	838 0.94	
3200	0	4	8	11	15	19	23	27	30	34	PJ	864 0.95	
3400	0	4	8	12	16	20	24	28	32	36	PJ	914 0.97	
3600	0	4	9	13	17	21	26	30	34	38	PJ	965 0.98	
3800	0	5	9	14	18	23	27	32	36	41	PJ	1016 1.00	
4000	0	5	9	14	19	24	28	33	38	43	PJ	1041 1.00	
4200	0	5	10	15	20	25	30	35	40	45	PJ	1067 1.01	
4400	0	5	10	16	21	26	31	36	42	47	PJ	1092 1.02	
4600	0	5	11	16	22	27	33	38	44	49	PJ	1118 1.03	
4800	0	6	11	17	23	28	34	40	45	51	PJ	1168 1.04	
5000	0	6	12	18	24	30	36	41	47	53	PJ	1219 1.05	
5200	0	6	12	18	25	31	37	43	49	55	PJ	1244 1.06	
5400	0	6	13	19	26	32	38	45	51	58	PJ	1270 1.07	
5600	0	7	13	20	27	33	40	46	53	60	PJ	1321 1.08	
5800	0	7	14	21	27	34	41	48	55	62	PJ	1397 1.10	
6000	0	7	14	21	28	36	43	50	57	64	PJ	1473 1.11	
6200	0	7	15	22	29	37	44	51	59	66	PJ	1549 1.13	
6400	0	8	15	23	30	38	46	53	61	68	PJ	1651 1.15	
6600	0	8	16	23	31	39	47	55	63	70	PJ	1854 1.18	
6800	0	8	16	24	32	40	48	56	64	73	PJ	2210 1.23	
7000	0	8	17	25	33	41	50	58	66	75	PJ	2337 1.25	
7500	0	9	18	27	36	44	53	62	71	80	PJ	2489 1.27	
8000	0	10	19	28	38	47	57	66	76	85			
8500	0	10	20	30	40	50	60	71	81	91			
9000	0	11	21	32	43	53	64	75	85	96			
10000	0	12	24	36	47	59	71	83	95	107			

Belt length correction factor C_L

Belt ref.	Corr. factor C _L	Belt ref.	Corr. factor C _L
PJ	457 0.76		
PJ	483 0.78		
PJ	508 0.79		
PJ	559 0.82		
PJ	584 0.83		
PJ	610 0.85		
PJ	660 0.87		
PJ	711 0.89		
PJ	762 0.91		
PJ	813 0.93		
PJ	838 0.94		
PJ	864 0.95		
PJ	914 0.97		
PJ	965 0.98		
PJ	1016 1.00		
PJ	1041 1.00		
PJ	1067 1.01		
PJ	1092 1.02		
PJ	1118 1.03		
PJ	1168 1.04		
PJ	1219 1.05		
PJ	1244 1.06		
PJ	1270 1.07		
PJ	1321 1.08		
PJ	1397 1.10		
PJ	1473 1.11		
PJ	1549 1.13		
PJ	1651 1.15		
PJ	1854 1.18		
PJ	2210 1.23		
PJ	2337 1.25		
PJ	2489 1.27		

$$\text{Number of ribs required} = \frac{\text{Design kW} \times 1000}{(A + B) \times G \times C_L}$$



POWER RATINGS MICRO-V®

Basic kW per rib

PL

RPM of faster shaft	75	80	90	100	112	125	140	160	180	200	224	250	280	315	355	400	450
585	0.35	0.40	0.50	0.60	0.71	0.84	0.98	1.17	1.36	1.54	1.76	1.99	2.25	2.55	2.89	3.26	3.66
700	0.40	0.46	0.57	0.69	0.83	0.98	1.14	1.36	1.58	1.80	2.05	2.32	2.62	2.97	3.36	3.79	4.25
725	0.41	0.47	0.59	0.71	0.85	1.01	1.18	1.41	1.63	1.85	2.11	2.39	2.70	3.06	3.46	3.90	4.37
870	0.47	0.54	0.68	0.83	0.99	1.17	1.37	1.64	1.90	2.16	2.47	2.79	3.15	3.57	4.03	4.53	5.06
950	0.50	0.58	0.73	0.89	1.07	1.26	1.48	1.77	2.05	2.33	2.65	3.00	3.39	3.84	4.33	4.86	5.42
1160	0.58	0.68	0.86	1.04	1.26	1.49	1.75	2.09	2.42	2.75	3.13	3.54	3.99	4.50	5.06	5.65	6.27
1450	0.68	0.80	1.02	1.24	1.50	1.78	2.10	2.50	2.90	3.29	3.75	4.22	4.75	5.33	5.95	6.60	7.23
1750	0.78	0.92	1.18	1.44	1.74	2.07	2.43	2.91	3.37	3.81	4.33	4.86	5.44	6.07	6.72	7.35	
2850	1.07	1.27	1.67	2.05	2.50	2.97	3.49	4.15	4.76	5.33	5.94	6.52					
3450	1.20	1.43	1.88	2.33	2.84	3.36	3.94	4.65	5.29	5.85							
100	0.08	0.09	0.11	0.13	0.16	0.18	0.21	0.25	0.29	0.32	0.37	0.42	0.47	0.53	0.61	0.69	0.77
200	0.15	0.16	0.20	0.24	0.29	0.33	0.39	0.46	0.53	0.60	0.68	0.77	0.88	0.99	1.13	1.27	1.44
300	0.20	0.23	0.29	0.34	0.40	0.47	0.55	0.66	0.76	0.86	0.98	1.11	1.26	1.42	1.61	1.82	2.06
400	0.26	0.29	0.36	0.43	0.52	0.61	0.71	0.84	0.98	1.11	1.26	1.43	1.62	1.83	2.08	2.35	2.64
500	0.31	0.35	0.44	0.52	0.62	0.73	0.86	1.02	1.18	1.34	1.53	1.73	1.96	2.23	2.52	2.85	3.20
600	0.35	0.40	0.51	0.61	0.73	0.86	1.00	1.20	1.39	1.57	1.79	2.03	2.30	2.61	2.95	3.33	3.74
700	0.40	0.46	0.57	0.69	0.83	0.98	1.14	1.36	1.58	1.80	2.05	2.32	2.62	2.97	3.36	3.79	4.25
800	0.44	0.51	0.64	0.77	0.93	1.09	1.28	1.53	1.77	2.01	2.30	2.60	2.94	3.33	3.76	4.23	4.74
900	0.48	0.56	0.70	0.85	1.02	1.20	1.41	1.69	1.96	2.22	2.54	2.87	3.24	3.67	4.14	4.65	5.20
1000	0.52	0.60	0.76	0.92	1.11	1.31	1.54	1.85	2.14	2.43	2.77	3.13	3.54	4.00	4.51	5.05	5.63
1100	0.56	0.65	0.82	1.00	1.20	1.42	1.67	2.00	2.32	2.63	3.00	3.39	3.82	4.32	4.86	5.44	6.04
1200	0.60	0.69	0.88	1.07	1.29	1.53	1.80	2.15	2.49	2.83	3.22	3.64	4.10	4.62	5.19	5.80	6.42
1300	0.63	0.74	0.94	1.14	1.38	1.63	1.92	2.29	2.66	3.02	3.44	3.88	4.37	4.91	5.51	6.13	6.77
1400	0.67	0.78	0.99	1.21	1.46	1.73	2.04	2.43	2.82	3.20	3.64	4.11	4.62	5.20	5.81	6.45	7.09
1500	0.70	0.82	1.05	1.28	1.54	1.83	2.15	2.57	2.98	3.38	3.85	4.33	4.87	5.46	6.09	6.74	7.37
1600	0.73	0.86	1.10	1.34	1.62	1.93	2.27	2.71	3.14	3.56	4.05	4.55	5.11	5.72	6.36	7.00	7.62
1700	0.77	0.90	1.15	1.41	1.70	2.02	2.38	2.84	3.29	3.73	4.24	4.76	5.33	5.95	6.60	7.24	
1800	0.80	0.93	1.20	1.47	1.78	2.11	2.49	2.97	3.44	3.90	4.42	4.96	5.55	6.18	6.83	7.46	
1900	0.83	0.97	1.25	1.53	1.86	2.20	2.59	3.10	3.59	4.06	4.60	5.15	5.75	6.39	7.03	7.64	
2000	0.86	1.01	1.30	1.59	1.93	2.29	2.70	3.22	3.73	4.22	4.77	5.34	5.94	6.58	7.22		
2100	0.88	1.04	1.35	1.65	2.00	2.38	2.80	3.34	3.87	4.37	4.94	5.51	6.13	6.76	7.38		
2200	0.91	1.07	1.39	1.71	2.08	2.46	2.90	3.46	4.00	4.51	5.09	5.68	6.29	6.92			
2300	0.94	1.11	1.44	1.76	2.14	2.55	3.00	3.58	4.13	4.65	5.24	5.84	6.45	7.07			
2400	0.97	1.14	1.48	1.82	2.21	2.63	3.09	3.69	4.25	4.79	5.39	5.98	6.59	7.19			
2500	0.99	1.17	1.53	1.87	2.28	2.71	3.19	3.80	4.37	4.92	5.53	6.12	6.72				
2600	1.02	1.20	1.57	1.93	2.34	2.78	3.28	3.90	4.49	5.04	5.65	6.25	6.84				
2700	1.04	1.23	1.61	1.98	2.41	2.86	3.36	4.00	4.60	5.16	5.78	6.37	6.94				
2800	1.06	1.26	1.65	2.03	2.47	2.93	3.45	4.10	4.71	5.27	5.89	6.47					
2900	1.08	1.29	1.69	2.08	2.53	3.01	3.53	4.19	4.81	5.38	5.99	6.57					
3000	1.11	1.32	1.73	2.13	2.59	3.08	3.61	4.29	4.91	5.48	6.09	6.65					
3100	1.13	1.34	1.76	2.17	2.65	3.14	3.69	4.37	5.00	5.57	6.18						
3200	1.15	1.37	1.80	2.22	2.70	3.21	3.76	4.46	5.09	5.66	6.26						
3300	1.17	1.39	1.83	2.26	2.76	3.27	3.84	4.54	5.17	5.74	6.33						
3400	1.19	1.42	1.87	2.30	2.81	3.33	3.91	4.61	5.25	5.82	6.39						
3500	1.20	1.44	1.90	2.35	2.86	3.39	3.97	4.69	5.33	5.89							
3600	1.22	1.46	1.93	2.39	2.91	3.45	4.04	4.75	5.39	5.95							
3700	1.24	1.49	1.96	2.43	2.96	3.51	4.10	4.82	5.46	6.00							
3800	1.26	1.51	1.99	2.46	3.01	3.56	4.16	4.88	5.51	6.05							
3900	1.27	1.53	2.02	2.50	3.05	3.61	4.21	4.94	5.56								
4000	1.29	1.55	2.05	2.54	3.09	3.66	4.27	4.99	5.61								
4200	1.31	1.58	2.10	2.60	3.17	3.75	4.36	5.08	5.68								
4400	1.34	1.62	2.15	2.67	3.25	3.83	4.45	5.16									
4600	1.36	1.65	2.20	2.72	3.32	3.91	4.52	5.22									
4800	1.38	1.67	2.24	2.78	3.38	3.97	4.58										
5000	1.40	1.70	2.28	2.82	3.43	4.02	4.63										
5200	1.41	1.72	2.31	2.86	3.47	4.07	4.66										
5400	1.42	1.74	2.34	2.90	3.51	4.10	4.68										
5600	1.43	1.75	2.36	2.92	3.54	4.12											
5800	1.44	1.76	2.38	2.95	3.56	4.14											
6000	1.44	1.77	2.39	2.96	3.57	4.14											

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

POWER RATINGS MICRO-V®

Additional kW per rib for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.02	1.03 to 1.06	1.07 to 1.10	1.11 to 1.16	1.17 to 1.23	1.24 to 1.33	1.34 to 1.47	1.48 to 1.71	1.72 to 2.31	>2.32	D - d / A	Arc of contact on small pulley (degrees)	Factor G
585	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.00	180	1.00
700	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	174	0.99
725	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.20	169	0.97
870	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.30	163	0.96
950	0.00	0.01	0.03	0.04	0.05	0.07	0.08	0.09	0.11	0.12	0.40	157	0.94
1160	0.00	0.02	0.03	0.05	0.07	0.08	0.10	0.11	0.13	0.15	0.50	151	0.93
1450	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.60	145	0.91
1750	0.00	0.02	0.05	0.07	0.10	0.12	0.15	0.17	0.20	0.22	0.70	139	0.89
2850	0.00	0.04	0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.36	0.80	133	0.87
3450	0.00	0.05	0.10	0.15	0.19	0.24	0.29	0.34	0.39	0.44	0.90	127	0.85
100	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	1.00	120	0.82
200	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	1.10	113	0.80
300	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	1.20	106	0.77
400	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.05	0.05	1.30	99	0.73
500	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.06	1.40	91	0.70
600	0.00	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.08	1.50	83	0.65
700	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09			
800	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.10			
900	0.00	0.01	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.11			
1000	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.10	0.11	0.13			
1100	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.12	0.14			
1200	0.00	0.02	0.03	0.05	0.07	0.08	0.10	0.12	0.14	0.15			
1300	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.15	0.16			
1400	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18			
1500	0.00	0.02	0.04	0.06	0.08	0.11	0.13	0.15	0.17	0.19			
1600	0.00	0.02	0.05	0.07	0.09	0.11	0.14	0.16	0.18	0.20			
1700	0.00	0.02	0.05	0.07	0.10	0.12	0.14	0.17	0.19	0.22			
1800	0.00	0.03	0.05	0.08	0.10	0.13	0.15	0.18	0.20	0.23			
1900	0.00	0.03	0.05	0.08	0.11	0.13	0.16	0.19	0.21	0.24			
2000	0.00	0.03	0.06	0.08	0.11	0.14	0.17	0.20	0.23	0.25			
2100	0.00	0.03	0.06	0.09	0.12	0.15	0.18	0.21	0.24	0.27			
2200	0.00	0.03	0.06	0.09	0.12	0.15	0.19	0.22	0.25	0.28			
2300	0.00	0.03	0.06	0.10	0.13	0.16	0.19	0.23	0.26	0.29			
2400	0.00	0.03	0.07	0.10	0.14	0.17	0.20	0.24	0.27	0.30			
2500	0.00	0.04	0.07	0.11	0.14	0.18	0.21	0.25	0.28	0.32			
2600	0.00	0.04	0.07	0.11	0.15	0.18	0.22	0.26	0.29	0.33			
2700	0.00	0.04	0.08	0.11	0.15	0.19	0.23	0.27	0.30	0.34			
2800	0.00	0.04	0.08	0.12	0.16	0.20	0.24	0.28	0.32	0.35			
2900	0.00	0.04	0.08	0.12	0.16	0.20	0.24	0.29	0.33	0.37			
3000	0.00	0.04	0.08	0.13	0.17	0.21	0.25	0.30	0.34	0.38			
3100	0.00	0.04	0.09	0.13	0.17	0.22	0.26	0.31	0.35	0.39			
3200	0.00	0.05	0.09	0.14	0.18	0.23	0.27	0.32	0.36	0.41			
3300	0.00	0.05	0.09	0.14	0.19	0.23	0.28	0.32	0.37	0.42			
3400	0.00	0.05	0.10	0.14	0.19	0.24	0.29	0.33	0.38	0.43			
3500	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.34	0.39	0.44			
3600	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.41	0.46			
3700	0.00	0.05	0.10	0.16	0.21	0.26	0.31	0.36	0.42	0.47			
3800	0.00	0.05	0.11	0.16	0.21	0.27	0.32	0.37	0.43	0.48			
3900	0.00	0.06	0.11	0.16	0.22	0.27	0.33	0.38	0.44	0.49			
4000	0.00	0.06	0.11	0.17	0.23	0.28	0.34	0.39	0.45	0.51			
4200	0.00	0.06	0.12	0.18	0.24	0.30	0.35	0.41	0.47	0.53			
4400	0.00	0.06	0.12	0.19	0.25	0.31	0.37	0.43	0.50	0.56			
4600	0.00	0.06	0.13	0.19	0.26	0.32	0.39	0.45	0.52	0.58			
4800	0.00	0.07	0.14	0.20	0.27	0.34	0.41	0.47	0.54	0.61			
5000	0.00	0.07	0.14	0.21	0.28	0.35	0.42	0.49	0.56	0.63			
5200	0.00	0.07	0.15	0.22	0.29	0.37	0.44	0.51	0.59	0.66			
5400	0.00	0.08	0.15	0.23	0.30	0.38	0.46	0.53	0.61	0.68			
5600	0.00	0.08	0.16	0.24	0.32	0.39	0.47	0.55	0.63	0.71			
5800	0.00	0.08	0.16	0.24	0.33	0.41	0.49	0.57	0.65	0.73			
6000	0.00	0.08	0.17	0.25	0.34	0.42	0.51	0.59	0.68	0.76			

Belt length correction factor C_L

Belt ref.	Corr. factor C _L	Belt ref.	Corr. factor C _L
PL	1270 0.87		
PL	1371 0.89		
PL	1422 0.90		
PL	1562 0.92		
PL	1613 0.93		
PL	1664 0.94		
PL	1715 0.95		
PL	1764 0.95		
PL	1841 0.96		
PL	1943 0.98		
PL	1981 0.98		
PL	2020 0.99		
PL	2070 0.99		
PL	2134 1.00		
PL	2197 1.01		
PL	2324 1.02		
PL	2476 1.04		
PL	2515 1.04		
PL	2705 1.06		
PL	2845 1.07		
PL	2921 1.08		
PL	3086 1.09		
PL	3125 1.09		
PL	3289 1.11		
PL	3327 1.11		
PL	3696 1.13		

$$\text{Number of ribs required} = \frac{\text{Design kW}}{(A + B) \times G \times C_L}$$



POWER RATINGS MICRO-V®

Basic kW per rib

PM

RPM of faster shaft	180	190	200	212	224	236	250	280	315	355	400	450	500	560	630	710	800
585	2.96	3.26	3.56	3.92	4.27	4.62	5.02	5.88	6.86	7.95	9.15	10.44	11.70	13.16	14.78	16.54	18.39
700	3.40	3.75	4.10	4.51	4.92	5.33	5.80	6.79	7.92	9.18	10.55	12.02	13.44	15.06	16.85	18.73	20.65
725	3.49	3.85	4.21	4.64	5.06	5.48	5.96	6.98	8.14	9.44	10.84	12.35	13.80	15.45	17.26	19.16	21.08
870	4.00	4.42	4.84	5.34	5.83	6.31	6.87	8.05	9.38	10.86	12.45	14.13	15.72	17.50	19.39	21.29	23.06
950	4.27	4.72	5.17	5.70	6.23	6.75	7.35	8.61	10.03	11.59	13.27	15.02	16.67	18.48	20.37	22.19	23.77
1160	4.92	5.45	5.97	6.60	7.21	7.82	8.51	9.96	11.58	13.33	15.17	17.05	18.74	20.51	22.16		
1450	5.70	6.33	6.95	7.68	8.40	9.10	9.91	11.56	13.37	15.27	17.19	19.02	20.50				
1750	6.39	7.10	7.81	8.63	9.43	10.21	11.09	12.87	14.76	16.66	18.42						
2850	7.71	8.58	9.40	10.32	11.17	11.95	12.76										
3450	7.53	8.35	9.10	9.89													
100	0.70	0.76	0.82	0.90	0.97	1.05	1.13	1.31	1.52	1.76	2.02	2.31	2.59	2.93	3.31	3.75	4.24
200	1.25	1.37	1.48	1.62	1.76	1.89	2.05	2.39	2.78	3.21	3.70	4.23	4.75	5.37	6.08	6.88	7.76
300	1.74	1.91	2.08	2.27	2.47	2.67	2.89	3.38	3.93	4.55	5.24	6.00	6.74	7.61	8.61	9.72	10.95
400	2.20	2.41	2.63	2.88	3.14	3.39	3.68	4.30	5.01	5.81	6.69	7.65	8.59	9.69	10.94	12.33	13.84
500	2.62	2.88	3.14	3.45	3.76	4.07	4.42	5.17	6.03	6.99	8.05	9.20	10.32	11.62	13.10	14.71	16.43
600	3.02	3.33	3.63	4.00	4.36	4.71	5.13	6.00	7.00	8.11	9.34	10.66	11.94	13.42	15.07	16.85	18.71
700	3.40	3.75	4.10	4.51	4.92	5.33	5.80	6.79	7.92	9.18	10.55	12.02	13.44	15.06	16.85	18.73	20.65
800	3.76	4.15	4.54	5.00	5.46	5.92	6.44	7.54	8.80	10.19	11.69	13.30	14.82	16.55	18.42	20.34	22.21
900	4.10	4.53	4.96	5.47	5.98	6.48	7.05	8.26	9.63	11.14	12.76	14.47	16.09	17.88	19.78	21.65	23.36
1000	4.43	4.90	5.37	5.92	6.47	7.01	7.64	8.94	10.41	12.03	13.75	15.55	17.22	19.04	20.90	22.64	
1100	4.74	5.25	5.75	6.35	6.94	7.52	8.19	9.59	11.15	12.86	14.66	16.52	18.22	20.01	21.77		
1200	5.03	5.58	6.12	6.76	7.39	8.01	8.72	10.20	11.85	13.63	15.49	17.38	19.07	20.79	22.37		
1300	5.31	5.89	6.47	7.14	7.81	8.46	9.21	10.77	12.49	14.34	16.24	18.13	19.76	21.36			
1400	5.58	6.19	6.80	7.51	8.21	8.90	9.68	11.31	13.09	14.98	16.89	18.75	20.30				
1500	5.83	6.47	7.11	7.85	8.59	9.31	10.12	11.80	13.64	15.55	17.46	19.25	20.66				
1600	6.06	6.74	7.40	8.18	8.94	9.69	10.53	12.26	14.13	16.05	17.92	19.61					
1700	6.28	6.99	7.68	8.48	9.27	10.04	10.91	12.68	14.57	16.47	18.28						
1800	6.49	7.22	7.93	8.77	9.58	10.37	11.26	13.05	14.95	16.82	18.53						
1900	6.68	7.43	8.17	9.03	9.86	10.67	11.57	13.39	15.27	17.09	18.68						
2000	6.86	7.63	8.39	9.27	10.12	10.94	11.85	13.68	15.53	17.27							
2100	7.02	7.81	8.58	9.48	10.35	11.18	12.10	13.92	15.73	17.37							
2200	7.16	7.98	8.76	9.67	10.55	11.39	12.31	14.11	15.87								
2300	7.29	8.12	8.92	9.84	10.73	11.56	12.49	14.26	15.93								
2400	7.41	8.25	9.06	9.99	10.87	11.71	12.63	14.35	15.93								
2500	7.50	8.35	9.17	10.11	10.99	11.83	12.73	14.40									
2600	7.58	8.44	9.26	10.20	11.08	11.91	12.79	14.39									
2700	7.64	8.51	9.34	10.27	11.14	11.95	12.81	14.32									
2800	7.69	8.56	9.38	10.31	11.17	11.96	12.79										
2900	7.72	8.59	9.41	10.33	11.17	11.93	12.72										
3000	7.73	8.59	9.41	10.31	11.13	11.87	12.61										
3100	7.72	8.58	9.38	10.27	11.07	11.77											
3200	7.69	8.54	9.33	10.20	10.96	11.62											
3300	7.64	8.48	9.26	10.10	10.83												
3400	7.57	8.40	9.16	9.96	10.65												
3500	7.48	8.30	9.03	9.80													
3600	7.38	8.17	8.88	9.60													
3700	7.25	8.02	8.69														
3800	7.10	7.84	8.48														
3900	6.92	7.64															
4000	6.73	7.41															

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

POWER RATINGS MICRO-V®

Additional kW per rib for speed ratio

Arc of contact correction factor G

RPM of faster shaft	1 to 1.02	1.03 to 1.06	1.07 to 1.10	1.11 to 1.16	1.17 to 1.23	1.24 to 1.33	1.34 to 1.47	1.48 to 1.71	1.72 to 2.31	>2.32
585	0.00	0.05	0.11	0.16	0.21	0.26	0.32	0.37	0.42	0.47
700	0.00	0.06	0.13	0.19	0.25	0.31	0.38	0.44	0.50	0.57
725	0.00	0.07	0.13	0.20	0.26	0.33	0.39	0.46	0.52	0.59
870	0.00	0.08	0.16	0.23	0.31	0.39	0.47	0.55	0.63	0.70
950	0.00	0.09	0.17	0.26	0.34	0.43	0.51	0.60	0.68	0.77
1160	0.00	0.10	0.21	0.31	0.42	0.52	0.63	0.73	0.83	0.94
1450	0.00	0.13	0.26	0.39	0.52	0.65	0.78	0.91	1.04	1.17
1750	0.00	0.16	0.31	0.47	0.63	0.79	0.94	1.10	1.26	1.42
2850	0.00	0.26	0.51	0.77	1.03	1.28	1.54	1.80	2.05	2.31
3450	0.00	0.31	0.62	0.93	1.24	1.55	1.86	2.17	2.48	2.79
100	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.07	0.08
200	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.14	0.16
300	0.00	0.03	0.05	0.08	0.11	0.13	0.16	0.19	0.22	0.24
400	0.00	0.04	0.07	0.11	0.14	0.18	0.22	0.25	0.29	0.32
500	0.00	0.05	0.09	0.14	0.18	0.22	0.27	0.31	0.36	0.40
600	0.00	0.05	0.11	0.16	0.22	0.27	0.32	0.38	0.43	0.49
700	0.00	0.06	0.13	0.19	0.25	0.31	0.38	0.44	0.50	0.57
800	0.00	0.07	0.14	0.22	0.29	0.36	0.43	0.50	0.58	0.65
900	0.00	0.08	0.16	0.24	0.32	0.40	0.49	0.57	0.65	0.73
1000	0.00	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.72	0.81
1100	0.00	0.10	0.20	0.30	0.40	0.49	0.59	0.69	0.79	0.89
1200	0.00	0.11	0.22	0.32	0.43	0.54	0.65	0.76	0.86	0.97
1300	0.00	0.12	0.23	0.35	0.47	0.58	0.70	0.82	0.94	1.05
1400	0.00	0.13	0.25	0.38	0.50	0.63	0.76	0.88	1.01	1.13
1500	0.00	0.14	0.27	0.41	0.54	0.67	0.81	0.94	1.08	1.21
1600	0.00	0.14	0.29	0.43	0.58	0.72	0.86	1.01	1.15	1.30
1700	0.00	0.15	0.31	0.46	0.61	0.76	0.92	1.07	1.22	1.38
1800	0.00	0.16	0.32	0.49	0.65	0.81	0.97	1.13	1.30	1.46
1900	0.00	0.17	0.34	0.51	0.68	0.85	1.03	1.20	1.37	1.54
2000	0.00	0.18	0.36	0.54	0.72	0.90	1.08	1.26	1.44	1.62
2100	0.00	0.19	0.38	0.57	0.76	0.94	1.13	1.32	1.51	1.70
2200	0.00	0.20	0.40	0.59	0.79	0.99	1.19	1.39	1.58	1.78
2300	0.00	0.21	0.41	0.62	0.83	1.03	1.24	1.45	1.66	1.86
2400	0.00	0.22	0.43	0.65	0.86	1.08	1.30	1.51	1.73	1.94
2500	0.00	0.23	0.45	0.68	0.90	1.12	1.35	1.57	1.80	2.02
2600	0.00	0.23	0.47	0.70	0.94	1.17	1.40	1.64	1.87	2.10
2700	0.00	0.24	0.49	0.73	0.97	1.21	1.46	1.70	1.94	2.19
2800	0.00	0.25	0.50	0.76	1.01	1.26	1.51	1.76	2.01	2.27
2900	0.00	0.26	0.52	0.78	1.04	1.30	1.57	1.83	2.09	2.35
3000	0.00	0.27	0.54	0.81	1.08	1.35	1.62	1.89	2.16	2.43
3100	0.00	0.28	0.56	0.84	1.12	1.39	1.67	1.95	2.23	2.51
3200	0.00	0.29	0.58	0.86	1.15	1.44	1.73	2.02	2.30	2.59
3300	0.00	0.30	0.59	0.89	1.19	1.48	1.78	2.08	2.37	2.67
3400	0.00	0.31	0.61	0.92	1.22	1.53	1.84	2.14	2.45	2.75
3500	0.00	0.32	0.63	0.95	1.26	1.57	1.89	2.20	2.52	2.83
3600	0.00	0.32	0.65	0.97	1.30	1.62	1.94	2.27	2.59	2.91
3700	0.00	0.33	0.67	1.00	1.33	1.66	2.00	2.33	2.66	3.00
3800	0.00	0.34	0.68	1.03	1.37	1.71	2.05	2.39	2.73	3.08
3900	0.00	0.35	0.70	1.05	1.40	1.75	2.11	2.46	2.81	3.16
4000	0.00	0.36	0.72	1.08	1.44	1.80	2.16	2.52	2.88	3.24

$\frac{D-d}{A}$

Arc of contact on small pulley (degrees)

Factor G

Belt length correction factor C_L

Belt ref.	Corr. factor C _L	Belt ref.	Corr. factor C _L
PM	2286	0.88	
PM	2388	0.89	
PM	2515	0.90	
PM	2693	0.91	
PM	2832	0.92	
PM	2921	0.93	
PM	3010	0.94	
PM	3124	0.94	
PM	3327	0.96	
PM	3531	0.97	
PM	3734	0.98	
PM	4089	1.00	
PM	4191	1.01	
PM	4470	1.02	
PM	4648	1.03	
PM	5029	1.04	
PM	5410	1.06	
PM	6121	1.09	
PM	6502	1.10	
PM	6883	1.11	
PM	7646	1.13	
PM	8408	1.15	
PM	9169	1.17	

$$\text{Number of ribs required} = \frac{\text{Design kW}}{(A + B) \times G \times C_L}$$

POWER RATINGS POLYFLEX® JB™

Basic Watt per rib

5M-JB

RPM of faster shaft	26	28	30	32	34	36	38	40	42	45	48	50	53	56	63	67	71
585	75	96	116	136	156	176	195	215	234	264	293	312	341	369	436	473	511
700	85	109	133	156	180	203	226	250	273	307	341	364	398	431	509	554	598
725	87	112	136	161	185	209	233	257	281	316	352	375	410	445	525	571	616
870	98	127	156	185	214	242	271	299	327	369	410	438	479	520	615	669	723
950	104	136	167	198	229	260	291	321	352	397	442	472	517	561	664	722	780
1160	118	156	193	231	268	305	342	378	415	469	523	559	612	666	789	858	928
1450	134	181	227	272	318	363	408	453	498	564	630	674	739	804	955	1040	1125
1750	149	204	259	313	367	420	474	527	580	658	737	788	866	943	1121	1222	1322
2850	187	272	357	441	525	608	691	773	854	976	1097	1177	1296	1415	1689	1843	1997
3450	200	301	402	501	601	699	797	894	991	1135	1278	1373	1514	1654	1977	2159	2340
100	20	24	28	32	36	40	44	47	51	57	63	67	72	78	91	99	106
200	34	42	49	57	64	72	79	86	94	105	116	123	134	144	169	183	197
300	47	58	68	79	90	101	112	122	133	149	165	175	191	206	242	263	283
400	58	72	86	100	114	128	142	156	170	191	211	225	245	265	312	339	365
500	67	85	102	120	137	154	171	188	205	231	256	273	298	322	380	412	445
600	77	97	118	138	159	179	199	220	240	269	299	319	348	378	445	484	522
700	85	109	133	156	180	203	226	250	273	307	341	364	398	431	509	554	598
800	93	120	147	173	200	226	253	279	305	344	382	408	446	484	572	622	672
900	100	130	160	190	220	249	278	307	336	379	422	451	493	536	634	689	744
1000	107	140	173	206	238	271	303	335	367	414	462	493	540	586	694	755	816
1100	114	150	186	222	257	292	327	362	397	449	500	534	585	636	753	820	886
1200	120	159	198	237	275	313	351	389	426	482	538	575	630	685	812	884	955
1300	126	168	210	251	292	333	374	415	455	515	575	615	674	733	870	947	1024
1400	132	177	221	265	310	353	397	440	484	548	612	655	718	781	927	1009	1091
1500	137	185	232	279	326	373	419	466	512	580	648	693	761	828	983	1071	1158
1600	142	193	243	293	343	392	441	490	539	612	684	732	803	874	1039	1132	1224
1700	147	200	253	306	359	411	463	515	566	643	719	770	845	920	1094	1192	1289
1800	151	208	264	319	375	430	484	539	593	674	754	807	887	965	1148	1251	1354
1900	156	215	274	332	390	448	505	562	619	704	788	844	927	1010	1202	1310	1418
2000	160	222	283	344	405	466	526	586	645	734	822	881	968	1055	1255	1368	1481
2200	167	235	302	369	435	501	566	632	696	793	889	953	1048	1142	1360	1483	1606
2400	174	247	320	392	464	535	606	676	746	851	954	1023	1126	1228	1463	1596	1728
2600	180	259	337	414	491	568	644	720	795	907	1018	1092	1202	1312	1564	1707	1849
2800	186	270	353	436	518	600	681	762	843	962	1081	1160	1278	1394	1664	1816	1967
3000	191	280	369	457	544	631	718	804	889	1017	1143	1227	1352	1476	1762	1924	2084
3200	195	290	384	477	570	662	753	844	935	1070	1204	1292	1424	1556	1858	2029	2199
3400	199	299	398	497	595	692	788	884	980	1122	1263	1357	1496	1634	1953	2134	2312
3600	202	308	412	516	619	721	822	923	1024	1173	1322	1420	1567	1712	2047	2236	2423
3800	205	316	425	534	642	749	856	962	1067	1224	1379	1482	1636	1788	2139	2337	2533
4000	208	323	438	552	665	777	889	999	1110	1274	1436	1544	1704	1863	2230	2437	2641
4200	210	331	450	569	687	804	921	1036	1151	1322	1492	1604	1772	1937	2319	2535	2748
4400	212	337	462	586	709	831	952	1073	1192	1370	1547	1664	1838	2010	2408	2631	2853
4600	213	344	473	602	730	857	983	1108	1232	1418	1601	1722	1903	2082	2495	2726	2956
4800	214	350	484	618	751	882	1013	1143	1272	1464	1654	1780	1968	2153	2580	2820	3058
5000	214	355	495	633	771	907	1043	1177	1311	1510	1707	1837	2031	2223	2665	2913	3158
5200	215	360	505	648	790	932	1072	1211	1349	1555	1759	1893	2094	2292	2748	3004	3257
5400		365	514	663	810	956	1100	1244	1387	1599	1809	1948	2155	2360	2830	3094	3354
5600		369	524	677	828	979	1128	1277	1424	1643	1860	2003	2216	2427	2911	3182	3450
5800		373	532	690	847	1002	1156	1309	1460	1686	1909	2056	2276	2493	2990	3269	3544
6000		377	541	703	864	1024	1183	1340	1496	1728	1958	2109	2335	2558	3069	3355	3637
6200		380	549	716	882	1046	1209	1371	1531	1770	2006	2161	2393	2622	3146	3439	3728
6400		384	557	728	899	1068	1235	1401	1566	1811	2053	2213	2450	2685	3222	3522	3817
6600		386	564	740	915	1089	1260	1431	1600	1851	2099	2263	2506	2747	3296	3604	3906
6800		389	571	752	931	1109	1285	1460	1634	1891	2145	2313	2562	2808	3370	3684	3992
7000		391	578	763	947	1129	1310	1489	1666	1930	2190	2362	2617	2868	3442	3763	4077
7500		395	593	790	985	1178	1369	1558	1746	2025	2300	2481	2750	3014	3618	3954	4283
8000		397	606	814	1020	1223	1425	1625	1823	2116	2405	2595	2877	3155	3786	4137	4479
8500		397	618	836	1053	1267	1478	1688	1896	2203	2506	2705	2999	3289	3947	4311	4665
9000			627	856	1083	1307	1529	1748	1965	2286	2602	2810	3116	3418	4100	4476	4841
10000			640	890	1137	1381	1621	1859	2094	2441	2782	3005	3334	3657	4381	4778	5161

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

POWER RATINGS POLYFLEX® JB™

Basic Watt per rib for speed ratio

Arc of correction factor G

RPM of faster shaft	Speed Ratio										D - d A	Arc of contact on small pulley (degrees)	Factor G
	1.00 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.21	1.22 to 1.29	1.30 to 1.46	>1.47			
585	0	2	4	6	8	10	12	14	16	18	0.00	180	1.00
700	0	2	5	7	9	12	14	16	19	21	0.10	174	0.99
725	0	2	5	7	10	12	15	17	19	22	0.20	169	0.97
870	0	3	6	9	12	15	18	20	23	26	0.30	163	0.96
950	0	3	6	10	13	16	19	22	26	29	0.40	157	0.94
1160	0	4	8	12	16	19	23	27	31	35	0.50	151	0.93
1450	0	5	10	15	19	24	29	34	39	44	0.60	145	0.91
1750	0	6	12	18	24	29	35	41	47	53	0.70	139	0.89
2850	0	10	19	29	38	48	57	67	77	86	0.80	133	0.87
3450	0	12	23	35	46	58	69	81	93	104	0.90	127	0.85
100	0	0	1	1	1	2	2	2	3	3	1.00	120	0.82
200	0	1	1	2	3	3	4	5	5	6	1.10	113	0.80
300	0	1	2	3	4	5	6	7	8	9	1.20	106	0.77
400	0	1	3	4	5	7	8	9	11	12	1.30	99	0.73
500	0	2	3	5	7	8	10	12	13	15	1.40	91	0.70
600	0	2	4	6	8	10	12	14	16	18	1.50	83	0.65
700	0	2	5	7	9	12	14	16	19	21			
800	0	3	5	8	11	13	16	19	21	24			
900	0	3	6	9	12	15	18	21	24	27			
1000	0	3	7	10	13	17	20	23	27	30			
1100	0	4	7	11	15	18	22	26	30	33			
1200	0	4	8	12	16	20	24	28	32	36			
1300	0	4	9	13	17	22	26	31	35	39			
1400	0	5	9	14	19	23	28	33	38	42			
1500	0	5	10	15	20	25	30	35	40	45			
1600	0	5	11	16	21	27	32	38	43	48			
1700	0	6	11	17	23	29	34	40	46	51			
1800	0	6	12	18	24	30	36	42	48	54			
1900	0	6	13	19	26	32	38	45	51	57			
2000	0	7	13	20	27	34	40	47	54	60			
2200	0	7	15	22	30	37	44	52	59	66			
2400	0	8	16	24	32	40	48	56	64	72			
2600	0	9	17	26	35	44	52	61	70	78			
2800	0	9	19	28	38	47	56	66	75	85			
3000	0	10	20	30	40	50	60	70	81	91			
3200	0	11	22	32	43	54	64	75	86	97			
3400	0	11	23	34	46	57	68	80	91	103			
3600	0	12	24	36	48	60	72	85	97	109			
3800	0	13	26	38	51	64	77	89	102	115			
4000	0	13	27	40	54	67	81	94	107	121			
4200	0	14	28	42	56	70	85	99	113	127			
4400	0	15	30	44	59	74	89	103	118	133			
4600	0	15	31	46	62	77	93	108	124	139			
4800	0	16	32	48	64	81	97	113	129	145			
5000	0	17	34	50	67	84	101	117	134	151			
5200	0	17	35	52	70	87	105	122	140	157			
5400	0	18	36	54	73	91	109	127	145	163			
5600	0	19	38	56	75	94	113	132	150	169			
5800	0	19	39	58	78	97	117	136	156	175			
6000	0	20	40	60	81	101	121	141	161	181			
6200	0	21	42	62	83	104	125	146	167	187			
6400	0	21	43	64	86	107	129	150	172	193			
6600	0	22	44	66	89	111	133	155	177	199			
6800	0	23	46	68	91	114	137	160	183	205			
7000	0	23	47	70	94	117	141	164	188	211			
7500	0	25	50	75	101	126	151	176	201	226			
8000	0	27	54	80	107	134	161	188	215	242			
8500	0	28	57	85	114	143	171	200	228	257			
9000	0	30	61	91	121	151	181	211	242	272			
10000	0	33	67	101	134	168	201	235	269	302			

Belt length correction factor C _L			
Belt ref.	Corr. factor C _L	Belt ref.	Corr. factor C _L
5M-JB 280	0.83	5M-JB 800	1.14
5M-JB 290	0.84	5M-JB 825	1.15
5M-JB 300	0.85	5M-JB 850	1.16
5M-JB 307	0.86	5M-JB 875	1.17
5M-JB 315	0.87	5M-JB 900	1.17
5M-JB 325	0.88	5M-JB 925	1.18
5M-JB 335	0.89	5M-JB 950	1.19
5M-JB 345	0.89	5M-JB 975	1.20
5M-JB 355	0.90	5M-JB 1000	1.20
5M-JB 365	0.91	5M-JB 1030	1.21
5M-JB 375	0.92	5M-JB 1060	1.22
5M-JB 387	0.93	5M-JB 1090	1.23
5M-JB 400	0.94	5M-JB 1120	1.24
5M-JB 412	0.95	5M-JB 1150	1.25
5M-JB 425	0.96	5M-JB 1180	1.25
5M-JB 437	0.96	5M-JB 1220	1.26
5M-JB 450	0.97	5M-JB 1250	1.27
5M-JB 462	0.98	5M-JB 1280	1.28
5M-JB 475	0.99	5M-JB 1320	1.29
5M-JB 487	1.00	5M-JB 1360	1.29
5M-JB 500	1.00	5M-JB 1400	1.30
5M-JB 515	1.01	5M-JB 1450	1.31
5M-JB 530	1.02	5M-JB 1500	1.32
5M-JB 545	1.03		
5M-JB 560	1.04		
5M-JB 580	1.05		
5M-JB 600	1.06		
5M-JB 615	1.06		
5M-JB 630	1.07		
5M-JB 650	1.08		
5M-JB 670	1.09		
5M-JB 690	1.10		
5M-JB 710	1.10		
5M-JB 730	1.11		
5M-JB 750	1.12		
5M-JB 775	1.13		

$$\text{Number of ribs required} = \frac{\text{Design kW} \times 1000}{(A + B) \times G \times C_L}$$



POWER RATINGS POLYFLEX® JB™

Basic kW per rib

7M-JB

RPM of faster shaft	42	45	48	50	53	56	63	67	71	75	80	85	90	95	100	106	112
585	0.30	0.36	0.42	0.45	0.51	0.57	0.70	0.77	0.85	0.92	1.01	1.10	1.19	1.28	1.37	1.48	1.59
700	0.35	0.41	0.48	0.53	0.59	0.66	0.81	0.90	0.99	1.07	1.18	1.29	1.40	1.50	1.61	1.73	1.86
725	0.36	0.43	0.50	0.54	0.61	0.68	0.84	0.93	1.02	1.11	1.22	1.33	1.44	1.55	1.66	1.79	1.92
870	0.41	0.49	0.57	0.63	0.71	0.79	0.98	1.09	1.19	1.30	1.43	1.56	1.69	1.82	1.95	2.10	2.25
950	0.44	0.53	0.62	0.67	0.76	0.85	1.05	1.17	1.29	1.40	1.54	1.68	1.82	1.96	2.10	2.27	2.44
1160	0.51	0.61	0.72	0.79	0.90	1.00	1.25	1.39	1.52	1.66	1.83	2.00	2.17	2.34	2.51	2.70	2.90
1450	0.60	0.73	0.86	0.95	1.08	1.20	1.50	1.67	1.84	2.01	2.22	2.43	2.63	2.84	3.04	3.28	3.53
1750	0.68	0.84	0.99	1.10	1.25	1.40	1.76	1.96	2.16	2.36	2.60	2.85	3.09	3.33	3.58	3.86	4.15
2850	0.94	1.19	1.43	1.59	1.83	2.06	2.61	2.92	3.23	3.53	3.91	4.29	4.66	5.03	5.39	5.83	6.26
3450	1.06	1.35	1.63	1.82	2.11	2.39	3.03	3.40	3.76	4.12	4.57	5.01	5.44	5.87	6.30	6.80	7.30
100	0.07	0.08	0.09	0.10	0.11	0.12	0.15	0.16	0.18	0.19	0.21	0.23	0.25	0.26	0.28	0.30	0.32
200	0.13	0.15	0.17	0.18	0.21	0.23	0.28	0.30	0.33	0.36	0.39	0.43	0.46	0.49	0.53	0.57	0.61
300	0.18	0.21	0.24	0.26	0.29	0.32	0.39	0.43	0.47	0.51	0.56	0.61	0.66	0.71	0.76	0.82	0.87
400	0.22	0.26	0.30	0.33	0.37	0.41	0.50	0.56	0.61	0.66	0.72	0.79	0.85	0.92	0.98	1.05	1.13
500	0.27	0.32	0.37	0.40	0.45	0.50	0.61	0.67	0.74	0.80	0.88	0.96	1.04	1.12	1.19	1.29	1.38
600	0.31	0.37	0.42	0.46	0.52	0.58	0.71	0.79	0.86	0.94	1.03	1.13	1.22	1.31	1.40	1.51	1.62
700	0.35	0.41	0.48	0.53	0.59	0.66	0.81	0.90	0.99	1.07	1.18	1.29	1.40	1.50	1.61	1.73	1.86
800	0.38	0.46	0.54	0.59	0.66	0.74	0.91	1.01	1.11	1.21	1.33	1.45	1.57	1.69	1.81	1.95	2.09
900	0.42	0.50	0.59	0.65	0.73	0.81	1.01	1.12	1.23	1.34	1.47	1.61	1.74	1.87	2.01	2.16	2.32
1000	0.45	0.55	0.64	0.70	0.80	0.89	1.10	1.22	1.34	1.46	1.61	1.76	1.91	2.05	2.20	2.37	2.55
1100	0.49	0.59	0.69	0.76	0.86	0.96	1.19	1.33	1.46	1.59	1.75	1.91	2.07	2.23	2.39	2.58	2.77
1200	0.52	0.63	0.74	0.81	0.92	1.03	1.28	1.43	1.57	1.71	1.89	2.06	2.24	2.41	2.58	2.79	2.99
1300	0.55	0.67	0.79	0.87	0.98	1.10	1.37	1.53	1.68	1.83	2.02	2.21	2.40	2.58	2.77	2.99	3.21
1400	0.58	0.71	0.84	0.92	1.05	1.17	1.46	1.63	1.79	1.95	2.15	2.35	2.55	2.75	2.95	3.19	3.42
1500	0.61	0.75	0.88	0.97	1.10	1.24	1.55	1.72	1.90	2.07	2.28	2.50	2.71	2.92	3.13	3.38	3.63
1600	0.64	0.78	0.93	1.02	1.16	1.30	1.63	1.82	2.00	2.19	2.41	2.64	2.86	3.09	3.31	3.58	3.84
1700	0.67	0.82	0.97	1.07	1.22	1.37	1.72	1.91	2.11	2.30	2.54	2.78	3.02	3.25	3.49	3.77	4.05
1800	0.69	0.85	1.01	1.12	1.28	1.43	1.80	2.01	2.21	2.41	2.67	2.92	3.17	3.42	3.66	3.96	4.25
1900	0.72	0.89	1.06	1.17	1.33	1.50	1.88	2.10	2.31	2.53	2.79	3.06	3.32	3.58	3.84	4.14	4.45
2000	0.75	0.92	1.10	1.21	1.39	1.56	1.96	2.19	2.41	2.64	2.91	3.19	3.46	3.74	4.01	4.33	4.65
2200	0.80	0.99	1.18	1.31	1.50	1.68	2.12	2.37	2.61	2.86	3.16	3.46	3.76	4.05	4.34	4.69	5.04
2400	0.84	1.05	1.26	1.40	1.60	1.80	2.27	2.54	2.81	3.07	3.39	3.72	4.04	4.36	4.67	5.05	5.42
2600	0.89	1.11	1.33	1.48	1.70	1.92	2.43	2.71	3.00	3.28	3.63	3.97	4.32	4.66	5.00	5.40	5.80
2800	0.93	1.17	1.41	1.57	1.80	2.03	2.57	2.88	3.18	3.48	3.86	4.23	4.59	4.95	5.31	5.74	6.17
3000	0.97	1.23	1.48	1.65	1.90	2.15	2.72	3.04	3.36	3.68	4.08	4.47	4.86	5.24	5.62	6.08	6.52
3200	1.01	1.28	1.55	1.73	1.99	2.25	2.86	3.20	3.54	3.88	4.30	4.71	5.12	5.53	5.93	6.40	6.88
3400	1.05	1.34	1.62	1.80	2.08	2.36	3.00	3.36	3.72	4.07	4.51	4.95	5.38	5.80	6.22	6.72	7.22
3600	1.09	1.39	1.68	1.88	2.17	2.46	3.14	3.52	3.89	4.26	4.72	5.18	5.63	6.07	6.52	7.04	7.55
3800	1.12	1.44	1.75	1.95	2.26	2.57	3.27	3.67	4.06	4.45	4.93	5.41	5.88	6.34	6.80	7.34	7.88
4000	1.16	1.48	1.81	2.03	2.35	2.67	3.40	3.81	4.22	4.63	5.13	5.63	6.12	6.60	7.08	7.64	8.19
4200	1.19	1.53	1.87	2.09	2.43	2.76	3.53	3.96	4.39	4.81	5.33	5.84	6.35	6.85	7.35	7.93	8.50
4400	1.22	1.57	1.93	2.16	2.51	2.86	3.65	4.10	4.54	4.98	5.52	6.06	6.58	7.10	7.61	8.21	8.80
4600	1.25	1.62	1.99	2.23	2.59	2.95	3.77	4.24	4.70	5.15	5.71	6.26	6.81	7.34	7.87	8.49	9.09
4800	1.27	1.66	2.04	2.29	2.67	3.04	3.89	4.37	4.85	5.32	5.90	6.47	7.02	7.58	8.12	8.75	9.37
5000	1.30	1.70	2.09	2.35	2.74	3.13	4.01	4.51	5.00	5.48	6.08	6.66	7.24	7.80	8.36	9.01	9.65
5200	1.33	1.74	2.15	2.41	2.82	3.21	4.13	4.64	5.14	5.64	6.25	6.86	7.45	8.03	8.59	9.26	9.91
5400	1.35	1.77	2.20	2.47	2.89	3.30	4.24	4.76	5.28	5.80	6.42	7.04	7.65	8.24	8.82	9.50	10.16
5600	1.37	1.81	2.24	2.53	2.96	3.38	4.35	4.89	5.42	5.95	6.59	7.22	7.84	8.45	9.04	9.73	10.40
5800	1.39	1.84	2.29	2.59	3.02	3.46	4.45	5.01	5.56	6.09	6.76	7.40	8.03	8.65	9.26	9.96	10.64
6000	1.41	1.88	2.34	2.64	3.09	3.54	4.56	5.13	5.69	6.24	6.91	7.57	8.22	8.85	9.46	10.17	10.86
6200	1.43	1.91	2.38	2.69	3.15	3.61	4.66	5.24	5.81	6.38	7.07	7.74	8.40	9.04	9.66	10.38	11.07
6400	1.45	1.94	2.42	2.74	3.22	3.68	4.75	5.35	5.94	6.51	7.22	7.90	8.57	9.22	9.85	10.58	11.28
6600	1.46	1.97	2.46	2.79	3.28	3.75	4.85	5.46	6.06	6.64	7.36	8.06	8.74	9.39	10.03	10.76	11.47
6800	1.48	1.99	2.50	2.84	3.33	3.82	4.94	5.56	6.17	6.77	7.50	8.21	8.90	9.56	10.20	10.94	11.65
7000	1.49	2.02	2.54	2.88	3.39	3.89	5.03	5.67	6.29	6.89	7.64	8.35	9.05	9.72	10.37	11.11	
7500	1.52	2.08	2.63	2.99	3.52	4.05	5.24	5.91	6.55	7.18	7.95	8.69	9.40	10.09	10.74		
8000	1.54	2.13	2.70	3.08	3.64	4.19	5.44	6.13	6.80	7.45	8.23	8.99	9.71	10.40			
8500	1.56	2.17	2.77	3.16	3.75	4.32	5.61	6.32	7.01	7.68	8.48	9.25					
9000		2.20	2.82	3.24	3.84	4.43	5.77	6.50	7.21	7.89	8.70						
10000		2.23	2.91	3.34	3.99	4.62	6.02	6.78	7.51	8.21							

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

POWER RATINGS POLYFLEX® JB™

Basic kW per rib for speed ratio

Arc of correction factor G

RPM of faster shaft	Speed Ratio										$\frac{D-d}{A}$	Arc of contact on small pulley (degrees)	Factor G
	1.00 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.21	1.22 to 1.29	1.30 to 1.46	>1.47			
585	0.000	0.005	0.011	0.016	0.022	0.027	0.033	0.038	0.044	0.049	0.00	180	1.00
700	0.000	0.007	0.013	0.020	0.026	0.033	0.039	0.046	0.052	0.059	0.10	174	0.99
725	0.000	0.007	0.014	0.020	0.027	0.034	0.041	0.047	0.054	0.061	0.20	169	0.97
870	0.000	0.008	0.016	0.024	0.033	0.041	0.049	0.057	0.065	0.073	0.30	163	0.96
950	0.000	0.009	0.018	0.027	0.036	0.044	0.053	0.062	0.071	0.080	0.40	157	0.94
1160	0.000	0.011	0.022	0.032	0.043	0.054	0.065	0.076	0.087	0.097	0.50	151	0.93
1450	0.000	0.013	0.027	0.041	0.054	0.068	0.081	0.095	0.108	0.122	0.60	145	0.91
1750	0.000	0.016	0.033	0.049	0.065	0.082	0.098	0.114	0.131	0.147	0.70	139	0.89
2850	0.000	0.026	0.053	0.080	0.107	0.133	0.160	0.186	0.213	0.239	0.80	133	0.87
3450	0.000	0.032	0.065	0.097	0.129	0.161	0.193	0.226	0.258	0.290	0.90	127	0.85
100	0.000	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.007	0.008	1.00	120	0.82
200	0.000	0.002	0.004	0.006	0.007	0.009	0.011	0.013	0.015	0.017	1.10	113	0.80
300	0.000	0.003	0.006	0.008	0.011	0.014	0.017	0.020	0.022	0.025	1.20	106	0.77
400	0.000	0.004	0.007	0.011	0.015	0.019	0.022	0.026	0.030	0.034	1.30	99	0.73
500	0.000	0.005	0.009	0.014	0.019	0.023	0.028	0.033	0.037	0.042	1.40	91	0.70
600	0.000	0.006	0.011	0.017	0.022	0.028	0.034	0.039	0.045	0.050	1.50	83	0.65
700	0.000	0.007	0.013	0.020	0.026	0.033	0.039	0.046	0.052	0.059			
800	0.000	0.007	0.015	0.022	0.030	0.037	0.045	0.052	0.060	0.067			
900	0.000	0.008	0.017	0.025	0.034	0.042	0.050	0.059	0.067	0.076			
1000	0.000	0.009	0.019	0.028	0.037	0.047	0.056	0.065	0.075	0.084			
1100	0.000	0.010	0.021	0.031	0.041	0.051	0.062	0.072	0.082	0.092			
1200	0.000	0.011	0.022	0.034	0.045	0.056	0.067	0.078	0.090	0.101			
1300	0.000	0.012	0.024	0.036	0.049	0.061	0.073	0.085	0.097	0.109			
1400	0.000	0.013	0.026	0.039	0.052	0.065	0.078	0.092	0.105	0.118			
1500	0.000	0.014	0.028	0.042	0.056	0.070	0.084	0.098	0.112	0.126			
1600	0.000	0.015	0.030	0.045	0.060	0.075	0.090	0.105	0.120	0.134			
1700	0.000	0.016	0.032	0.048	0.064	0.079	0.095	0.111	0.127	0.143			
1800	0.000	0.017	0.034	0.050	0.067	0.084	0.101	0.118	0.135	0.151			
1900	0.000	0.018	0.036	0.053	0.071	0.089	0.106	0.124	0.142	0.160			
2000	0.000	0.019	0.037	0.056	0.075	0.093	0.112	0.131	0.149	0.168			
2200	0.000	0.020	0.041	0.062	0.082	0.103	0.123	0.144	0.164	0.185			
2400	0.000	0.022	0.045	0.067	0.090	0.112	0.134	0.157	0.179	0.202			
2600	0.000	0.024	0.049	0.073	0.097	0.121	0.146	0.170	0.194	0.218			
2800	0.000	0.026	0.052	0.078	0.105	0.131	0.157	0.183	0.209	0.235			
3000	0.000	0.028	0.056	0.084	0.112	0.140	0.168	0.196	0.224	0.252			
3200	0.000	0.030	0.060	0.090	0.120	0.149	0.179	0.209	0.239	0.269			
3400	0.000	0.032	0.064	0.095	0.127	0.159	0.191	0.222	0.254	0.286			
3600	0.000	0.033	0.067	0.101	0.135	0.168	0.202	0.235	0.269	0.302			
3800	0.000	0.035	0.071	0.106	0.142	0.177	0.213	0.248	0.284	0.319			
4000	0.000	0.037	0.075	0.112	0.150	0.187	0.224	0.262	0.299	0.336			
4200	0.000	0.039	0.079	0.118	0.157	0.196	0.235	0.275	0.314	0.353			
4400	0.000	0.041	0.082	0.123	0.164	0.205	0.247	0.288	0.329	0.370			
4600	0.000	0.043	0.086	0.129	0.172	0.215	0.258	0.301	0.344	0.386			
4800	0.000	0.045	0.090	0.134	0.179	0.224	0.269	0.314	0.359	0.403			
5000	0.000	0.046	0.094	0.140	0.187	0.233	0.280	0.327	0.374	0.420			
5200	0.000	0.048	0.097	0.146	0.194	0.243	0.291	0.340	0.389	0.437			
5400	0.000	0.050	0.101	0.151	0.202	0.252	0.303	0.353	0.404	0.454			
5600	0.000	0.052	0.105	0.157	0.209	0.262	0.314	0.366	0.419	0.471			
5800	0.000	0.054	0.109	0.162	0.217	0.271	0.325	0.379	0.434	0.487			
6000	0.000	0.056	0.112	0.168	0.224	0.280	0.336	0.392	0.448	0.504			
6200	0.000	0.058	0.116	0.174	0.232	0.290	0.347	0.405	0.463	0.521			
6400	0.000	0.059	0.120	0.179	0.239	0.299	0.359	0.418	0.478	0.538			
6600	0.000	0.061	0.124	0.185	0.247	0.308	0.370	0.432	0.493	0.555			
6800	0.000	0.063	0.127	0.190	0.254	0.318	0.381	0.445	0.508	0.571			
7000	0.000	0.065	0.131	0.196	0.262	0.327	0.392	0.458	0.523	0.588			
7500	0.000	0.070	0.140	0.210	0.280	0.350	0.420	0.490	0.561	0.630			
8000	0.000	0.074	0.150	0.224	0.299	0.374	0.448	0.523	0.598	0.672			
8500	0.000	0.079	0.159	0.238	0.318	0.397	0.476	0.556	0.635	0.714			
9000	0.000	0.084	0.169	0.252	0.336	0.420	0.504	0.588	0.673	0.756			
10000	0.000	0.093	0.187	0.280	0.374	0.467	0.560	0.654	0.747	0.840			

Belt length correction factor C_L

Belt ref.	Corr. factor C_L	Belt ref.	Corr. factor C_L
7M-JB 500	0.87	7M-JB 1400	1.13
7M-JB 515	0.88	7M-JB 1450	1.14
7M-JB 530	0.88	7M-JB 1500	1.15
7M-JB 545	0.89	7M-JB 1550	1.15
7M-JB 560	0.90	7M-JB 1600	1.16
7M-JB 580	0.91	7M-JB 1650	1.17
7M-JB 600	0.91	7M-JB 1700	1.18
7M-JB 615	0.92	7M-JB 1750	1.19
7M-JB 630	0.93	7M-JB 1800	1.19
7M-JB 650	0.94	7M-JB 1850	1.20
7M-JB 670	0.94	7M-JB 1900	1.21
7M-JB 690	0.95	7M-JB 1950	1.21
7M-JB 710	0.96	7M-JB 2000	1.22
7M-JB 730	0.96	7M-JB 2060	1.23
7M-JB 750	0.97	7M-JB 2120	1.23
7M-JB 775	0.98	7M-JB 2180	1.24
7M-JB 800	0.99	7M-JB 2240	1.25
7M-JB 825	1.00	7M-JB 2300	1.25
7M-JB 850	1.00		
7M-JB 875	1.01		
7M-JB 900	1.02		
7M-JB 925	1.02		
7M-JB 950	1.03		
7M-JB 975	1.04		
7M-JB 1000	1.04		
7M-JB 1030	1.05		
7M-JB 1060	1.06		
7M-JB 1090	1.07		
7M-JB 1120	1.07		
7M-JB 1150	1.08		
7M-JB 1180	1.09		
7M-JB 1220	1.09		
7M-JB 1250	1.10		
7M-JB 1280	1.11		
7M-JB 1320	1.11		
7M-JB 1360	1.12		

$$\text{Number of ribs required} = \frac{\text{Design kW}}{(A + B) \times G \times C_L}$$

POWER RATINGS POLYFLEX® JB™

Basic kW per rib

11M-JB

RPM of faster shaft	67	71	75	80	85	90	95	100	106	112	118	125	132	140	150	160	170
585	1.01	1.16	1.30	1.48	1.66	1.84	2.02	2.19	2.40	2.61	2.82	3.07	3.31	3.58	3.93	4.27	4.61
700	1.17	1.35	1.52	1.73	1.94	2.15	2.36	2.57	2.82	3.06	3.31	3.60	3.88	4.21	4.61	5.01	5.41
725	1.21	1.39	1.56	1.78	2.00	2.22	2.43	2.65	2.90	3.16	3.42	3.71	4.01	4.34	4.76	5.17	5.59
870	1.40	1.61	1.82	2.08	2.34	2.59	2.85	3.10	3.41	3.71	4.01	4.36	4.71	5.11	5.60	6.09	6.58
950	1.51	1.73	1.96	2.24	2.52	2.80	3.07	3.35	3.68	4.01	4.34	4.72	5.09	5.52	6.06	6.59	7.11
1160	1.77	2.04	2.31	2.65	2.98	3.32	3.65	3.98	4.38	4.77	5.17	5.62	6.07	6.59	7.23	7.86	8.49
1450	2.11	2.44	2.77	3.19	3.60	4.01	4.42	4.82	5.31	5.79	6.27	6.83	7.38	8.01	8.79	9.56	10.33
1750	2.44	2.84	3.23	3.72	4.21	4.70	5.18	5.66	6.23	6.80	7.37	8.03	8.68	9.42	10.34	11.24	12.14
2850	3.51	4.12	4.73	5.49	6.25	6.99	7.73	8.47	9.34	10.20	11.06	12.05	13.02	14.12	15.48	16.80	18.10
3450	4.01	4.73	5.45	6.35	7.23	8.11	8.98	9.83	10.85	11.86	12.85	13.99	15.11	16.36	17.90	19.39	20.84
100	0.23	0.25	0.28	0.32	0.35	0.39	0.42	0.45	0.49	0.53	0.58	0.62	0.67	0.72	0.79	0.85	0.92
200	0.41	0.46	0.52	0.58	0.65	0.72	0.78	0.85	0.92	1.00	1.08	1.17	1.26	1.36	1.49	1.61	1.74
300	0.58	0.66	0.74	0.83	0.93	1.02	1.12	1.21	1.33	1.44	1.55	1.68	1.81	1.96	2.15	2.33	2.52
400	0.74	0.84	0.94	1.07	1.19	1.32	1.44	1.57	1.72	1.86	2.01	2.18	2.35	2.55	2.79	3.03	3.27
500	0.89	1.02	1.14	1.29	1.45	1.60	1.76	1.91	2.09	2.27	2.45	2.66	2.87	3.11	3.41	3.70	4.00
600	1.04	1.18	1.33	1.51	1.70	1.88	2.06	2.24	2.46	2.67	2.89	3.14	3.38	3.67	4.02	4.37	4.71
700	1.17	1.35	1.52	1.73	1.94	2.15	2.36	2.57	2.82	3.06	3.31	3.60	3.88	4.21	4.61	5.01	5.41
800	1.31	1.50	1.70	1.94	2.17	2.41	2.65	2.88	3.17	3.45	3.73	4.05	4.37	4.74	5.20	5.65	6.10
900	1.44	1.66	1.87	2.14	2.40	2.67	2.93	3.20	3.51	3.82	4.13	4.50	4.86	5.26	5.77	6.28	6.78
1000	1.57	1.81	2.04	2.34	2.63	2.92	3.21	3.50	3.85	4.19	4.54	4.93	5.33	5.78	6.34	6.89	7.45
1100	1.69	1.95	2.21	2.53	2.85	3.17	3.49	3.80	4.18	4.56	4.93	5.36	5.80	6.29	6.90	7.50	8.10
1200	1.81	2.10	2.38	2.72	3.07	3.42	3.76	4.10	4.51	4.92	5.32	5.79	6.26	6.79	7.45	8.10	8.75
1300	1.93	2.24	2.54	2.91	3.29	3.66	4.03	4.39	4.83	5.27	5.70	6.21	6.71	7.28	7.99	8.69	9.39
1400	2.05	2.37	2.70	3.10	3.50	3.89	4.29	4.68	5.15	5.62	6.08	6.62	7.16	7.77	8.52	9.27	10.01
1500	2.16	2.51	2.85	3.28	3.70	4.13	4.55	4.97	5.47	5.96	6.46	7.03	7.60	8.25	9.05	9.85	10.63
1600	2.27	2.64	3.01	3.46	3.91	4.36	4.80	5.25	5.78	6.30	6.83	7.43	8.04	8.72	9.57	10.41	11.24
1700	2.38	2.77	3.16	3.63	4.11	4.58	5.06	5.52	6.08	6.64	7.19	7.83	8.47	9.19	10.08	10.97	11.85
1800	2.49	2.90	3.30	3.81	4.31	4.81	5.30	5.80	6.39	6.97	7.55	8.22	8.89	9.65	10.59	11.52	12.44
1900	2.60	3.02	3.45	3.98	4.51	5.03	5.55	6.07	6.68	7.30	7.91	8.61	9.31	10.11	11.09	12.06	13.02
2000	2.70	3.15	3.59	4.15	4.70	5.25	5.79	6.33	6.98	7.62	8.26	8.99	9.73	10.55	11.58	12.59	13.59
2200	2.90	3.39	3.88	4.48	5.08	5.68	6.27	6.86	7.56	8.25	8.94	9.74	10.54	11.43	12.54	13.64	14.72
2400	3.09	3.62	4.15	4.80	5.45	6.09	6.73	7.37	8.12	8.87	9.62	10.48	11.33	12.29	13.48	14.65	15.80
2600	3.28	3.85	4.41	5.11	5.81	6.50	7.18	7.86	8.67	9.47	10.27	11.19	12.09	13.12	14.38	15.63	16.85
2800	3.46	4.07	4.67	5.42	6.16	6.89	7.62	8.35	9.21	10.06	10.90	11.88	12.84	13.93	15.26	16.57	17.85
3000	3.64	4.28	4.92	5.71	6.50	7.28	8.05	8.82	9.73	10.63	11.52	12.55	13.56	14.71	16.11	17.48	18.82
3200	3.81	4.49	5.16	6.00	6.83	7.65	8.47	9.28	10.24	11.19	12.12	13.20	14.26	15.46	16.92	18.35	19.75
3400	3.97	4.69	5.40	6.28	7.15	8.02	8.88	9.72	10.73	11.72	12.70	13.83	14.94	16.19	17.71	19.19	20.63
3600	4.12	4.88	5.62	6.55	7.47	8.37	9.27	10.16	11.21	12.25	13.27	14.44	15.59	16.88	18.46	19.99	21.46
3800	4.27	5.06	5.84	6.81	7.77	8.72	9.65	10.58	11.67	12.75	13.81	15.03	16.22	17.56	19.18	20.74	22.25
4000	4.42	5.24	6.06	7.07	8.06	9.05	10.02	10.98	12.12	13.24	14.34	15.59	16.82	18.20	19.86	21.46	23.00
4200	4.56	5.41	6.26	7.31	8.35	9.37	10.38	11.38	12.55	13.71	14.84	16.14	17.40	18.81	20.50	22.13	23.69
4400	4.69	5.58	6.46	7.55	8.62	9.68	10.73	11.76	12.97	14.16	15.33	16.66	17.95	19.39	21.11	22.76	24.33
4600	4.82	5.74	6.65	7.78	8.89	9.98	11.06	12.12	13.37	14.59	15.79	17.15	18.47	19.93	21.68	23.34	
4800	4.94	5.89	6.84	8.00	9.15	10.27	11.38	12.47	13.76	15.01	16.23	17.62	18.97	20.45	22.21		
5000	5.05	6.04	7.01	8.21	9.39	10.55	11.69	12.81	14.12	15.40	16.65	18.07	19.43	20.93	22.70		
5200	5.16	6.18	7.18	8.41	9.63	10.82	11.99	13.13	14.47	15.78	17.05	18.48	19.86	21.37			
5400	5.26	6.31	7.34	8.61	9.85	11.07	12.27	13.44	14.81	16.14	17.43	18.88	20.27	21.78			
5600	5.36	6.43	7.49	8.79	10.07	11.32	12.54	13.73	15.12	16.47	17.78	19.24	20.64				
5800	5.45	6.55	7.64	8.97	10.27	11.55	12.79	14.01	15.42	16.79	18.10	19.58					
6000	5.53	6.66	7.77	9.14	10.47	11.76	13.03	14.26	15.70	17.08	18.41	19.89					
6200	5.61	6.77	7.90	9.29	10.65	11.97	13.26	14.51	15.96	17.35	18.68						
6400	5.68	6.86	8.02	9.44	10.82	12.16	13.47	14.73	16.20	17.60	18.94						
6600	5.75	6.95	8.13	9.58	10.98	12.34	13.66	14.94	16.42	17.82							
6800	5.81	7.03	8.24	9.70	11.13	12.51	13.84	15.13	16.61	18.02							
7000	5.86	7.11	8.33	9.82	11.26	12.66	14.01	15.31	16.79								
7500	5.96	7.26	8.53	10.07	11.55	12.98	14.35	15.66									
8000	6.01	7.36	8.67	10.25	11.76	13.21	14.58										
8500		7.41	8.75	10.36	11.89												
9000																	
10000																	

For speeds over 30 m/s we recommend that pulleys be dynamically balanced.

POWER RATINGS POLYFLEX® JB™

Basic kW per rib for speed ratio

Arc of correction factor G

RPM of faster shaft	Basic kW per rib for speed ratio										D - d A	Arc of contact on small pulley (degrees)	Factor G	
	1.00 to 1.01	1.02 to 1.03	1.04 to 1.05	1.06 to 1.08	1.09 to 1.11	1.12 to 1.15	1.16 to 1.21	1.22 to 1.29	1.30 to 1.46	>1.47				
585	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.12	0.14	0.00	180	1.00	
700	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.15	0.16	0.10	174	0.99	
725	0.00	0.02	0.04	0.06	0.08	0.09	0.11	0.13	0.15	0.17	0.20	169	0.97	
870	0.00	0.02	0.05	0.07	0.09	0.11	0.14	0.16	0.18	0.20	0.30	163	0.96	
950	0.00	0.02	0.05	0.07	0.10	0.12	0.15	0.17	0.20	0.22	0.40	157	0.94	
1160	0.00	0.03	0.06	0.09	0.12	0.15	0.18	0.21	0.24	0.27	0.50	151	0.93	
1450	0.00	0.04	0.08	0.11	0.15	0.19	0.23	0.26	0.30	0.34	0.60	145	0.91	
1750	0.00	0.05	0.09	0.14	0.18	0.23	0.27	0.32	0.37	0.41	0.70	139	0.89	
2850	0.00	0.07	0.15	0.22	0.30	0.37	0.45	0.52	0.59	0.67	0.80	133	0.87	
3450	0.00	0.09	0.18	0.27	0.36	0.45	0.54	0.63	0.72	0.81	0.90	127	0.85	
100	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	1.00	120	0.82	
200	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.05	1.10	113	0.80	
300	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.07	1.20	106	0.77	
400	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	1.30	99	0.73	
500	0.00	0.01	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.12	1.40	91	0.70	
600	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.11	0.13	0.14	1.50	83	0.65	
700	0.00	0.02	0.04	0.05	0.07	0.09	0.11	0.13	0.15	0.16				
800	0.00	0.02	0.04	0.06	0.08	0.10	0.13	0.15	0.17	0.19				
900	0.00	0.02	0.05	0.07	0.09	0.12	0.14	0.16	0.19	0.21				
1000	0.00	0.03	0.05	0.08	0.10	0.13	0.16	0.18	0.21	0.23				
1100	0.00	0.03	0.06	0.09	0.11	0.14	0.17	0.20	0.23	0.26				
1200	0.00	0.03	0.06	0.09	0.13	0.16	0.19	0.22	0.25	0.28				
1300	0.00	0.03	0.07	0.10	0.14	0.17	0.20	0.24	0.27	0.30				
1400	0.00	0.04	0.07	0.11	0.15	0.18	0.22	0.26	0.29	0.33				
1500	0.00	0.04	0.08	0.12	0.16	0.20	0.23	0.27	0.31	0.35	11M-JB 710	0.90	11M-JB 2000	1.15
1600	0.00	0.04	0.08	0.12	0.17	0.21	0.25	0.29	0.33	0.38	11M-JB 730	0.91	11M-JB 2060	1.15
1700	0.00	0.04	0.09	0.13	0.18	0.22	0.27	0.31	0.35	0.40	11M-JB 750	0.91	11M-JB 2120	1.16
1800	0.00	0.05	0.09	0.14	0.19	0.23	0.28	0.33	0.38	0.42	11M-JB 775	0.92	11M-JB 2180	1.17
1900	0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	11M-JB 800	0.93	11M-JB 2240	1.17
2000	0.00	0.05	0.10	0.16	0.21	0.26	0.31	0.36	0.42	0.47	11M-JB 825	0.94	11M-JB 2300	1.18
2200	0.00	0.06	0.11	0.17	0.23	0.29	0.34	0.40	0.46	0.52	11M-JB 850	0.94		
2400	0.00	0.06	0.13	0.19	0.25	0.31	0.38	0.44	0.50	0.56	11M-JB 875	0.95		
2600	0.00	0.07	0.14	0.20	0.27	0.34	0.41	0.47	0.54	0.61	11M-JB 900	0.96		
2800	0.00	0.07	0.15	0.22	0.29	0.36	0.44	0.51	0.58	0.66	11M-JB 925	0.96		
3000	0.00	0.08	0.16	0.23	0.31	0.39	0.47	0.55	0.63	0.70	11M-JB 950	0.97		
3200	0.00	0.08	0.17	0.25	0.33	0.42	0.50	0.58	0.67	0.75	11M-JB 975	0.98		
3400	0.00	0.09	0.18	0.27	0.35	0.44	0.53	0.62	0.71	0.80	11M-JB 1000	0.98		
3600	0.00	0.09	0.19	0.28	0.38	0.47	0.56	0.66	0.75	0.84	11M-JB 1030	0.99		
3800	0.00	0.10	0.20	0.30	0.40	0.50	0.59	0.69	0.79	0.89	11M-JB 1060	1.00		
4000	0.00	0.10	0.21	0.31	0.42	0.52	0.63	0.73	0.83	0.94	11M-JB 1090	1.00		
4200	0.00	0.11	0.22	0.33	0.44	0.55	0.66	0.77	0.88	0.98	11M-JB 1120	1.01		
4400	0.00	0.11	0.23	0.34	0.46	0.57	0.69	0.80	0.92	1.03	11M-JB 1150	1.02		
4600	0.00	0.12	0.24	0.36	0.48	0.60	0.72	0.84	0.96	1.08	11M-JB 1180	1.02		
4800	0.00	0.12	0.25	0.37	0.50	0.63	0.75	0.88	1.00	1.13	11M-JB 1220	1.03		
5000	0.00	0.13	0.26	0.39	0.52	0.65	0.78	0.91	1.04	1.17	11M-JB 1250	1.04		
5200	0.00	0.13	0.27	0.41	0.54	0.68	0.81	0.95	1.08	1.22	11M-JB 1280	1.04		
5400	0.00	0.14	0.28	0.42	0.56	0.70	0.84	0.99	1.13	1.27	11M-JB 1320	1.05		
5600	0.00	0.15	0.29	0.44	0.58	0.73	0.88	1.02	1.17	1.31	11M-JB 1360	1.06		
5800	0.00	0.15	0.30	0.45	0.61	0.76	0.91	1.06	1.21	1.36	11M-JB 1400	1.06		
6000	0.00	0.16	0.31	0.47	0.63	0.78	0.94	1.09	1.25	1.41	11M-JB 1450	1.07		
6200	0.00	0.16	0.32	0.48	0.65	0.81	0.97	1.13	1.29	1.45	11M-JB 1500	1.08		
6400	0.00	0.17	0.33	0.50	0.67	0.83	1.00	1.17	1.34	1.50	11M-JB 1550	1.09		
6600	0.00	0.17	0.34	0.52	0.69	0.86	1.03	1.20	1.38	1.55	11M-JB 1600	1.09		
6800	0.00	0.18	0.36	0.53	0.71	0.89	1.06	1.24	1.42	1.59	11M-JB 1650	1.10		
7000	0.00	0.18	0.37	0.55	0.73	0.91	1.09	1.28	1.46	1.64	11M-JB 1700	1.11		
7500	0.00	0.19	0.39	0.59	0.78	0.98	1.17	1.37	1.56	1.76	11M-JB 1750	1.12		
8000	0.00	0.21	0.42	0.62	0.83	1.04	1.25	1.46	1.67	1.88	11M-JB 1800	1.12		
8500	0.00	0.22	0.44	0.66	0.89	1.11	1.33	1.55	1.77	1.99	11M-JB 1850	1.13		
9000	0.00	0.23	0.47	0.70	0.94	1.17	1.41	1.64	1.88	2.11	11M-JB 1900	1.13		
10000	0.00	0.26	0.52	0.78	1.04	1.30	1.56	1.82	2.09	2.34	11M-JB 1950	1.14		

Belt length correction factor C_L

Belt ref.	Corr. factor C _L	Belt ref.	Corr. factor C _L
11M-JB 710	0.90	11M-JB 2000	1.15
11M-JB 730	0.91	11M-JB 2060	1.15
11M-JB 750	0.91	11M-JB 2120	1.16
11M-JB 775	0.92	11M-JB 2180	1.17
11M-JB 800	0.93	11M-JB 2240	1.17
11M-JB 825	0.94	11M-JB 2300	1.18
11M-JB 850	0.94		
11M-JB 875	0.95		
11M-JB 900	0.96		
11M-JB 925	0.96		
11M-JB 950	0.97		
11M-JB 975	0.98		
11M-JB 1000	0.98		
11M-JB 1030	0.99		
11M-JB 1060	1.00		
11M-JB 1090	1.00		
11M-JB 1120	1.01		
11M-JB 1150	1.02		
11M-JB 1180	1.02		
11M-JB 1220	1.03		
11M-JB 1250	1.04		
11M-JB 1280	1.04		
11M-JB 1320	1.05		
11M-JB 1360	1.06		
11M-JB 1400	1.06		
11M-JB 1450	1.07		
11M-JB 1500	1.08		
11M-JB 1550	1.09		
11M-JB 1600	1.09		
11M-JB 1650	1.10		
11M-JB 1700	1.11		
11M-JB 1750	1.12		
11M-JB 1800	1.12		
11M-JB 1850	1.13		
11M-JB 1900	1.13		
11M-JB 1950	1.14		

$$\text{Number of ribs required} = \frac{\text{Design kW}}{(A + B) \times G \times C_L}$$

DRIVE DESIGN EXAMPLE

DRIVE DESIGN EXAMPLE, USING A STANDARD SPEED ELECTRIC MOTOR AND STANDARD PULLEY DIAMETERS

GIVEN

1. A 24 kilowatt squirrel cage electric motor is to drive an air compressor with following characteristics: flow 4m³/min at 0.7 MPa (7 kg/cm²) according to DIN.
2. 2850 RPM motor speed.
3. The desired compressor speed is 1250 RPM.
4. Shaft to shaft centre distance should be about 760 mm. Because of space limitations, the maximum pulley datum diameter cannot exceed 220 mm.
5. Continuous service - one year of service is requested.

DRIVE DESIGN

Step 1

A one year belt service is normal for this kind of application, thus 6000 hrs life range needs to be taken.

Step 2

- A. From table No. 1 the normal service factor is 1.3
- B. The power requirement is 24 kW
- C. Design power = 1.3 x 24 kW = 31.2 kW

Step 3

From table No. 2, 3 or 4 find the proper cross-section: Gates Quad-Power II, moulded notch, XPA section.

Step 4

$$\text{Speed ratio: } \frac{2850}{1250} = 2.28$$

Step 5 & 6

Pulley diameters can be selected from tables Nos. 5 and 6. In this case space availability is the limiting factor. For that reason we have to start from the driveN pulley. With a maximum of 220 mm, locate a possible large pulley diameter range in the top row of table No. 6 and go down to find a speed ratio close to 2.28. Using a driveN pulley of 212 mm and a ratio of 2.23 the driveR becomes 95 mm.

$$V = \frac{95 \times 2850}{19100} = 14.2 \text{ m/s}$$

Step 7

- A. Tentative belt length:

$$2 \times 760 + 1.57 (212 + 95) + \frac{(212 - 95)^2}{4 \times 760} = 2006 \text{ mm}$$

- B. From the size listing on page 14, find the closest standard datum length to be 2000 mm or XPA 2000. Then calculate the actual centre distance:

$$F = 2000 - 1.57 (212 + 95) = 1518 \text{ mm}$$

$$\frac{D-d}{F} = \frac{212 - 95}{1518} = 0.0771$$

from table No. 9: h = 0.04

$$A = \frac{1518 - 0.04 (212 - 95)}{2} = 757 \text{ mm}$$

Step 8

- A. From table A find the basic kW rating: 6.29 kW
- B. From table B find the additional kW for speed ratio: 0.66 kW
- C. Table C gives the additional kW for belt life:

$$C = \frac{95 \times 2850}{202922} = 1.33$$

RESULTS

Service life range: 6000 hrs.

Service factor: 1.3

Design power: 31.2 kW

Belt section: XPA

Speed ratio: 2.28

d: 95
D: 212

Belt speed: 14.2 m/s

Tentative belt length: 2006 mm

Standard datum length:
2000 mm or XPA 2000

Actual centre distance: 757 mm

Basic kW A: 6.29 kW
Additional kW B: 0.66 kW

Additional kW C: 1.33 kW

DRIVE DESIGN EXAMPLE

Open the cover flap and follow step by step the drive design method.

$$\frac{D-d}{A} = \frac{212 - 95}{757} = 0.15$$

- D. From table G find the arc of contact correction factor G: 0.98
- E. Table C_L gives the belt length correction factor: 0.98
- F. Net kW per belt: (6.29 + 0.66 + 1.33) x 0.98 x 0.98 = 7.95
- G. Number of belts required:

$$\frac{31.2}{7.95} = 3.92 \text{ or } 4 \text{ belts}$$

$$\text{Pulley width: } (3 \times 15) + (2 \times 10) = 65 \text{ mm}$$

Arc correction factor G: 0.98
Length correction factor C_L: 0.98
Net kW per belt: 7.95

Number of belts: 4

Pulley width: 65 mm

Step 9

From table No. 11 find the:

- minimum allowance on centre distance for installation: 25 mm
- minimum allowance on centre distance for takeup: 40 mm

Installation allowance: 25 mm
Takeup allowance: 40 mm

THE DRIVE REQUIRES 4 GATES QUAD-POWER II BELTS WITH CROSS-SECTION XPA 2000

TENSIONING

Step 10

Static tension per belt (Table No. 13: M = 0.104)

$$T_s = 450 \times \frac{(2.5 - 0.98)}{0.98} \times \frac{24.0}{4 \times 14.2} + 0.104 \times (14.2)^2 = 316 \text{ N}$$

Static tension per belt: 316 N

Step 11

A.

$$\text{Span length } t = 757 \left[1 - 0.125 \left(\frac{212 - 95}{757} \right)^2 \right] = 755 \text{ mm}$$

Span length: 755 mm

B.

$$\text{Deflection} = \frac{755}{100} = 7.55 \text{ mm}$$

Deflection: 7.55 mm

C. Minimum and maximum recommended deflection forces:
(Table No. 13: Y = 20)

$$\text{Minimum recommended deflection force} = \frac{316 + 20}{25} = 13.4 \text{ N}$$

Min. deflection force: 13.4 N

$$\text{Maximum recommended deflection force} = \frac{1.5 \times 316 + 20}{25} = 19.8 \text{ N}$$

Max. deflection force: 19.8 N

Kilowatt rating tables (Step 8)

Section	Page	Section	Page	Section	Page	Section	Page
XPZ-3VX	48 - 49	SPB-SPB PowerBand®		Z	68 - 69	PJ	78 - 79
XPA	50 - 51	5V-15J	60 - 61	A	70 - 71	PL	80 - 81
XPB-5VX	52 - 53	SPC-SPC		B	72 - 73	PM	82 - 83
XPC	54 - 55	PowerBand®	62 - 63	C	74 - 75	5M-JB	84 - 85
SPZ-3V-9J	56 - 57	8V-25J	64 - 65	D	76 - 77	7M-JB	86 - 87
SPA	58 - 59	8VK	66 - 67			11M-JB	88 - 89



USEFUL DATA

EXPLANATION OF SYMBOLS

Physical quantity	Symbol	Unit	Abbreviation
Power	P	kiloWatt	kW
Torque	T	Newton metre	Nm
Force	F	Newton	N
Kinetic energy	Ek	Joule	J
Time	t	second	s
Velocity of rotation	n	rev./min.	rpm
Pulley datum diameter	D or d	millimetre	mm
Shaft centre distance	A	millimetre	mm
Belt datum length	L	millimetre	mm
Belt speed or velocity	V	metre/second	m/s
Mass	m	kilogramme	kg
Belt mass per datum length unit	M	gramme/metre	g/m
Belt effective tension	T _e	Newton	N
Belt centrifugal tension	T _c	Newton	N

FORMULAE

Belt speed

Conversion factor: 1 ft/min. = 0.00508 m/s

Metric units: $V \text{ (m/s)} = \frac{d \times n}{19100}$

Imperial units: $V \text{ (ft/min.)} = 0.262 \times d \times n$

Power

Metric units: $P \text{ (kW)} = \frac{T_e \times V}{10^3}$

$P \text{ (kW)} = \frac{T \times n}{9.55 \times 10^3}$

Torque

Metric units: $T \text{ (Nm)} = \frac{9.55 \times 10^3 P}{n}$

Belt effective tension

Metric units: $T_e \text{ (N)} = \frac{2 \times 10^3 T}{d}$

Belt centrifugal tension

Metric units: $T_c \text{ (N)} = \frac{MV^2}{10^3}$

CONVERSION TABLE


1 lbf	=	0.454 kgf
1 lbf	=	4.448 N
1 kgf	=	9.807 N
1 lbf in	=	0.113 Nm
1 ft	=	0.3048 m
1 in	=	25.4 mm
1 ft ²	=	0.093 m ²
1 in ²	=	645.16 mm ²
1 ft ³	=	0.028 m ³
1 in ³	=	16.387 cm ³
1 oz	=	28.35 g
1 lb	=	0.454 kg
1 UK ton	=	1.016 ton
1 UK gal	=	4.546 litre
1 UK pint	=	0.568 litre
1 radian	=	57.296 degree
1 degree	=	0.0175 radian
1 HP	=	0.746 kW



DESIGNFLEX 98.2 CALCULATION SOFTWARE

You can calculate your own application by means of one of Gates' design manuals (see also p. 94) or by using DesignFlex 98.2, a windows based multilingual software program. DesignFlex 98 comes on six 3.5" floppy diskettes or on one CD-ROM. The program offers a step by step drive calculation procedure for both V-belts and synchronous belts based on the criteria and/or limitations specified by the user. By means of an easy to follow menu, two pulley drives are calculated and drive results are displayed in order of suitability depending on priorities chosen by the user (e.g. price, compactness, rpm, etc.).

Running under Windows 3.1 or higher, Windows NT or Windows 95, DesignFlex 98.2 requires a 486 or higher computer system. Ref.: E/20098 CD-ROM; E/20091 diskettes (multilingual).

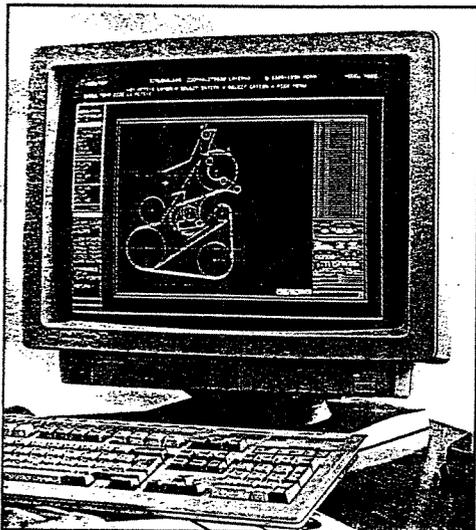

GATES APPLICATION ENGINEERS: AT YOUR SERVICE

If your application cannot be designed with the aid of Gates' design manuals or the DesignFlex software, you can always contact Gates' design engineers. They are at your service to solve even the most difficult drive design problem and will calculate your drive design free of charge with a minimum of delay.

You only have to provide us with following data:

- absorbed power;
- rpm of driver and driven shafts;
- original diameter of pulleys or sprockets, or speed ratio planned;
- centre distance;
- type of application.

GATES' INDUSTRIAL BELT AND DRIVE PREVENTIVE MAINTENANCE MANUAL

This unique maintenance manual advises engineers and machine operators how to install and periodically maintain Gates' industrial Vee- and synchronous belts.

It guides the user through maintenance checklists for a more thorough inspection in order to improve the service life of belt drives, reduce downtime and production standstills. By means of an overview of Gates' industrial belt range and a belt and pulley installation procedure, the appropriate belt can be selected and a quick installation or replacement can be made. The most common drive problems are described in a troubleshooting guide, providing a list of possible causes and appropriate corrective actions. The user can rely on a range of technical tools to determine the cause of the drive problem.

Besides the numerous safety recommendations, the manual contains guidelines on belt storage in order to avoid unfavourable conditions affecting belt performance.

Ref.: E2/20087

GATES LITERATURE

General

- Industrial Belts - catalogue (E2/20054)
- Industrial Belts - brochure (E2/20069)
- Industrial belt and drive preventive maintenance manual (E2/20087)

V-Belts

- Quad-Power II leaflet (E2/20095)
- Super HC® MN leaflet (E2/20076)
- Hi-Power® MN leaflet (E2/20071)
- Micro-V® leaflet (E2/20059)
- Polyflex® JB™ leaflet (E2/20055)

Synchronous Belts

- PowerGrip® GT, PowerGrip® HTD, PowerGrip® Synchronous belt design manual (E2/20099)
- Long Length design manual (E2/20065)
- Poly Chain® GT design manual (E2/20067)
- Poly Chain® GT manual for roller conveyors (E2/20086)
- Poly Chain® GT leaflet (E2/20078)
- Poly Chain® GT Long Length leaflet (E2/20089)
- PowerGrip® GT leaflet (E2/20062)
- PowerPainT™ leaflet (E2/20100)

ADDRESSES

Operations

BELGIUM

Gates Europe nv
Dr. Carlierlaan 30
B - 9320 Erembodegem
TI : (32) 53 / 76 27 11
Fx : (32) 53 / 76 27 13

FRANCE

Gates S.A.
Power Transmission Div.
111, rue Francis Garnier
B.P. 37
F - 58027 Nevers - Cedex
TI : (33) 3 / 86 71 75 00
Fx : (33) 3 / 86 36 62 47

GERMANY

Gates GmbH Aachen
Eisenbahnweg 50
D - 52068 Aachen
TI : (49) 241 / 5108-0
Fx : (49) 241 / 5108-297

SPAIN

Gates S.A.
Polígono Industrial
Les Malloles
E - 08660 Balsareny
(Barcelona)
TI : (34) 93 / 877 70 00
Fx : (34) 93 / 877 70 39

UK

Gates
Power Transmission Ltd
Tinwald Downs Road
Heathhall - Dumfries
DG1 1TS
TI : (44) 1387 / 24 20 00
Fx : (44) 1387 / 24 20 10

Sales and marketing facilities

FRANCE

Gates France S.A.R.L.
B.P. 37
Zone Industrielle
F - 95380 Louvres
TI : (33) 1 / 34 47 41 41
Fx : (33) 1 / 34 72 60 54

GERMANY

Gates GmbH Langenfeld
Haus Gravener Str. 191-193
D - 40764 Langenfeld
TI : (49) 2173 / 795-0
Fx : (49) 2173 / 795-150

ITALY

Gates S.R.L.
Via Senigallia 18
(Int. 2 - Blocco A - Edificio 1)
I - 20161 Milano MI
TI : (39) 02 / 662 16 21
Fx : (39) 02 / 645 86 36



Gates homepage:
<http://www.europe.gates.com>

© Gates Europe nv 1999

Important

Every effort has been made to ensure accuracy and comprehensiveness of the information included in this catalogue. However Gates cannot be held responsible for errors or omissions and for alterations occurred after release for printing; or if Gates products are used in special or exceptional circumstances without prior consultation with and clearance from a Gates representative.

This issue is released February 1999 and supersedes all previous versions. If your V-belt drive design manual is more than 2 years old, please consult a Gates representative to check whether you have the latest version.

DRIVE DESIGN

- | | | |
|----------|---|-------|
| 1 | Select the desired service life range | p. 23 |
| 2 | Find the design power | p. 25 |
| 3 | Select the proper V-belt section | p. 25 |
| 4 | Find the speed ratio | p. 30 |
| 5 | Choose the pulley datum diameter | p. 30 |
| 6 | Calculate the belt speed | p. 30 |
| 7 | Select centre distance and V-belt length | p. 31 |
| 8 | Find the number of belts or ribs required | p. 33 |
| | A. Find the basic kW rating (A). | |
| | B. Find the additional kW rating for speed ratio (B). | |
| | C. Find the additional kW rating for belt life (C). | |
| | D. Find the arc of contact correction factor (G). | |
| | E. Find the belt length correction factor (C_L). | |
| | F. Calculate the net kW per belt or rib. | |
| | G. Find the number of belts or ribs required. | |
| | Kilowatt rating see page p. 91. | |
-





- | | | |
|----------|--|-------|
| 9 | Provide the minimum installation and takeup allowances | p. 33 |
|----------|--|-------|
-

TENSIONING

- | | | |
|-----------|---|-------|
| 10 | Find the required tension per rib/strand or belt (static tension) | p. 35 |
| 11 | Determine the minimum and maximum recommended forces to deflect one belt (or one band of belts if PowerBand®, Micro-V® or Polyflex® JB™ is used) 1 mm per 100 mm of span length | p. 35 |
| 12 | Check if the belts are properly tensioned | p. 36 |
-



The world's most trusted name
in belts and hose.

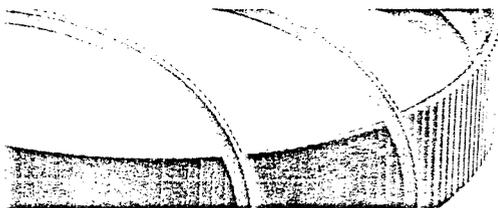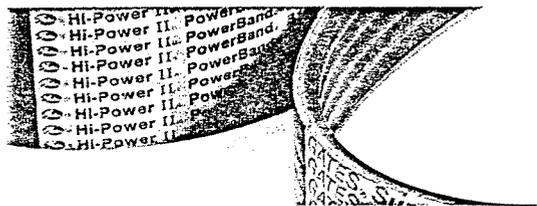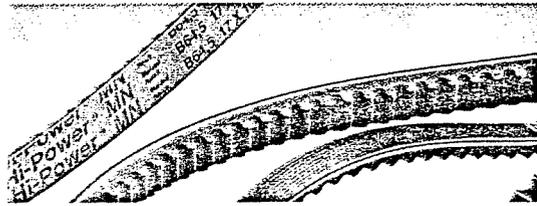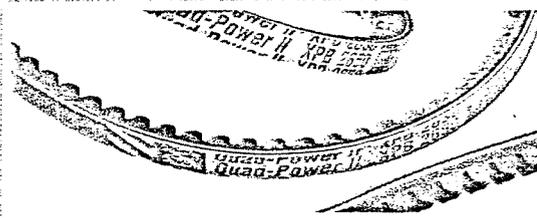

Ammerraal Beltech

Rua Eng. Frederico Guilherme, 2004
Apartado 1364
Zona Industrial da Maia
4479-909 Maia
T +351 229 479 440
F +351 229 413 081 / 229 441 250
ammat@beltech.pt

Filial Lisboa:
Rua Eng. João Pereira, 23
Monte Estoril
T +351 21 4 20 000
F +351 21 4 20 000
T +351 21 4 20 000
F +351 21 4 20 000
ammat@beltech.pt